

PHOTOCONTROLLER

JL-214 / 224 series



JL-214

- *ANSI C136.10-1996 Twist Lock*
- *Time Delay of 5-30 seconds*
- *Multi-Volts Available*
- *Surge Arrester Built-In*
- *Phototransistor Employed*

JL-224



Product Summary

The photocontroller JL-214/224 series is applicable to control the street lighting, garden lighting, passage lighting and doorway lighting automatically in accordance with the ambient natural lighting level.

This product is designed with electronic circuits with sensor of phototransistor and a surge arrester (MOV) is provided. Its quicker response with time delay of 5-30 seconds offers easy-to-test feature. Especially, model JL-214B/224B has an omni-directional face-top sensor for customer applications per BS5972-1980.

Further, a preset 5-30 seconds time-delay might avoid mis-operation due to spotlight or lightning during the night time.

This product provides twist lock terminals meets the requirements of ANSI C136.10-1996 and this series conforms the CE and RoHS directives.


Technical Data

Model	JL-214A/224A	JL-214/224B	JL-214/224C
Rated Voltage	110-120VAC	220~240VAC	110-277VAC
Applicable Voltage Range	100-140VAC	200~260VAC	105-305VAC
Rated Frequency	50/60Hz		
Rated Loading	1000W Tungsten, 1800VA Ballast		
Power Consumption	1.5VA		
On/Off Level	6Lx On 50Lx Off		
Ambient Temp.	-40°C ~ +70°C		
Related Humidity	99%		
Overall Size	84 (Dia.) x 66mm		
Weight Approx.	80 grs		

Installation

Disconnect power; wire the receptacle according to the diagram in right hand. Push the photocontroller on and twist it clockwise to lock it into the receptacle.

Install the photocontroller with the Photocell facing the NORTH direction as indicated on the top of the photocontroller. Adjust the receptacle position if necessary.

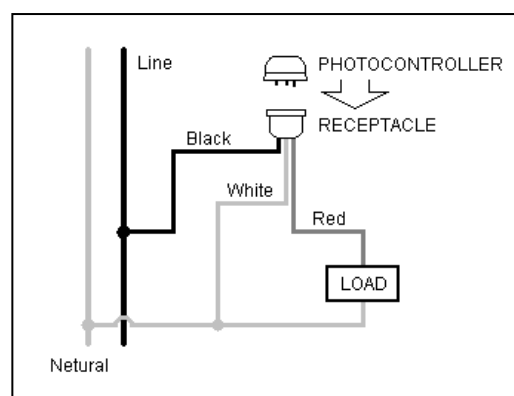

Ordering Information

JL-214B* - HP**

* Model Number;

** High Power version: 30Amp relay used for 1000W-3000W