

LF-BDD040-1050-42 Pro

Compact DALI Dimmable NFC Constant Current LED Driver



Product family features

- DALI&PUSH dimmable
- Dimming range: 1% to 100%
- High efficiency up to 89%
- Output voltage range: 9-42V
- Low THD<8%
- LED driver temperature guard via internal OTP
- 5 years guarantee



Product family benefits

- Advanced functions: EL, CorridorDIM, CLO, internal OTP, and LED driver temperature monitoring
- DALI-2 part ext. 251, 252 and 253
- Output current and parameters adjustable via DALI programmer or NFC
- 2 sets of L/N at the input convenient for multiple luminaires connected in series with large terminal for screw-free wiring
- According to Zhaga Book13, 24
- Surge level: PUSH: 1kV, L-N: 2kV

Typical applications

- For downlight and panel light
- For office, commercial and residential lighting

Product parameters

- | | |
|-----------------------------|--------------------------|
| — Output current 500-1050mA | — Output voltage 9-42Vdc |
| — Output power 9.45-42W | — Efficiency 89% |
| — Input voltage 198-264Vac | |

Electrical data

Input data

Rated input voltage	220 ... 240 V
AC voltage range	198 ... 264 V
Mains frequency	0/50/60 Hz
Input voltage DC	180... 264V
Power factor	0.95
Efficiency in max. power	89%
THD	<8%
Input current	0.25A Max
Inrush current	32A ¹⁾
Loading number on circuit breaker 10 A (B)	27
Loading number on circuit breaker 10 A (C)	31
Loading number on circuit breaker 16 A (B)	43
Loading number on circuit breaker 16 A (C)	50
Protective conductor current	≤0.7mA
Stand-by power consumption	<0.5W

Output data

Nominal output voltage	9...42V
Nominal output current	500...1050mA
Default output current	1050mA
Current set	NFC/Lifud programmer/NFC app
Maximum output power	42W
Nominal output power	9.45 ... 42W
Output current tolerance	±5%
Output ripple current (100 Hz)	±3.3 %
Flicker	According to IEEE Std 1789-2015
CIE SVM	≤0.4
IEC-Pst	≤1
Temperature tolerance	±10%
Start-up time	<1.5S

Safety

Withstanding voltage	I/P-O/P: 3.75kV&5mA&60S; I/P-DA1/DA2, O/P-DA1/DA2: 1.5kV&5mA&60S
Surge capability (L-N)	2kV
PUSH ²⁾	1kV
Insulation resistance	I/P-O/P, I/P-DA1/DA2, O/P-DA1/DA2: >100MΩ@500VDC
Guarantee	5 years ³⁾


1) t =200μs

2) The surge test wiring at the PUSH terminal is connected in parallel with L-N.


3) 5 years @Tc≤87°C

Characteristic diagrams


Operating Window

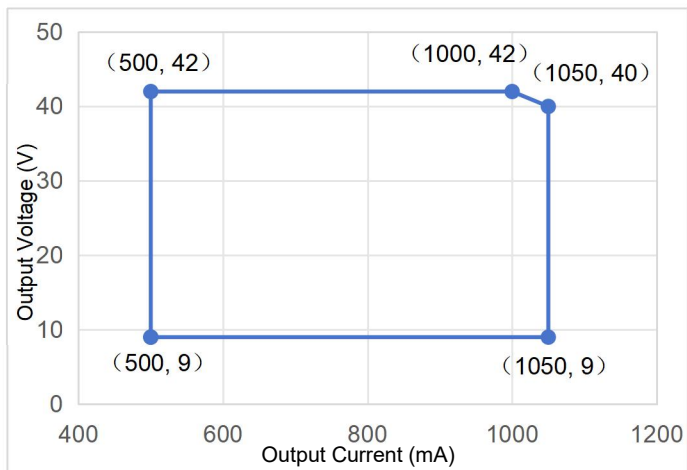


Typical Efficiency vs Load

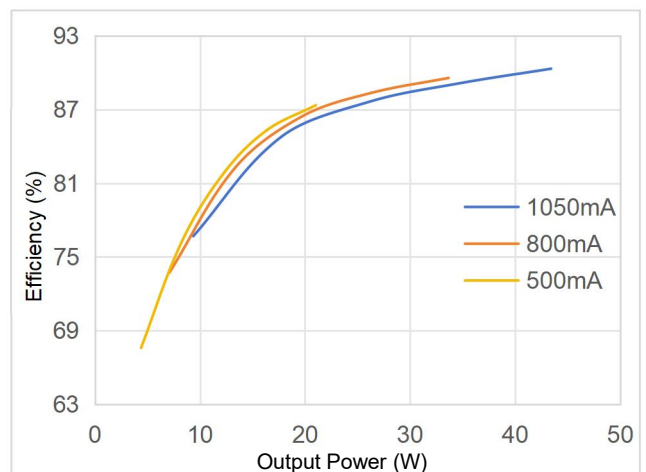


Typical Power Factor vs Load

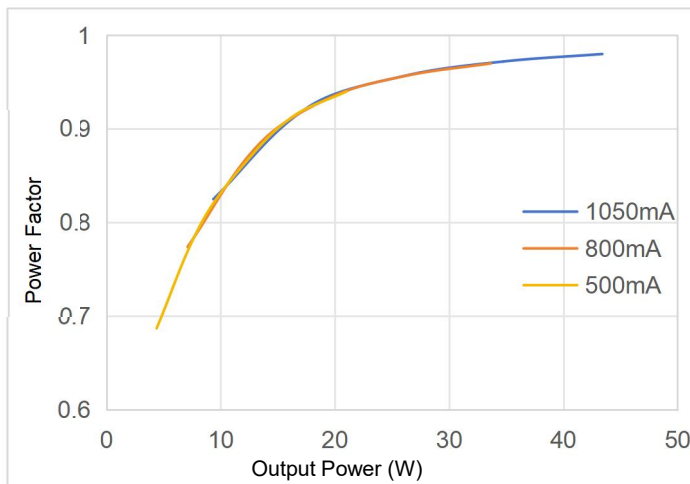


Typical THD vs Load

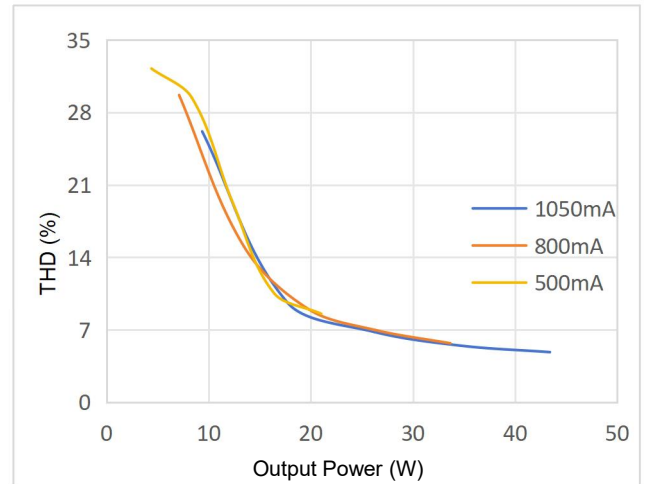

Lifespan

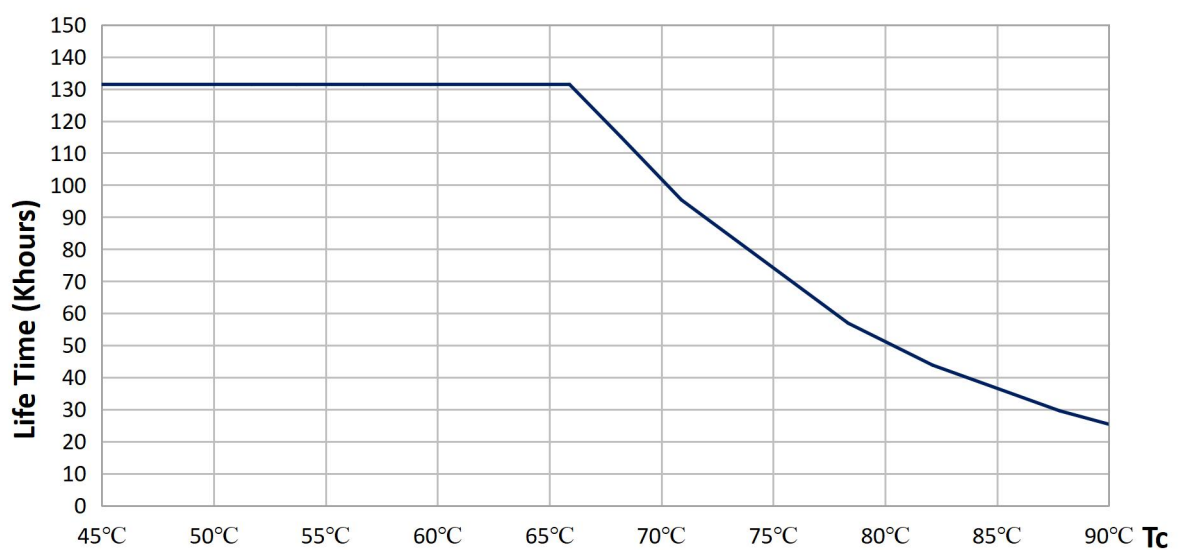

Dimensions

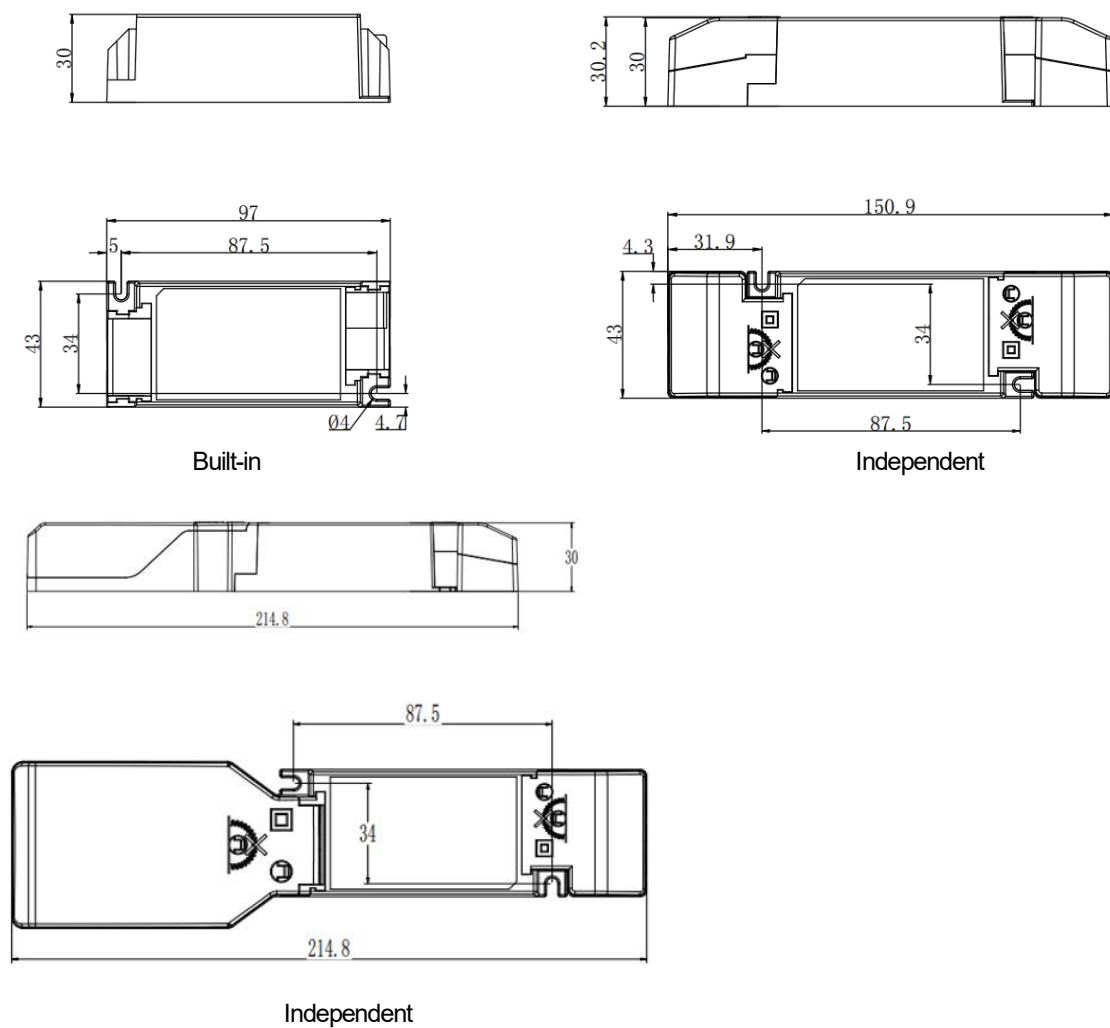

Mounting hole spacing, length	87.5mm
Product weight	160g
Cable cross-section, input side	0.75 ... 1.5 mm ²
Cable cross-section, output side	0.5 ... 1.5 mm ²
Cable outer diameter, input side	3...8mm (Short strain-relief) 3...10mm (Long strain-relief)
Cable outer diameter, output side	3...8mm (Short strain-relief)
Wire preparation length, input side	7 ... 8mm
Wire preparation length, output side	7 ... 8mm
Length	97.0mm
Width	43.0mm
Height	30.0mm

Colors & materials


Casing material	PC
Casing color	White

Temperature & operating conditions

Ambient temperature range	-30°C - +60°C ¹⁾
Maximum temperature at tc test point	90°C
Temperature range at storage	-30°C - +80°C (6 months in Class I environment)
Humidity range at storage	20-75%RH (no condensation)
Humidity during operation	20-95%RH (no condensation)
Atmospheric pressure	80-106KPa
RoHS	RoHS 2.0 (EU) 2015/863

1) Output power $\geq 40W$, ambient temperature range: -30°C - +57°C

Tc test point

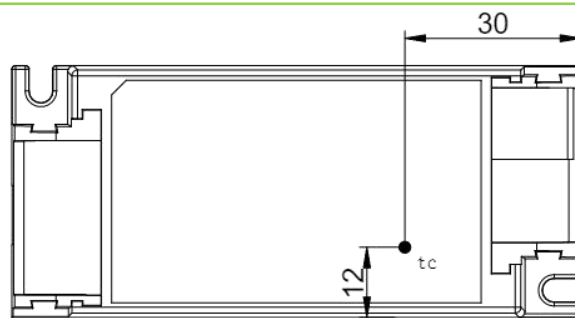


Tc point is at the top of LED driver

Product terminal


Input		Output	
DA1 PUSH	DALI/PUSH dimming input	LED+	Positive terminal output of LED driver
DA2 PUSH	DALI/PUSH dimming input	LED-	Negative terminal output of LED driver
AC-L	AC live wire input		
AC-N	AC neutral wire input		

Protective characteristics schematic diagrams

Schematic diagram of input undervoltage protection

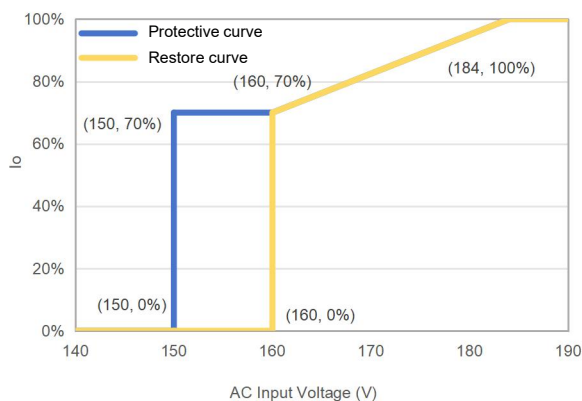

Schematic diagram of input overvoltage protection

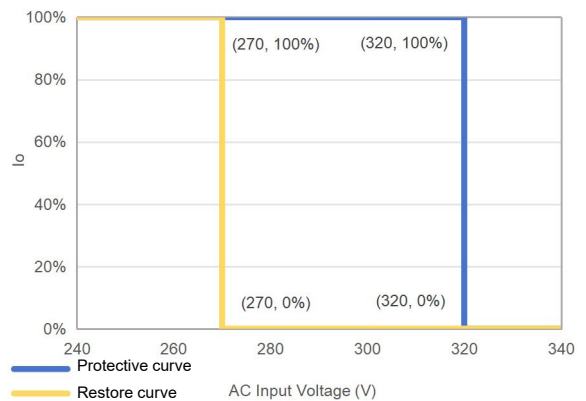

Protective characteristics

Protective type		Min.	Typ.	Max.	Introduction
Input undervoltage protection	Protective voltage	145Vac	150Vac	155Vac	When the input voltage is lower than the protective voltage, the light will be off.
	Restore voltage	156Vac	160Vac	165Vac	When the input voltage is higher than the restore voltage, the light can be automatically turned on.
Input overvoltage protection	Protective voltage	310Vac	320Vac	330Vac	When the input voltage is higher than the protective voltage, the light will be off.
	Restore voltage	261Vac	270Vac	278Vac	When the input voltage is lower than the restore voltage, the light can be automatically turned on.

Note: By default, only the input undervoltage and input overvoltage states are reported, and the light will not be turned off. It will enter the power-off protection mode only after the software settings are activated.

Over-temperature protection description

Internal over-temperature protection	Mode 1	Reduce the current before turning off the light in the case of over-temperature	T1 (start to reduce the current)	82℃	85℃	88℃	When the internal temperature rises to T1, the internal thermal protection will be triggered and the output current will gradually decrease.
			T2 (stop reducing the current)	85℃	88℃	91℃	When the internal temperature rises to T2, the output current will be reduced to the programmed protection current value (default is 50% I _o).
			T3 (turn off the light)	88℃	91℃	94℃	When the internal temperature rises above T3, the light will be off, and when the temperature drops below T1, the light can be automatically turned on.
	Mode 2	Turn off the light in the case of over-temperature	T3 (turn off the light)	88℃	91℃	94℃	When the internal temperature rises above T3, the light will be off. The AC needs to be restarted to restore the lights.


Capabilities

Dimmable	DALI/PUSH dimmable
Dimming range	1 ... 100%
Over-temperature protection	Yes
Overload protection	Yes
Short circuit protection	Hiccup mode (Automatic reversible)
No-load protection	<59V
Suitable for fixtures with prot. class	II

Programming interface	DALI / NFC
Control interface	DALI
Number of channels	1 channel
CorridorDIM	Yes
EL	Yes
CLO	Yes
DALI Part 251 252 253	Yes


Dimming function instructions

• DALI dimming function

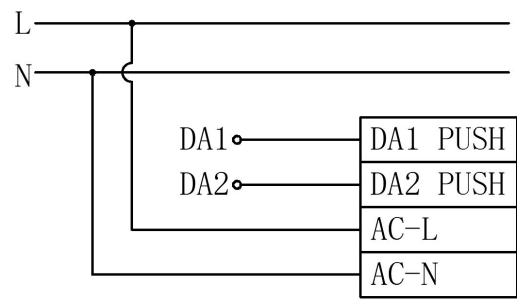


Wiring diagram of DALI dimming

- ① Default setting brightness is 100%.
- ② Connect DALI signal to DA1 PUSH and DA2 PUSH.
- ③ DALI protocol includes Max.16 scene groups.
- ④ Maximum number of LED drivers connected in parallel in DALI dimming mode: 64 pcs.
- ⑤ Minimum dimming depth of DALI dimming: 1%.

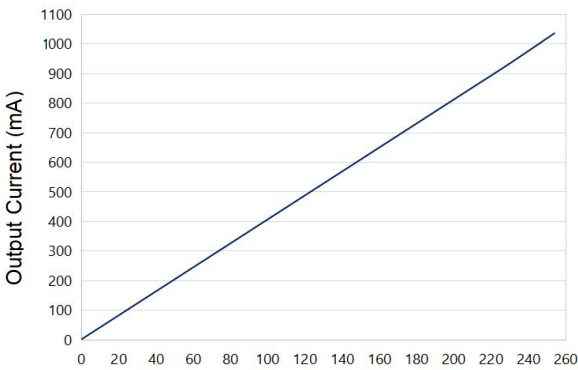


Linear dimming

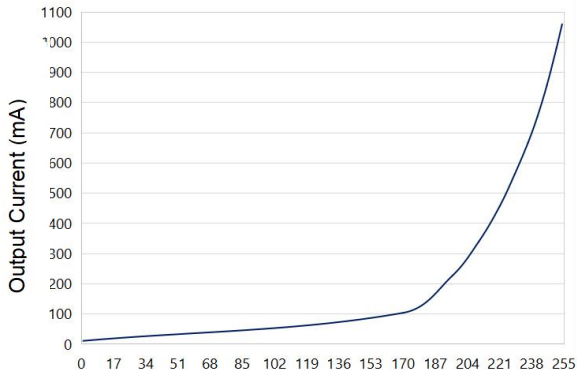

Logarithmic dimming

Note: The DALI and PUSH dimming functions cannot be used simultaneously; otherwise, the DALI dimmer will be damaged.

• PUSH dimming function

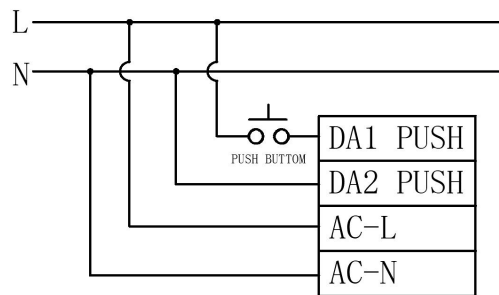

Wiring diagram of PUSH dimming


Switch from DALI mode to PUSH mode: short press PUSH switch to enable PUSH dimming function.

- ① Connect PUSH switch between AC-L and DA1 PUSH in series and connect DA2 PUSH to AC-N.
- ② Make sure that AC-L and AC-N are NOT directly connected to DA1 PUSH and DA2 PUSH terminals.
- ③ Make sure that PUSH switch is off before the AC is powered on; operate PUSH after the AC is powered on.
- ④ Make sure the PUSH switch is off before disconnecting the AC.
- ⑤ If you have any questions about the wiring and operation, please confirm with Lifud FAE.
- ⑥ Wrong wiring or operation may cause damage to the driver.

Operation	Duration	Function
Instant Push	0.1-0.5S	LED light on/off
Long Push	0.6-9S	LED light dims up/down
Reset Push	> 9S	Reset the brightness of luminaire to 50%

- ① The PUSH operation won't cause any variations on LED driver if it's less than 0.1S.
- ② Minimum dimming depth of PUSH dimming: 1%
- ③ The PUSH dimming mode has the memory function in case of any power failure. When the LED driver is powered on again, the light will return to the previous state before power failure.
- ④ The present dimming direction of PUSH dimming is opposite to the former one.
- ⑤ In automatic mode, long press for more than 3 minutes to enter the corridor dimming function.

• Corridor dimming function

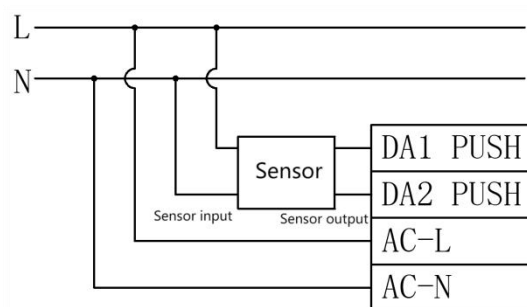

Wiring diagram of corridor dimming

Operations for entering corridor lighting mode

Approach 1: use Lifud programmer to enable the driver's corridor lighting mode and set parameters.

Approach 2: keep pressing PUSH for 3+ mins so as to switch to the corridor lighting mode.

Approach 3: keep the effective sensing signal for 3+ mins (set the sensor's hold time to 3+ mins) to enable the corridor lighting mode.

Remarks:

1. In the automatic detection mode, the driver can be switched from PUSH mode to corridor lighting mode by approach 2 and 3, and its brightness will dim up to 50%; long press for 3 mins and then it dims down first and then dims up, which means the driver has entered the corridor lighting mode.
2. After activating the corridor dimming mode, PUSH DIM is turned off.
3. In the case of AC input and any level of brightness in the corridor lighting mode, switching to DC and then returning to AC will restart the corridor lighting mode.

Operations for exiting corridor lighting mode

Approach 1: use Lifud programmer to choose other modes and exit corridor lighting mode.


Approach 2: connect the driver to the DALI master to send DALI command, and the driver will return to the DALI dimming mode.

Approach 3: connect the driver to the PUSH switch and continuously press the switch 10 times within 10 secs, and the driver will return to the PUSH dimming mode.

Remark:

1. The 3-sec or above single press or release will cause the press number to be counted as 0.
2. The approach 2 and 3 CANNOT be used if the corridor lighting mode of driver is set via Lifud programmer.

Working process of corridor dimming mode

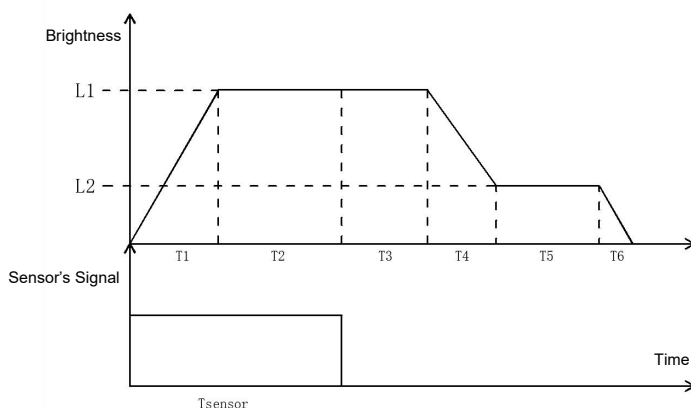

Symbol	Name	Default value	Available setting scope
T1	Fade-in time of sensing	1s	0-100s
T2	Holding time of sensing	Depends on sensor	Depends on sensor
T3	Waiting time of sensing	180s	0-59999s, 60000s (infinite)
T4	Fade-out time of sensing	5s	0-100s
T5	Unattended time	60000s (infinite)	0-59999s, 60000s (infinite)
T6	Fade-out off time	0s	0-100s
L1	Sensing brightness	100%	0-100%
L2	Unattended brightness	10%	0-100%

Emergency function instructions

The default output current is 15% Io max in the case of DC emergency input.

Emergency input voltage: 180-264Vdc

Note:

1. The emergency output current can be set via Lifud programmer and programming software(or FEIG NFC reader).
2. It can be set from 0 to 100%. (when the output current is 500-735mA, it can be set to 500-735mA in emergency state; when the output current is 735-1050mA, it can be set up to 735mA in emergency state).
3. If the emergency mode is off, input current is DC and the working mode is the same as the AC input with normal dimming functions.
4. In the case of mains input, the brightness is random when using PUSH dimming. When the driver enters the emergency lighting mode and then reconnects AC, the light brightness will remain the one set via PUSH switch when mains is connected.
5. In the case of mains input, the brightness is random when using DALI dimming. When the driver enters the emergency lighting mode and then reconnects AC, the light brightness will return to the brightness when DALI is powered on.

Programmer tools and software


Product	Name	Brand	Model	Software
	NFC desktop programmer	FEIG	ID CPR30+	Lifud SmartSet
	NFC handheld programmer	FEIG	ID ISC.PRH101-USB	Lifud SmartSet
	NFC batch programmer	FEIG	ID ISC.LRM1002-E ID ISC.ANT300/300-A	Lifud SmartSet
	Lifud programmer	LIFUD	LF-SCS080C	Lifud SmartSet
	NFC App	LIFUD	-	Lifud NFC

Read/write and parameter configuration

Programming project	Default settings	Parameters settings	Read/Write
Production information	-	No	Read
Output current	1050mA (default)	Yes	Read/Write
Operating mode	Automatic detection (DALI/PUSH)	Yes	Read/Write
EL	15% (default)	Yes	Read/Write
CorridorDIM	Inactivated	Yes	Read/Write
CLO	Inactivated	Yes	Read/Write
Internal overheating protection	Activated	Yes	Read/Write
DALI Part 251	Activated	Yes	Read/Write
DALI Part 252	Activated	Can only be reset	Read/Write


NFC function instructions

①NFC

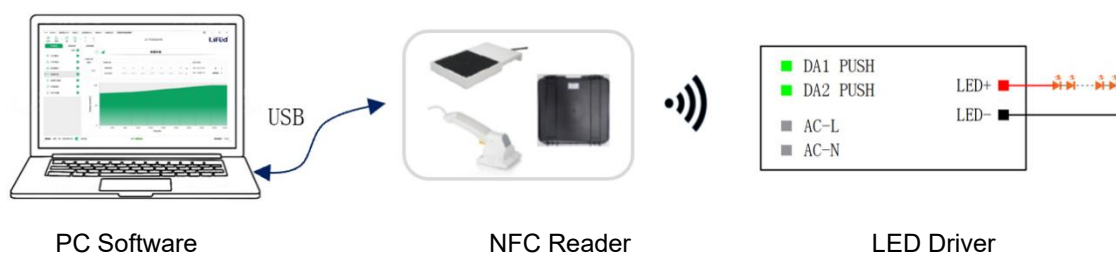

Note: When using the NFC reader, the driver is not allowed to operate while powered on. The driver must be powered off and completely discharged before it can read and write normally.

②Lifud programmer

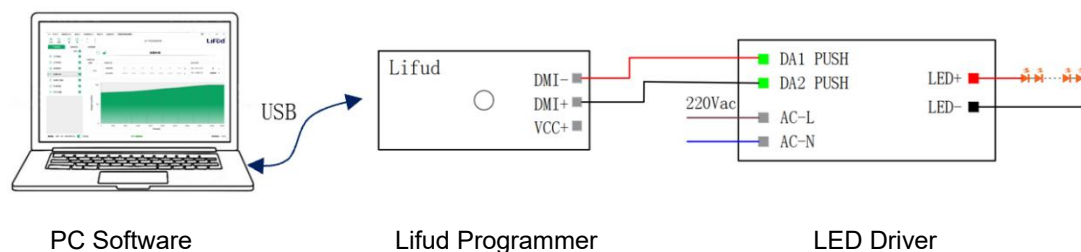

Note: When using the programmer, the driver must be powered on with AC for normal reading and writing.

③NFC APP



QR Code for NFC APP Download



Note: When using the NFC APP for parameter setting, the driver is not allowed to operate while powered on. The driver must be powered off and completely discharged before it can read and write normally.

Certificates & standards

Approval marks	CCC, ENEC, UKCA, CE, CB, EL, RCM, DALI-2
Standards	GB 19510.1-2009; GB 19510.14-2009; GB 7000.1-2015; GB 17625.1-2022; GB/T 17743-2021 EN 61347-2-13; EN 61347-1; EN 62384; EN 62493; EN 55015; EN 61547; EN 61000-3-2; EN 61000-3-3; IEC61347-1; IEC61347-2-13; EN IEC 61347-2-13 Annex J; AS 61347.2.13 & AS/NZS 61347.1
Type of protection	IP20

Logistical data

Product	Packaging unit (Pieces/Unit)	Dimensions (L*W*H)	Volume	Gross weight
LF-BDD040-1050-42 Pro	36	310 mm*285 mm*155 mm	13.69 dm ³	5.76kg±5%

Test equipment & condition

Test equipment	AC power source: CHROMA6530, digital power meter: CHROMA66202, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: EEC SE7440, flicker tester (flicker-free coefficient test): Everfine LFA-3000, etc.
----------------	---

If there are no special remarks, the above parameters are tested at the ambient temperature of 25℃, humidity of 50%, maximum output load and input voltage of 230Vac/50Hz.

Additional information

1. It is recommended that user install the over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety.
2. The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished.
3. The number of LED drivers that can be connected to a circuit breaker and the inrush current are tested under the same conditions.
4. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above.
5. DC input is only for emergency.
6. Lifud Technology Co., Ltd. reserves the right to interpret any content of this specification.

Transportation & storage

Suitable transportation means: vehicles, boats and aeroplanes.

In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact on LED driver as much as possible.

The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

Cautions

Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.

Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.

Man-made damage is beyond the scope of Lifud warranty service.

Disclaimer

Subject to change without notice. Errors and omissions excepted. Always make sure to use the most recent release.