

STRADA-2X2-B2-STP

Beam for area lighting and applications demanding a wide oval beam pattern


TECHNICAL SPECIFICATIONS:

Dimensions	50 x 50 mm
Height	5.2 mm
Fastening	pin, screw
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	5.5 kg
Quantity in Box	800 pcs
ROHS compliant	yes ⓘ




MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
STRADA-2X2-B2-STP	Lens	PMMA	clear



Isometric view
Scale 1:1




This drawing applies to:
C13936_STRADA-2X2-B2-STP
C13937_STRADA-2X2-C-STP

Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: Up to 3000 class M, otherwise class C. According to DIN ISO 2768-2 Form and position: class L	LEDIL Ledil Oy Salorankatu 10 FIN 24240 SALO Finland			
THIRD ANGLE PROJECTION: 	DRAWING TITLE Datasheet_STRADA-2X2-STP			
This drawing is the property of LEDIL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDIL Oy.*	SIZE A3	PART NUMBER -		
	SCALE 2:1	WEIGHT (g)		SHEET 1/1


PHOTOMETRIC DATA (MEASURED):




LED QUICK FLUX XTP 2x4 xxx LS G5
 FWHM 118.0 + 45.0°
 Efficiency 94 %
 Peak intensity 0.590 cd/lm
 Required components:

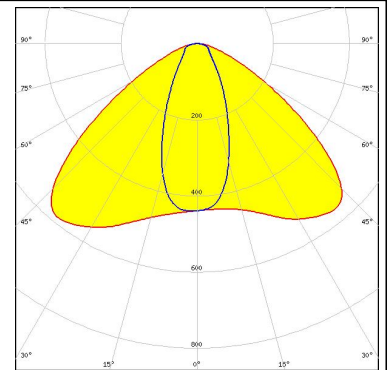



LED QUICK FLUX XTP 2x6 xxx LS G5
 FWHM 119.0 + 45.0°
 Efficiency 94 %
 Peak intensity 0.600 cd/lm
 Required components:

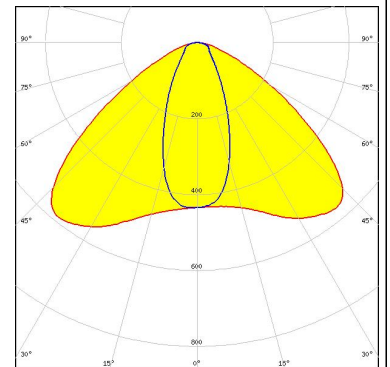

LED XP-G2
 FWHM 119.0 + 43.0°
 Efficiency 93 %
 Peak intensity 0.580 cd/lm
 Required components:

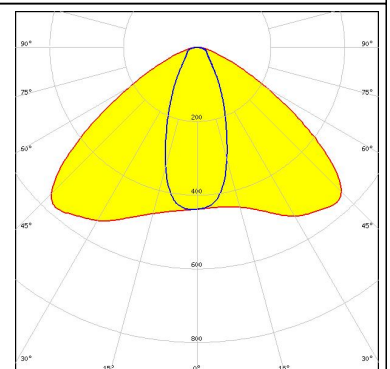


LED XP-G3
 FWHM 118.0 + 45.0°
 Efficiency 94 %
 Peak intensity 0.560 cd/lm
 Required components:

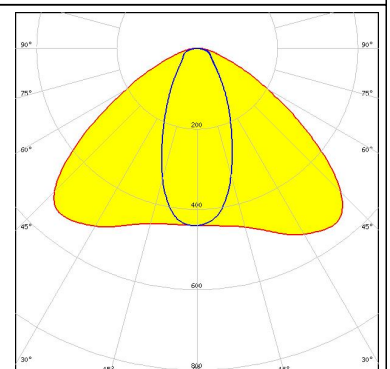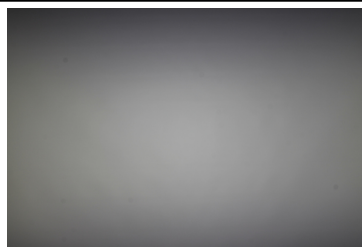


PHOTOMETRIC DATA (MEASURED):




LED XP-L HI
FWHM 117.0 + 40.0°
Efficiency 93 %
Peak intensity 0.590 cd/lm
Required components:

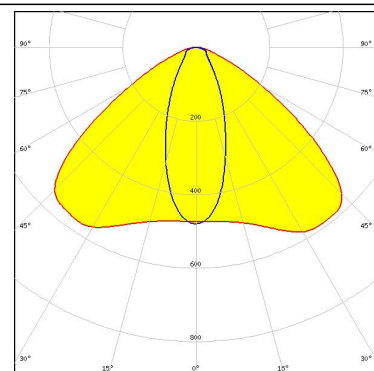



LED H35C1 (LEMWA33)
FWHM 119.0 + 44.0°
Efficiency 94 %
Peak intensity 0.560 cd/lm
Required components:

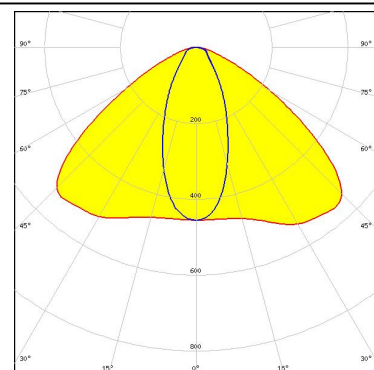

LED LUXEON TX
FWHM 117.0 + 43.0°
Efficiency 93 %
Peak intensity 0.590 cd/lm
Required components:

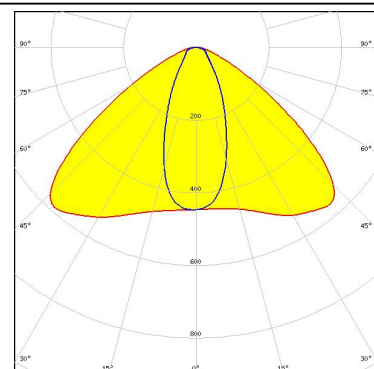


LED NVSW3x9A
FWHM 119.0 + 49.0°
Efficiency 94 %
Peak intensity 0.530 cd/lm
Required components:

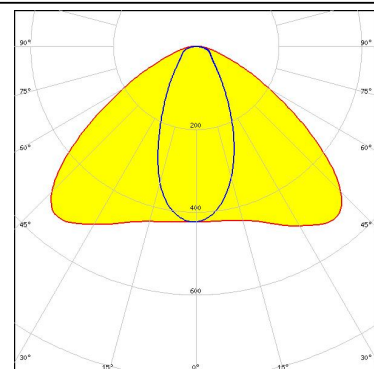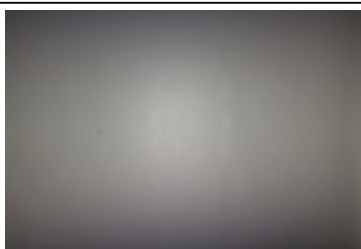



PHOTOMETRIC DATA (MEASURED):





LED NVSxE21A
FWHM 116.0 + 51.0°
Efficiency 93 %
Peak intensity 0.700 cd/lm
Required components:

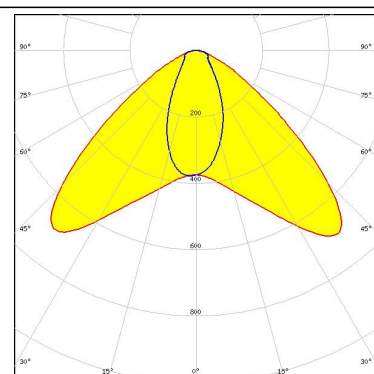


LED PrevaLED Brick DC 2x8
FWHM 118.0 + 43.0°
Efficiency 93 %
Peak intensity 0.580 cd/lm
Required components:

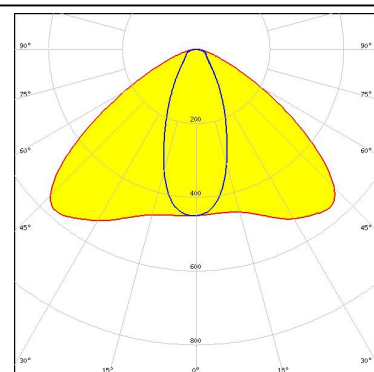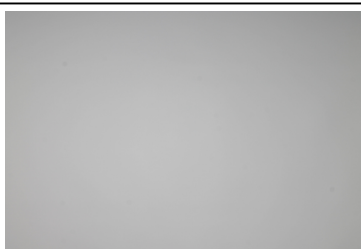

LED Oslon Square Gen3
FWHM 118.0 + 43.0°
Efficiency 93 %
Peak intensity 0.580 cd/lm
Required components:

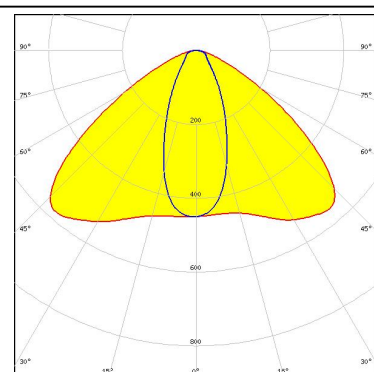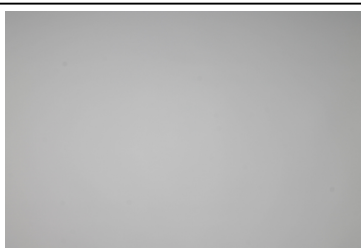


LED Oslon Square PC
FWHM 120.0 + 48.0°
Efficiency 94 %
Peak intensity 0.560 cd/lm
Required components:

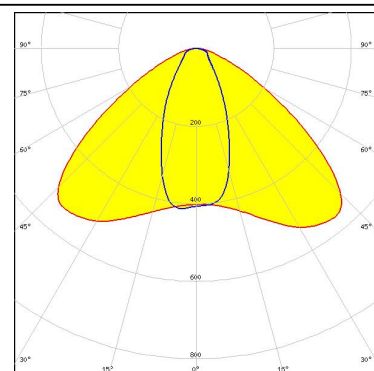

PHOTOMETRIC DATA (MEASURED):


PHILIPS

LED Fortimo FastFlex LED board 2x8 DA G4
FWHM 120.0 + 44.0°
Efficiency 94 %
Peak intensity 0.570 cd/lm
Required components:

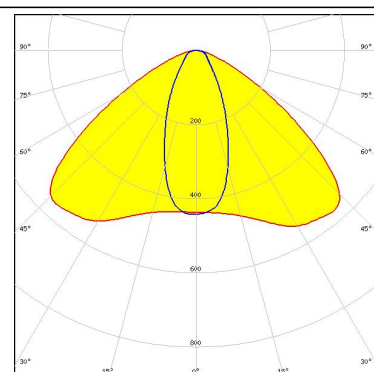


PHILIPS

LED Fortimo FastFlex LED board 2x8 DAX G4
FWHM 112.0 + 64.0°
Efficiency 94 %
Peak intensity 0.000 cd/lm
Required components:

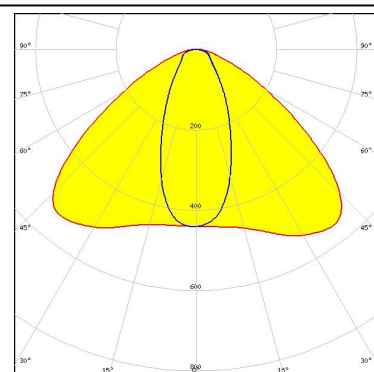


SAMSUNG

LED LH351B
FWHM 118.0 + 46.0°
Efficiency 93 %
Peak intensity 0.550 cd/lm
Required components:

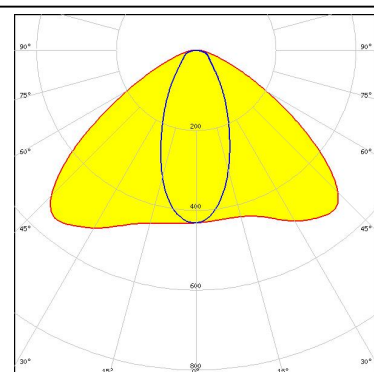

SAMSUNG


LED LH351Z
FWHM 118.0 + 47.0°
Efficiency 93 %
Peak intensity 0.560 cd/lm
Required components:

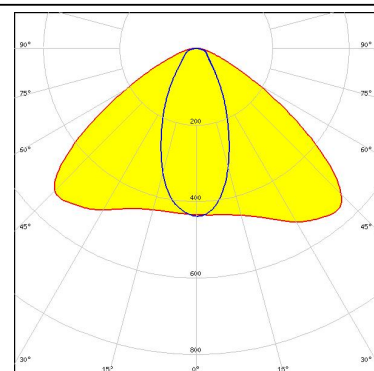


PHOTOMETRIC DATA (MEASURED):




LED Z8Y22
FWHM 116.0 + 55.0°
Efficiency 93 %
Peak intensity 0.570 cd/lm
Required components:

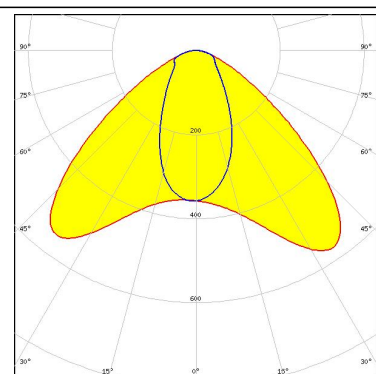


LED Z8Y22P
FWHM 118.0 + 50.0°
Efficiency 94 %
Peak intensity 0.550 cd/lm
Required components:

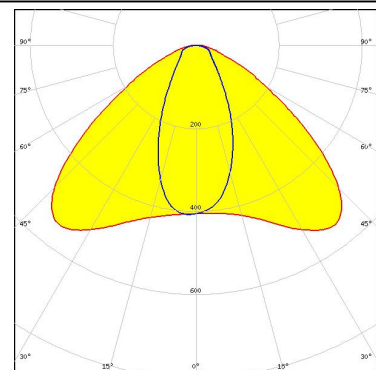

LED TL1L4
FWHM 116.0 + 45.0°
Efficiency 88 %
Peak intensity 0.570 cd/lm
Required components:

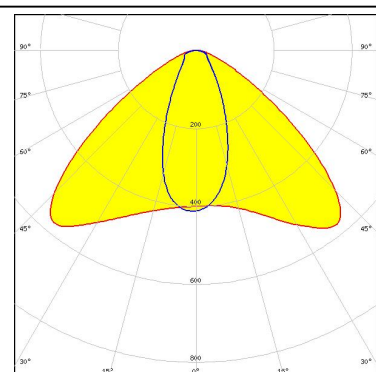


LED RLE G1 49x121mm 2000lm xxx EXC OTD
FWHM 121.0 + 48.0°
Efficiency 94 %
Peak intensity 0.580 cd/lm
Required components:

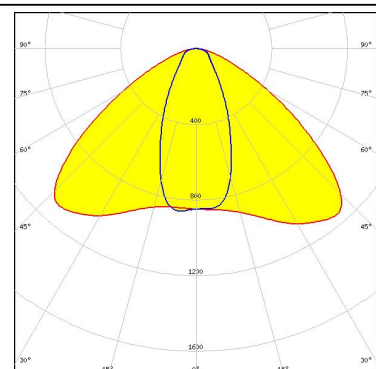

PHOTOMETRIC DATA (MEASURED):


TRIDONIC

LED RLE G1 49x133mm 2000lm xxx EXC OTD
 FWHM 121.0 + 48.0°
 Efficiency 94 %
 Peak intensity 0.580 cd/lm
 Required components:

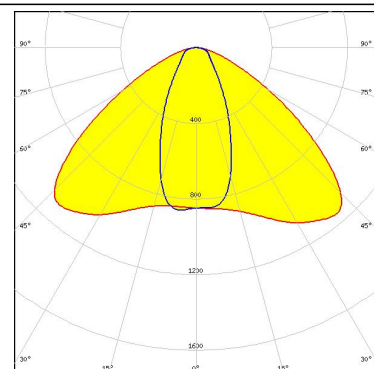


TRIDONIC

LED RLE G1 49x223mm 4000lm xxx EXC OTD
 FWHM 121.0 + 48.0°
 Efficiency 94 %
 Peak intensity 0.580 cd/lm
 Required components:

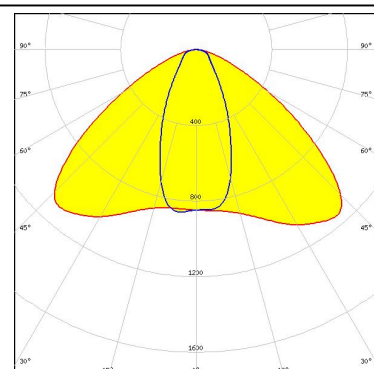

TRIDONIC


LED RLE G1 49x245mm 4000lm xxx EXC OTD
 FWHM 121.0 + 48.0°
 Efficiency 94 %
 Peak intensity 0.580 cd/lm
 Required components:

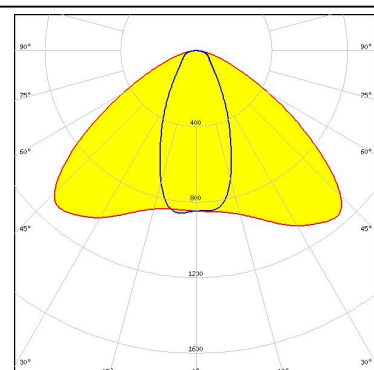

PHOTOMETRIC DATA (SIMULATED):

OSRAM
Opto Semiconductors

LED OSCONIQ P 3737 (3W version)
FWHM 111.0 + 45.0°
Efficiency 94 %
Peak intensity 0.610 cd/lm
Required components:

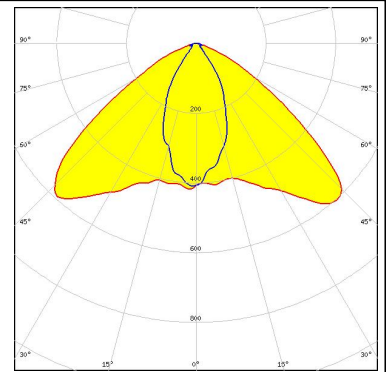

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)