

LED DRIVER SPECIFICATIONS

Customer's Part Number:

MOONS' Part Number:

4696350005012

Model:

MU100H120AQ_CP/AUX

P/N:

CUSTOMER'S APPROVAL STAMP

Please sign back after your approval. The specifications will come into force when we receive purchase order.

DWG	CHK	STANDARD	APPD.

Page 2 of 7

■ **Features**

- Input voltage: 90-305Vac
- Built-in active PFC function 0.98 Typ.
- Efficiency: up to 90% Typ.
- Built-in Lightning protection
- Three in one dimming operation mode(Isolated 0-10V Dimming / Clock Dimming(CLK)/PWM Dimming/ Dim to off)
- Auxiliary Power:12V/300mA max.
- Protection: OVP, SCP, OTP
- Full Power at 65%I_{max}~100%I_{max} (Constant Power)
- IP67 design for indoor or outdoor installations
- UL Type HL for use in a class I, Division 2 hazardous (Classified) location luminaires



Version: A0

■ **Specification**

Model		MU100H120AQ_CP/AUX P/N:
Input	Efficiency(120Vac)(Typ.)Note.1	87.0%
	Efficiency(230Vac)(Typ.)Note.1	90.0%
	Voltage Range (V)Note.2	90~305Vac, OR 125~ 300Vdc (Derating may be need under low inputs, Refer to 'Derating Curve')
	Voltage Rate (V)Note.2	100Vac-277Vac
	Frequency Range (Hz)	47~63
	Power Factor(Typ.)	>0.95 with 80%~100% full load,at 230Vac 0.90(Typ.) with 60%~100% full load,at 100Vac-277Vac/60Hz
	THD(Typ.)	<15% at 220VAC input 50Hz,80%~100% full load <20% at 100Vac-277Vac/60Hz input ,60%~100% full load
	AC Current(Typ.)	1.3A at 100VAC input, 0.6A at 230VAC
	Inrush Current(Max.)	65A at 230Vac input 25℃ Cold Start (time wide=500uS, measured at 50% I _{peak} ,Not applicable for the inrush current to Noise Filter for less than 0.2ms)
	Leakage Current(Max.)	0.75mA at 277VAC/60Hz input
Output	Voltage range (V) Note. 4	125-48
	Output Current Range(mA)	80-1200
	Rated Power (W)	100(max)
	Output Current Set Range	6.5%I _{o max} ~100%I _{o max}
	Constant Power Output Set Range	65%I _{o max} ~100%I _{o max}
	Ripple&Noise Current (Typ.)	10% max. ((PK-AV) /AV) with LED default mode and full load)
	Current Tolerance (I _{max})	±5%
	Line Regulation (I _{max})	±3%
	Load Regulation (I _{max})	±5%
	Turn on delay Time	<0.5s, at 120-277Vac
Dimming Control	12Vdc Output Voltage (Vdc)	10.8Vmin.~13.2Vmax.
	12Vdc Output Current(Vdc)	300mA max.
	0~10V/DM+ Voltage	Absolute maximum voltage -10Vmin~20Vmax
	0~10V/DM+ Short Current	280uA~450uA (DIM+)=0
	Dim-to-off (Typ.)	Default: input ≤1V, output current 10%; input ≥8.5V, output current 100%; input ≤0.5V, Dimming off; input ≥0.8V,Dimming on
	DIMMING FUNCTION	Default is 0-10V dimming mode.others dimming ways like PWM/CLK Dimming can set by software configuration
Protection	Over Voltage(V)	160VDC Typ.
	Short Circuit	No damage.The power supply shall be self-recovery when the fault is removed.
	Over Temperature	Protection type: Constant current limiting.
	AC Brownout	Decreases output current,returning to normal after over temperature is removed.
Environment	Operating Temp.	V _{in} on 75Vac typ.,V _{in} off 70Vac typ.
	Operating Humidity	-40~+70℃(Refer to 'Derating Curve')
	Tc	20~95%RH, non-condensing
	Storage Temp., Humidity	90℃ max
	Temp. Coefficient	-40~+85℃, 10~95%RH
	Vibration	0.03%/℃ (0~50℃)
Safety & EMC	Safety Standard	10-500Hz,5G 12min/cycle, period for 72min each along X、Y、Z axes
	Withstand Voltage	UL8750, UL1012, EN61347-1, EN61347-2-13 ,EN60598-1,EN62384
	Isolation Resistance	I/P-O/P:3.75KVAC I/P-FG:1.875KV O/P-FG:1.5KV I/P-DIM:3.75KVAC O/P-DIM:1.875KV
	EMC Emission	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500Vdc/25℃/70%RH
	EMC Immunity	EN55015/FCC Part 15 Class B, EN61000-3-2 Class C, EN61000-3-3
Others	MTBF	EN61000-4-2,3,4,5,6,8,11 (Surge L,N-FG 6KV,L-N 4KV) ,EN61547
	Lifetime	300,000 Hours,measured at full load,25℃ ambient temperature
	Dimension	50,000 Hours at Tc 75℃(Refer to"Life Time VS. Tcase (Ref.)")
	Weight	171.6*70*44 mm (LxWxH) 0.97kg(Typ.)



Note.1: Measured at full load and steady-state temperature in 25℃ ambient(Efficiency will be about 2% lower if measured immediately after startup); Note. 2: Derating may be needed under low input voltages , Please Refer to 'Derating Curve' ; Note. 3: All parameters NOT specially mentioned are measured at 230VAC input , rated load and 25℃ of ambient temperature ; Note. 4: refer to V/I curve

subject to change without notice


Page 3 of 7

■ Operating Curve


Derating Curve

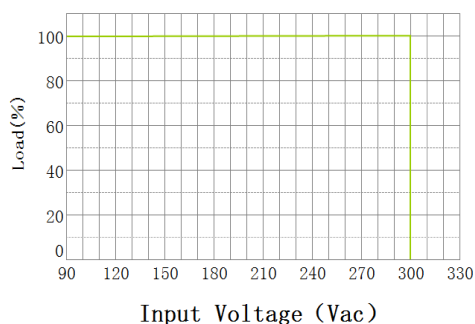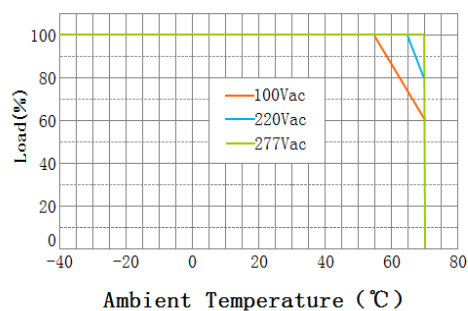


V/I Curve

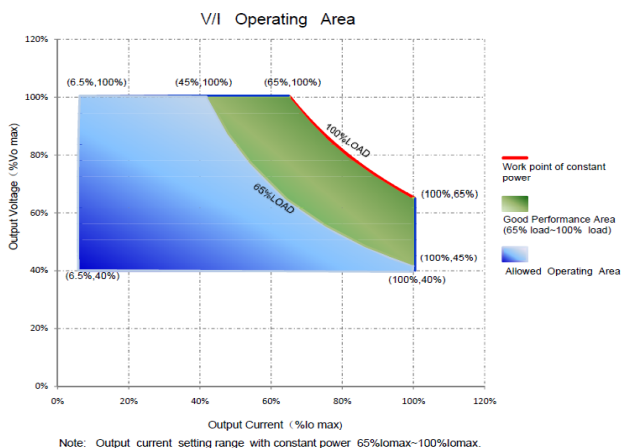


Lifetime vs. Case Temperature

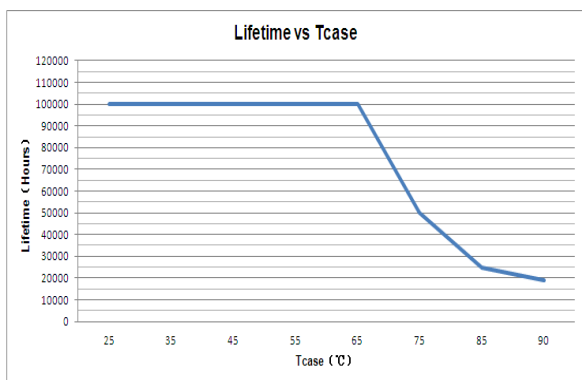


Power Factor Curve

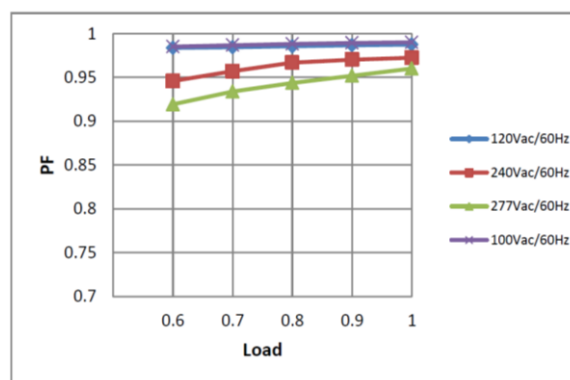

Efficiency VS. Load Curve (typ.)

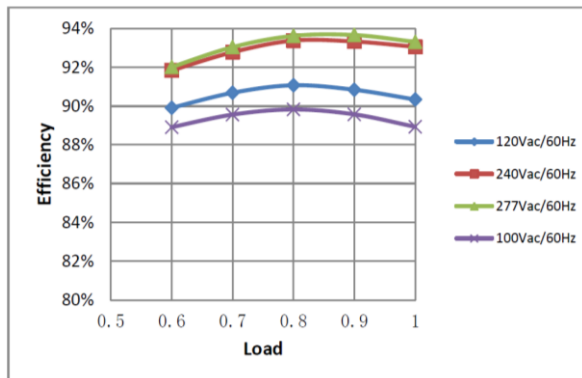

THD Curve

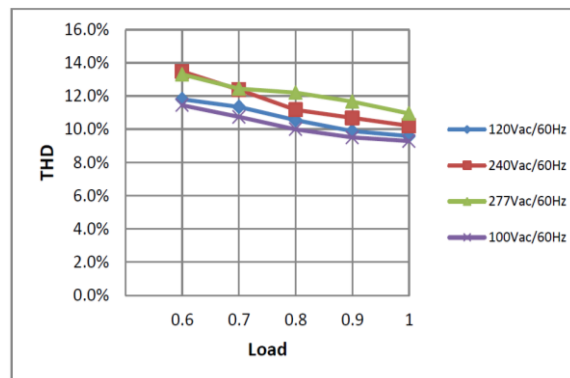


subject to change without notice

Page 4 of 7

■ Instruction

1.Field Programmable Topology

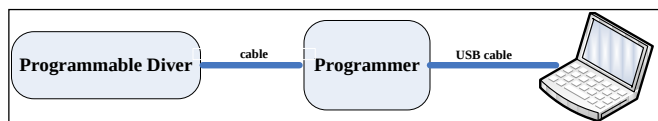

The programmable driver can be programmed by using special PC software and the programmer module.

2.Dimming Interface Description

Pin description

Pin	Name	Value	Description
1	Vaux 12V	10.8V-13.2V	Passive dimmers power supply
2	Dim+/Program	0-10V	Dimming/Programming input
3	Dim-	0V	DC Ground

PROGRAMMING INTERFACE

- 1 Vaux 12V / YE(黄色)
- 2 Dim+ / PU(紫色)
- 3 Dim- / GR(灰色)

3.Dimming Software Function Instruction

■ Adjustable Output Current(AOC)

Adjustable Output Current(AOC)

Module Current mA

Max Current mA Power

Users can set the rated current between 7%*Max Current and 100%*Max Current.

■ Adjustable Startup Time(AST)

Adjustable Startup Time(AST)

Start Fadeup Time s

Set driver's "Start Fade up Time". It means how much time the driver costs to achieve the "Module Current" that the user set. The valid value is 0s, 1s, 2s, 5s, 10s, 20s, 40s.

■ Fade Time(FT)


Fade Time(FT)

Fadeup Time s

Set driver's "Fade up Time". This function is available in the Smart Midnight ClockDIM and Fixed ClockDIM mode; It means how much time the driver costs to achieve another dimming level from previous dimming level. The valid value is 0s, 1s, 2s, 5s, 10s, 20s, 40s.


■ 1-10V

Allow users to set the max and min output current and corresponding output voltage to clarify the 1-10V dimming curve. Input a 0-10V signal from 2nd pin of the dimming interface. Default: input $\leq 1V$, output current 10%; input $\geq 8.5V$, output current 100%; input $\leq 0.5V$, Dimming off; input $\geq 0.8V$, Dimming on.

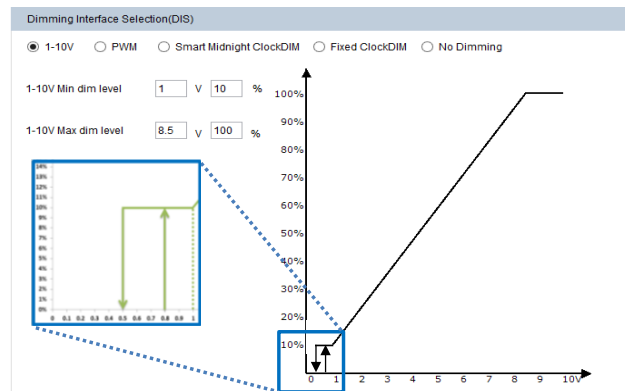


■ PWM

Input a PWM signal from the 2nd pin(Dim+/Program) of the dimming interface to change the output current. User can set "Positive Logic" or "Negative Logic" of the PWM signal. PWM duty circle: 10%~99%(it has both positive and negative logics), frequency: 500Hz~5kHz, 3V~10V is high, 0.3V~0.8V is low. Default: PWM $\leq 5\%$, Dimming off; PWM $\geq 8\%$, Dimming on.

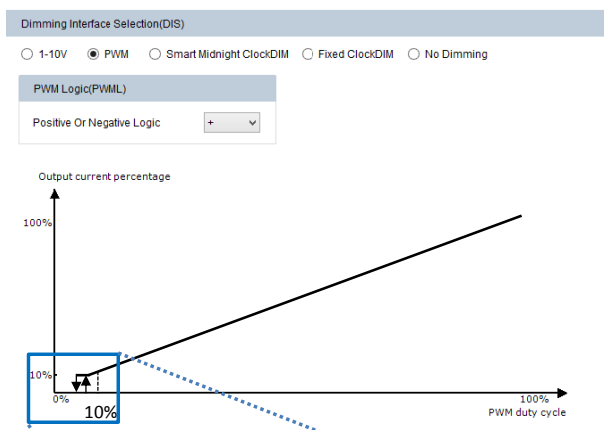


■ Instruction

■ Smart Midnight ClockDIM

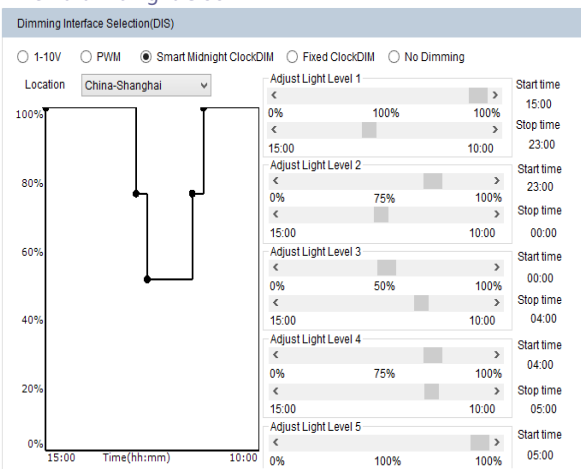


Smart Midnight ClockDIM allows dimming to predefined light levels based on the nightly operating time. With flexibility in setting time and light levels, the user can configure the driver for specific locations and application needs. Using Smart Midnight ClockDIM, it is possible to set up to 5 dim levels and time intervals. The driver does not have a real time clock. Instead it runs a virtual clock, determined by the length of nightly operating hours. After 3 ON-OFF cycles, the driver will calculate the virtual clock time. A valid ON-time is defined as a period during which the driver operates continuously for ≥ 4 hours to ≤ 24 hours. For example, if the requirement in summer is: 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75% (other time 100% or Off). The driver should be powered on for 7h, so it can calculate the virtual clock time as 22:00. Then we can set the dimming plan: 22:00-23:00: 100%, 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75%. From summer to winter, the valid ON-time changes day by day. The driver should be powered on for 17h in winter, and it also can calculate the virtual clock time as 17:00. Then the dimming plan is 17:00-23:00: 100%, 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75%, 05:00-10:00: 100%. From the above, if we set the dimming plan as shown in the picture, after repeating the driver ON-time for 3 consecutive days, the dimming plan takes effect from the 4th day onwards. Each day the driver powered on, it has a different start time according to the virtual clock time. So the driver can satisfy different requirements for different seasons.

■ Constant Light Output(CLO)

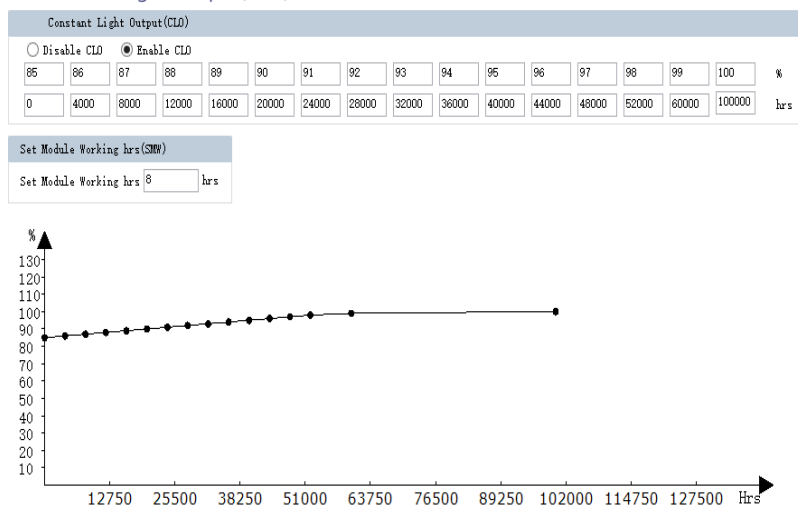


■ Fixed ClockDIM

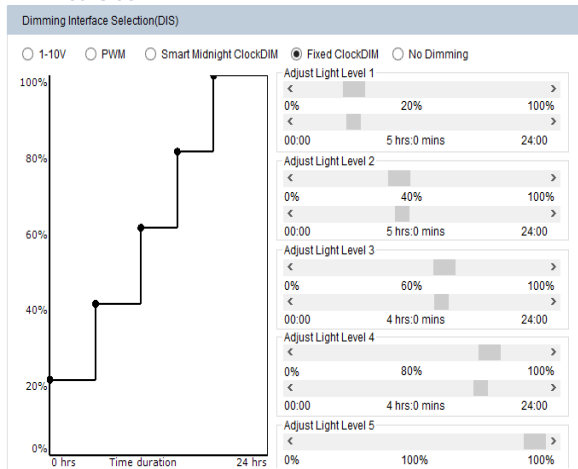


Allow users to separate 24hrs into 5 sections and corresponding output current.

■ No Dimming



The driver will be in constant output mode.

■ Set Module Working hrs(SMW)



User can check how much time the driver works through this function.


Traditional light sources suffer from depreciation in light output over time. This applies to LED light sources as well. The CLO feature enables LED solutions to deliver constant lumen output through the life of the light engine. Based on the type of LEDs used, heat sinking and driver current, it is possible to estimate the depreciation of light output for specific LEDs and this information can be entered into the driver. The driver counts the number of light source working hours and will increase output current based on this input to enable CLO.

When the CLO feature is enabled, the driver nominal output current will be defined by the CLO percentage as shown by the equation below: Driver target nominal output current = CLO percentage * AOC. For example, in the CLO profile shown in Figure, between 52,000-60,000 working hours, the CLO percentage is set at 98%. Assuming the nominal AOC is set to 500mA, the driver output current with CLO enabled will be $0.98 \times 500 = 490$ mA.


The CLO percentage can be set to a value between 85%-100%, in increments of 1%. The LED module working hours can be set at any value between (0-100,000 hours).

■ Mechanical Specification

Dimensions(Unit:mm)

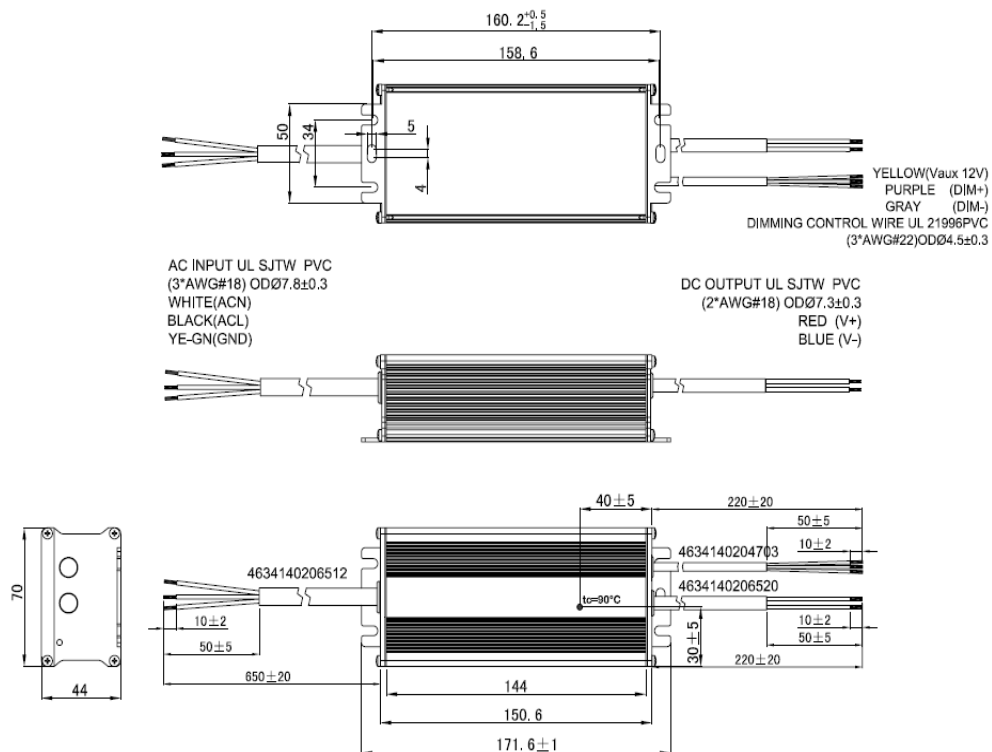

Nameplate:

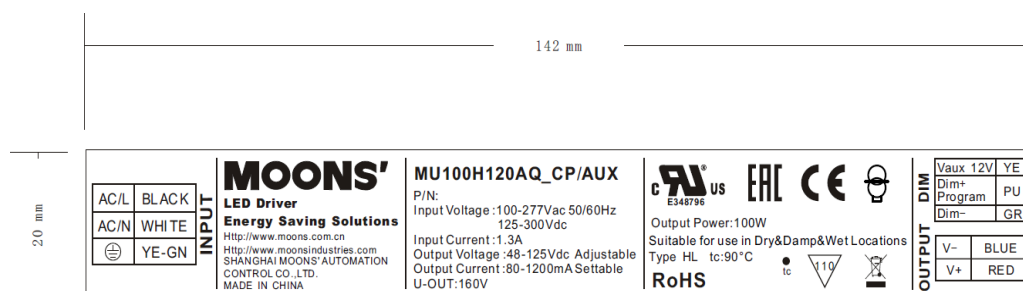

RoHS Compliance:

Our products comply with the European Directive 2011/65/EC, calling for the elimination of lead and other hazardous substances from electronic products.

subject to change without notice

Page 7 of 7