



PXC SERIES LED DRIVER

DL-150H-A/P-PXC SPEC V1.1

Features

- Class I structure
- Input voltage range:100~277VAC

Rated voltage:180-277 V ~ 50/60 Hz 150W max.
 Input voltage:100~150V ~ 50/60 Hz 75W max.
- Efficiency :95%(Typ.)
- Constant power drive and constant current output control mode
- Metal shell structure, protection grade: IP65
- Surge level: differential mode :6kV, common mode :10kV
- With residual light when turn-off.
- Available version:

P version: 1.default dimming method of Isolated 3 in 1 dimmer
 A version: Output current is dimmed by external potentiometer
- Lifetime design: 5 years



Applications

Road lighting、Industrial lighting、Venue lighting

Floodlight lighting、Landscape lighting



Model list

Model NO.	Input voltage	Output power	Output voltage	The default current	Eff.	T.H.D	PF
DL-150H-260P-PXC	200-277V	150W	180-260Vdc	0.7A	≥95%	≤10%	≥0.95
DL-150H-260A-PXC	50/60Hz						

Note :

1. Test conditions : Ta=25℃, 230Vac input, after 30 minutes operation with full load ;

2. When the input is less than 165±15Vac,the output power gradually decreases to 75W±20%. And when the input is above 180VAC, the rated power of 150W is available.

Please refer to “THE OUTPUT POWER VS INPUT VOLTAGE” curve chart for details.

Input characteristics

Parameter	Min	Typ.	Max	remark
Rated input voltage	200Vac	230Vac	277Vac	
Input voltage range	100Vac		305Vac	The output decrease to about 50% when input is below 165±15VAC
Rated frequency	47Hz	50/60Hz	63Hz	
Power factor	-	0.95	-	@230Vac input ,with full load
	-	0.9	-	@277Vac input ,with full load
T.H.D.	-	-	10%	@230Vac input ,with full load
	-	-	20%	@200-277Vac input ,with 75%-100%
Input current	-	-	0.9A	@180Vac input ,with full load
Inrush current	-	-	100A	230Vac, cold start (25℃)

Output characteristics

Parameter	Min	Typ.	Max	remark
Rated current DL-150H-260P-PXC DL-150H-260A-PXC	-	0.58A	-	With loading 260VDC
Output current range DL-150H-260P-PXC DL-150H-260A-PXC	0.38A	-	0.75A	
Output voltage range DL-150H-260P-PXC DL-150H-260A-PXC	180V	-	260V	
Constant power output voltage range	200V	-	260V	Maximum output power 150W
Constant current output voltage range	180V	-	260V	Maximum output current 0.75A
No-load voltage DL-150H-260P-PXC DL-150H-260A-PXC	-	-	350V	-

Output characteristics

Parameter	Min	Typ.	Max	remark
Efficiency@200Vac DL-150H-260P-PXC DL-150H-260A-PXC	-	94.3%	-	100% load @200Vac Output current 0.58A, 150W
Efficiency@230Vac DL-150H-260P-PXC DL-150H-260A-PXC	-	95%	-	100% load @230Vac Output current 0.58A, 150W
Output ripple current	-	-	5%	with100% load, 20MHZ band Width, and percent of ripple current = $(I_{max}-I_{min}) / (I_{max}+I_{min}) * 100\%$
Accuracy of output current	-5%	-	+5%	full load
Line regulation	-5%	-	+5%	full load
Load regulation	-5%	-	+5%	full load
Starting time		-	1000ms	Full load @230Vac

Note: The output current range is limited by the input and output voltage, please refer to "I-V WORKING AREA" for details.

Dimming characteristics

Dimming function		Min	Typ.	Max	Instructions
1-10V Dimming (Optional)	Safe operation voltage range	0V	-	12V	
	Rated operation voltage range	0V	-	10V	
	Dimming output range	0%	-	100%	
PWM Dimming (Optional)	PWM high level	9.5V	-	10.5V	-
	PWM low level	0V	-	0.3V	-
	PWM frequency band	300Hz	-	2000Hz	-
	PWM duty cycle	0%	-	99%	Output full power at 99% duty cycle
Resistor Dimming (Optional)	Rated external resistance value	0KΩ	-	100KΩ	Bigger resistor won't increase the output.
	Dimming output range	0%	-	100%	
Multiple time-controlled dimming (Optional)	MCU control	set dimming function Segment by segment through program			three operation modes for selection.
	Timer control	The default is six segments, Can be customized. 24H a cycle.			With extra timer controller outside.

Note:

1. Output current of dimming port: 100uA (typical value)
2. The maximum voltage applied to the dimming port is suggested below 12V, but it also is protected against wrong voltage up to 230VAC or 300VDC. Please don't keep the wrong voltage apply to the port for a long time. Otherwise, it is possible to be damaged.
3. the dimming default setting is 3-in-1 positive logic dimming (can be set to timing dimming through programming software, 0-5V or other voltage dimming, etc.).

Protection

Protection	description
Input under-voltage protection	When the input voltage is less than 165Vac±15Vac, the output power decreases to 50%±20%.
Output overload protection	Protection mode:hiccup mode,recovers automatically after fault condition is removed.
Output short circuit protection	Hiccup mode:recovers automatically after fault condition is removed
Over temperature protection	Self-recovery type: when the housing temperature is greater than 95±5℃, the output power decreases to 75W±20%.
Output over-voltage protection	Protection mode: Hiccup mode or clamped in output highest voltage , the product is not damaged, LED driver works normally after fault condition is removed.

Note:

1. Unless otherwise specified, all specifications and parameters shall be measured at the conditions of 380Vac (50Hz), rated load and 25℃ of ambient temperature;

Environmental


Environmental categories	Parameter
Working temperature	-40 ~ +55℃@200-277Vac (refer to "Life Curve ")
Max.Case Temp.	-40 ~ 90℃
Working humidity	20 ~ 95% RH, non condensing
Storage temperature、 humidity	-40~+85℃, 10 ~ 95% RH
Resistant to vibration	10 ~ 500Hz, 5G 12 min/cycle, X, Y, Z axis 72 min each
MTBF	50Khrs min. MIL-HDBK-217F (Ta=25℃)
Lifetime	70000 hours @Tcase≤75℃, 230Vac, 100% Load, Please refer to "Tcase VS Lifetime" curve

Safety and EMC

Safety categories	Standard
Safety	EN61347-1、EN61347-2-13、IEC61347-1、IEC61347-2-13、AS/NZS61347.1、AS61347.2.13、EN 62384、UL8750;
EMC	EN IEC 55015、EN IEC 61000-3-2 、GB/T 17743、GB17625.1、 EN 61000-3-3、EN 61547
Surge protection	Differential mode L-N ±6KV (2 ohm) ,common mode L, N-PE± 10 KV (12 ohm); Refer to IEC61000-4-5 2014 Criterion B
High-pot test	I/P-PE :1.5KVac O/P-PE : 1.5KVac I/P-DIM:1.5KVac O/P-DIM:1.5KVac
Insulation impedance	I/P-PE:100MΩ / 500VDC/ 500VDC / 25℃/ 70% RH
Leakage current	<0.7mA@277Vac


- Note:**
- Attention! As a component of the whole, the EMC performance of the final product is not only decided by the driver, even if the driver is well-designed and fulfil all the required compliance. The final equipment manufacturers must re-qualify EMC Directive on the complete product.
 - No load is not recommended because the power supply is in OVP protected restart mode when unloaded.

I-V Working area

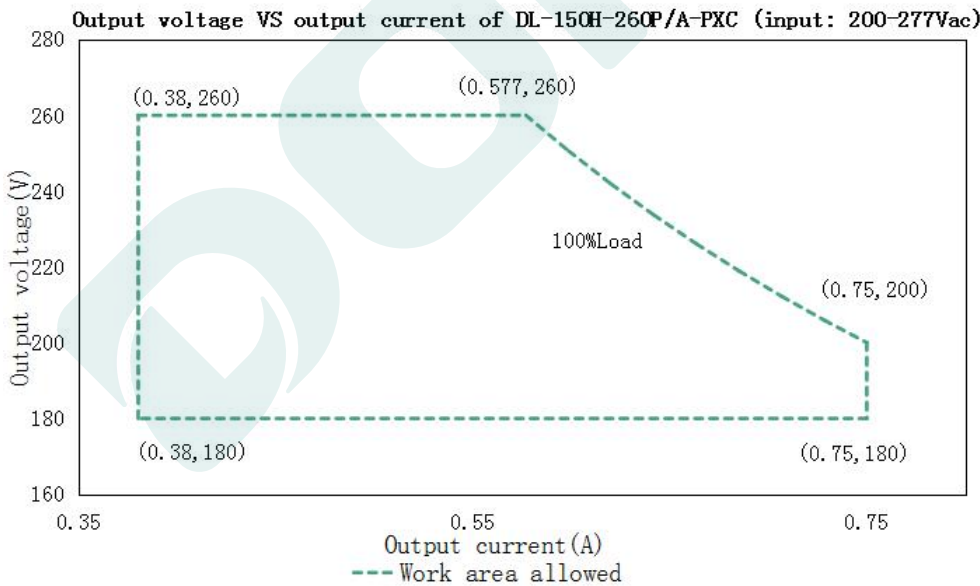


Load	Output								
Load working Voltage	180V	190V	200V	210V	220V	230V	240V	250V	260V
Io_MAX	0.75A	0.75A	0.75A	0.71A	0.68A	0.65A	0.63A	0.6A	0.58A
Po_MAX	135W	142.5W	150W	150W	150W	150W	150W	150W	150W


Eff. VS Output voltage(DL-150H-260P/A-PXC)

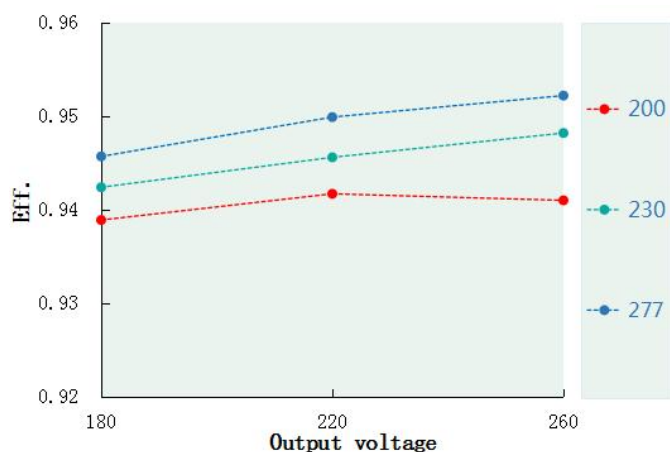


Power factor VS Input voltage(DL-150H-260P/A-PXC)

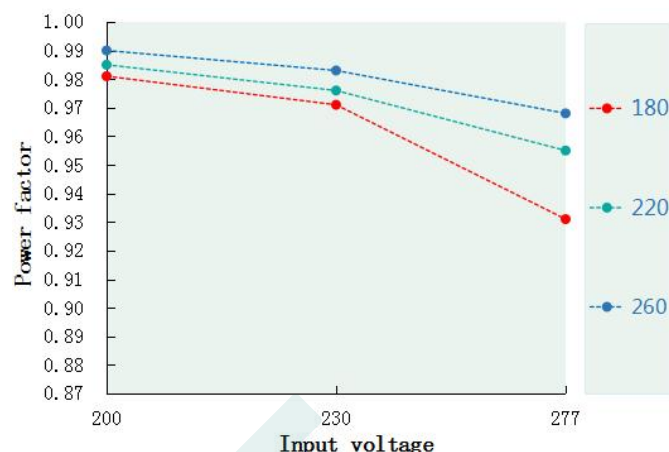


T.H.D. VS Output voltage(DL-150H-260P/A-PXC)

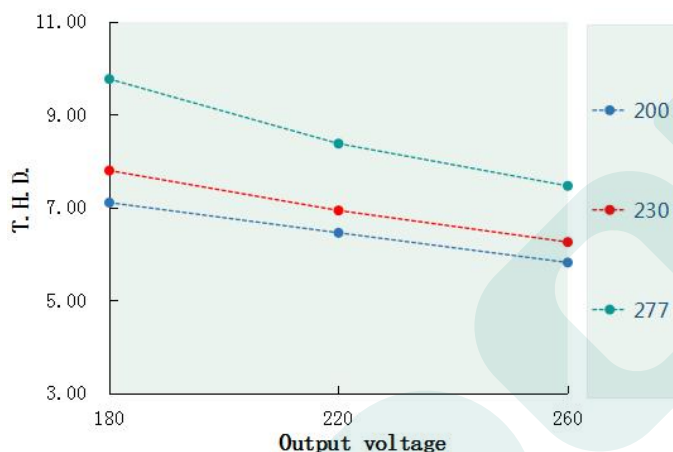


Tcase VS Lifetime(DL-150H-260P/A-PXC)

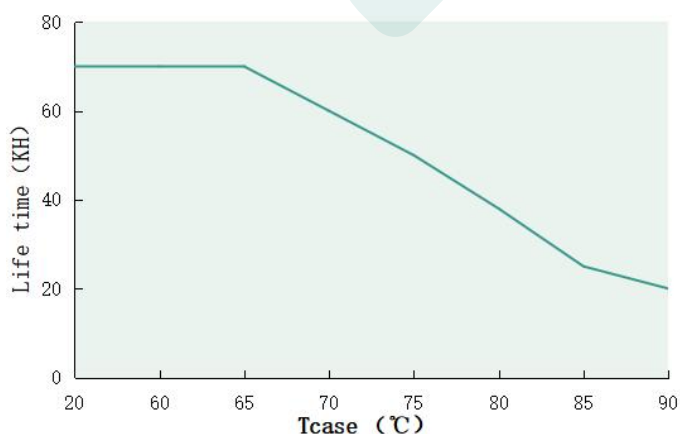

Output power VS Tcase (DL-150H-260P/A-PXC)

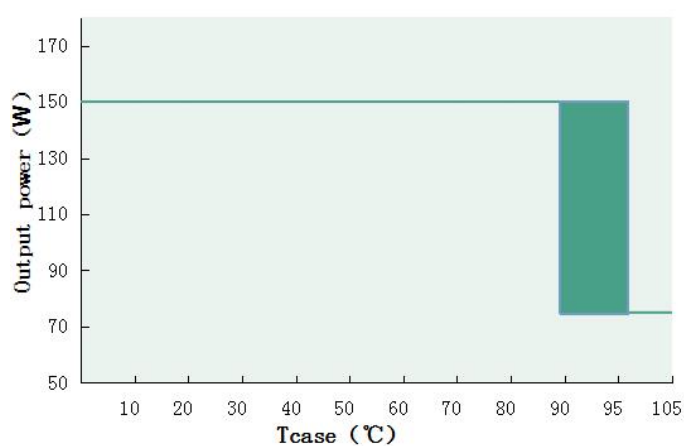


Inrush Current(DL-150H-260P/A-PXC)

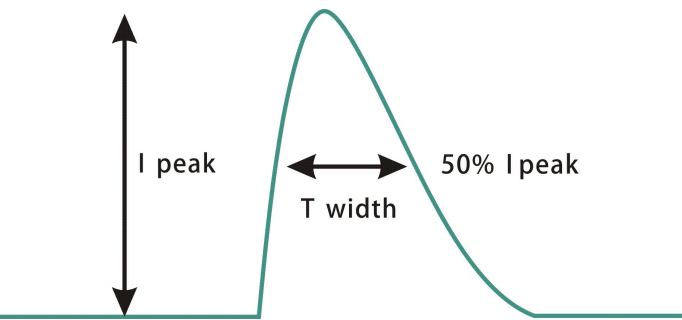

Input voltage	Peak current	T(@50% Peak current)
100Vac	54A	175us
200Vac	56A	180us
230Vac	58A	190us
277Vac	66A	210us

Output power VS Input voltage

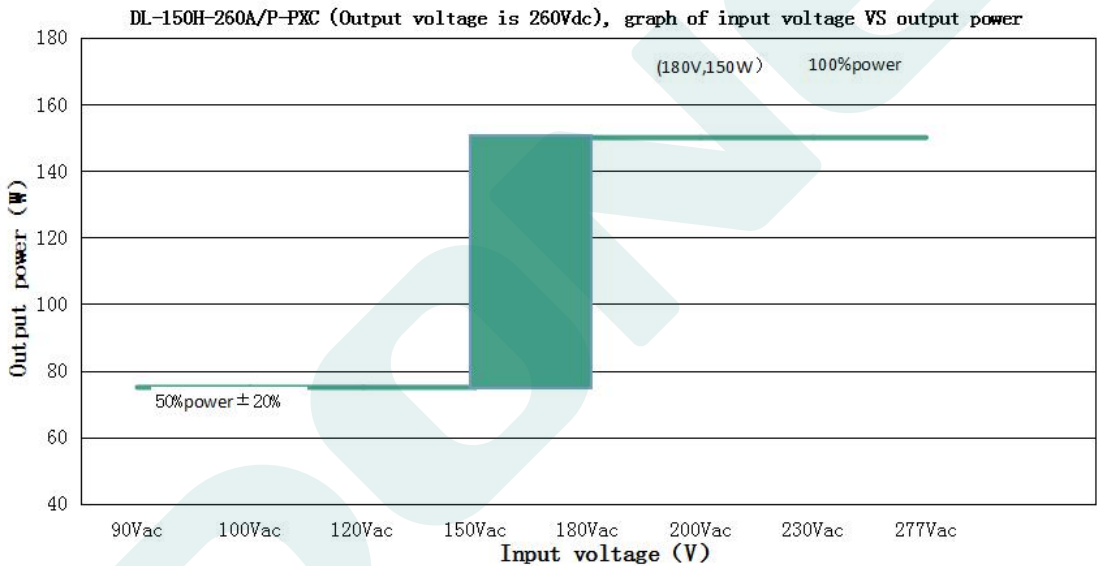

DL-150H-260P/A-PXC (For output 260Vdc, the rated output current & power under different input voltage)

Input Voltage	100Vac	120Vac	130Vac	140Vac	150Vac	180Vac	200Vac	230Vac	277Vac
I _{out}	0.29A	0.29A	0.29A	0.29A	0.29A	0.58A	0.58A	0.58A	0.58A
P _{out}	75W	75W	75W	75W	75W	150W	50W	150W	150W

Note: When the input voltage is below 165±15Vac,the output power decreases to 75W±20%.





Dimming function

※ Three-in-one dimming function (P version only)

A. connect a resistor 0-100K or 0-10V DC voltage or 10V PWM signal between DIM+ and DIM- to adjust the output current.



B. output current of dimming port: 108uA (typical value).

◎ With an applied voltage of 0-10V:

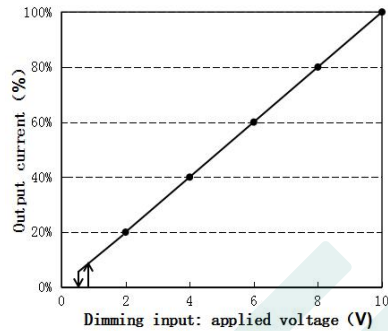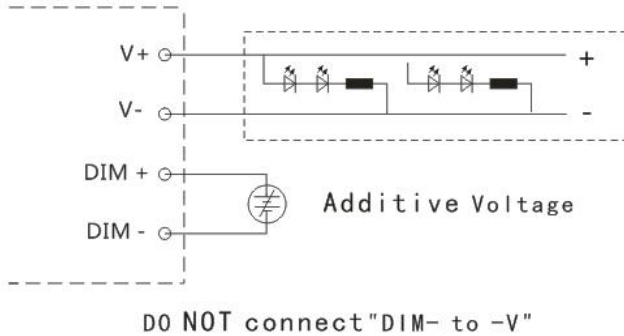



Positive logic dimming curve

◎ Applying additive 10V PWM signal (Frequency range: 300Hz-2K Hz) :

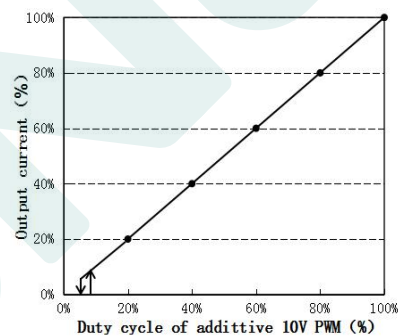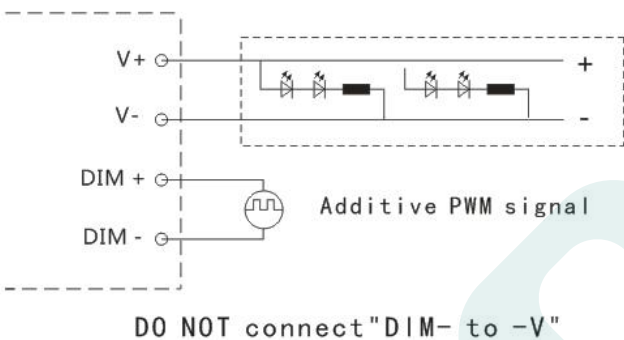

Positive logic dimming curve

◎ With an additional 0-100K resistor:

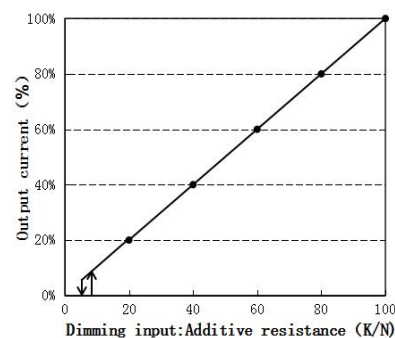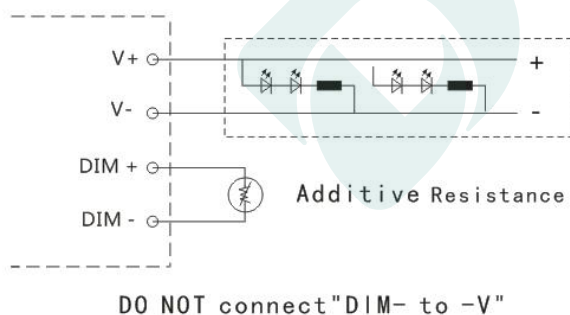

Positive logic dimming curve

Remark:


1. Operation way, of positive logic ,can be selected by program.
2. Dim -off is only available for positive logic dimming .Other requirements need to contact with the technician for help.

Mechanical specification


Size (mm) L143mm*W49mm*H31mm

Dimension drawing

DL-150H-260P-PXC

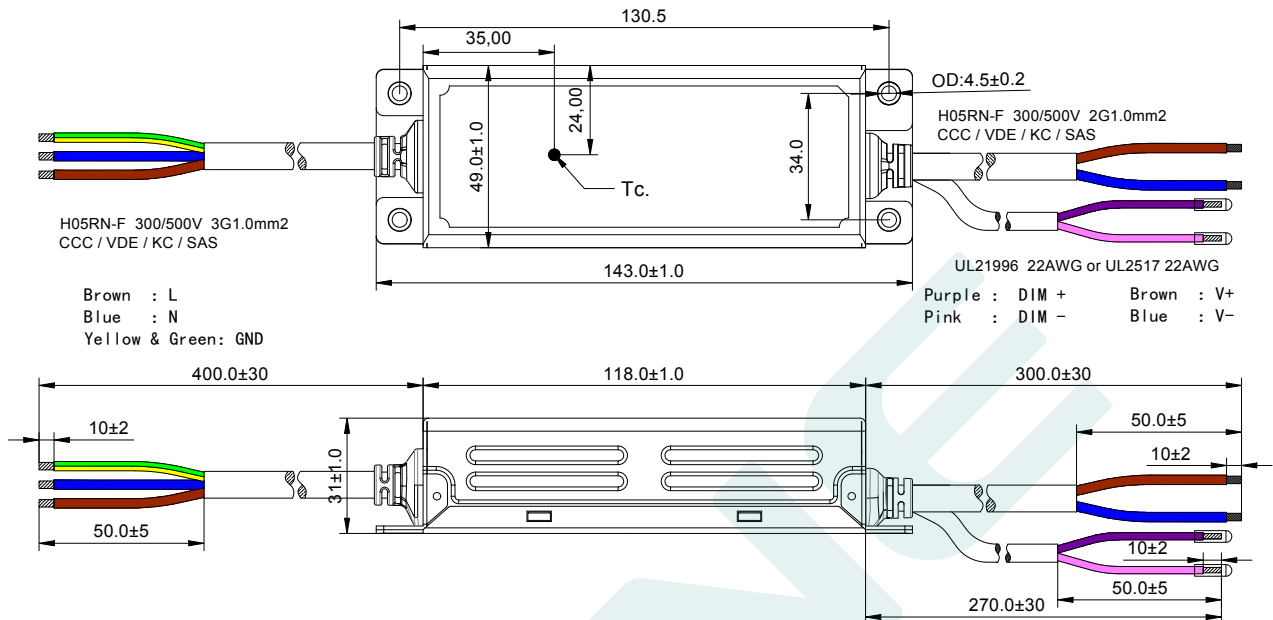

DL-150H-260A-PXC

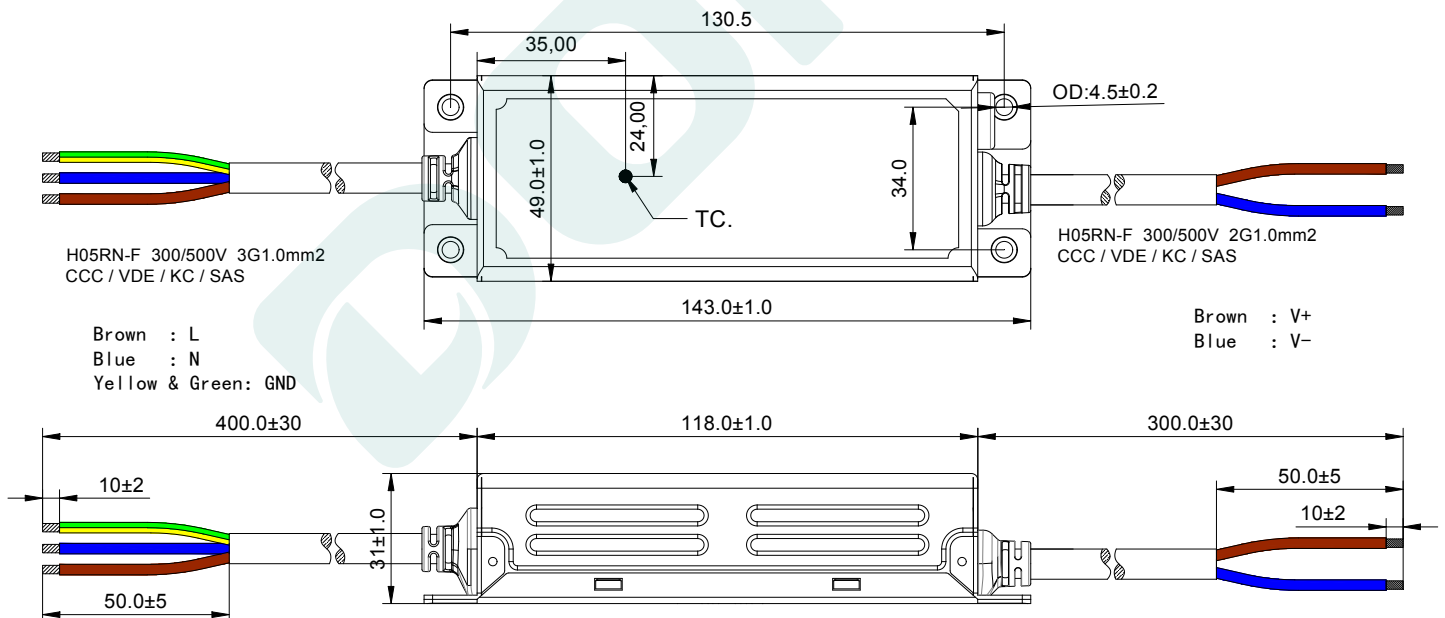


Weight

Weight 450 g

Packaging

Packaging (mm) L475*W350*H160

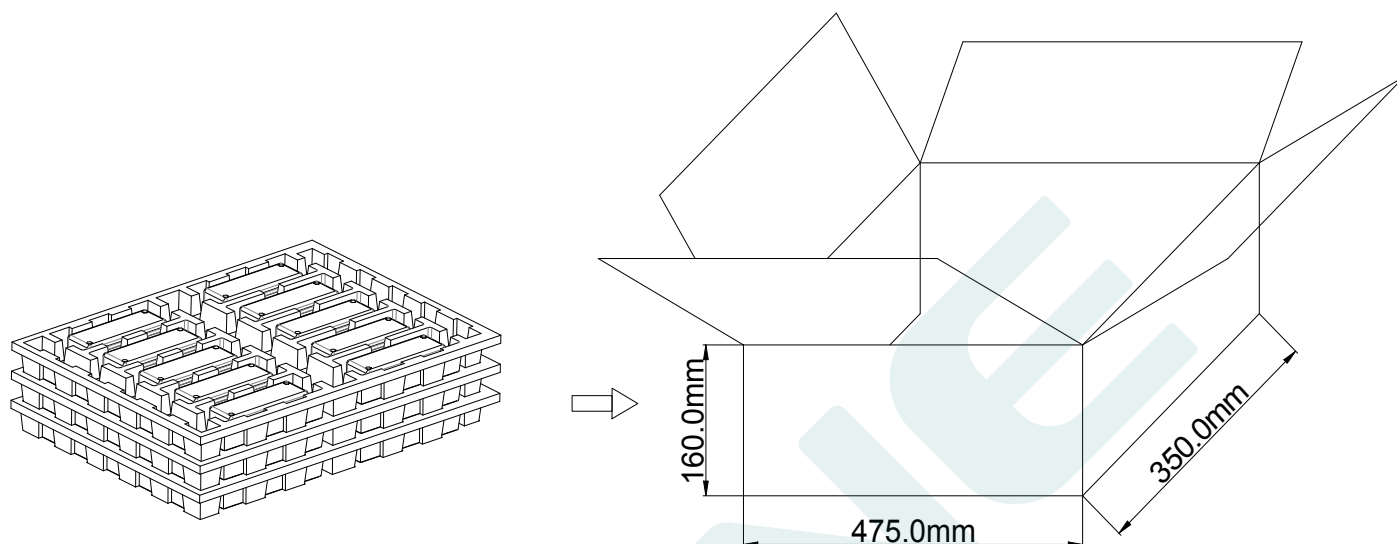

Note: One Carton 3 layers and 10 pcs each layer, total 30pcs/carton.

Note:

1. According to the qualified certificate of the LED DRIVER, that with English label is for sale in Europe, America and India.
2. That with Chinese label are used for Chinese market.

Version

DATE	DESCRIPTION	REV.	CHECK
2024.05.08	Initial version.	V1.0	
2024.06.19	According to ENEC certification requirements, the input current should be controlled within the deviation of $\pm 10\%$. Modify the input current on page 3	V1.1	

MANUFACTRUER		
EDIT	CHECK	APPROVE