

DETAILS

Product Number	CS14597_HB-IP-2X6-O
Family	HighBay
Type	Assembly
Color	clear
Diameter	173x71,4 mm
Height	12,2 mm
Style	rectang
Optic Material	PMMA
Holder Material	
Fastening	
Status	production ready
ROHS Compliant	Yes
Date Updated	7/07/2017



OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Efficiency	cd/lm	Connector
XM-L	36+110 deg	Asymmetric	91 %	0.610	-
XP-G2	32+116 deg	Asymmetric	92 %	0.660	-
XP-G	31+117 deg	Asymmetric	91 %	0.650	-
XT-E	31+119 deg	Asymmetric	92 %	0.630	-
XM-L2	36+108 deg	Asymmetric	91 %	0.630	-
XP-L	36+115 deg	Asymmetric	91 %	0.600	-
XP-G3	33+119 deg	Asymmetric	92 %	0.630	-
XP-L2	118+38 deg	Asymmetric	92 %	0.560	-
H35C1 (LEMWA33)	sim: 24+99	Asymmetric	sim: 94 %	sim: 1.200	-
LUXEON T	32+115 deg	Asymmetric	91 %	0.630	-
LUXEON R	30+109 deg	Asymmetric	91 %	0.680	-
LUXEON Rebel	28+107 deg	Asymmetric	91 %	0.730	-
LUXEON Rebel ES	30+110 deg	Asymmetric	91 %	0.690	-
LUXEON Z ES	25+108 deg	Asymmetric	90 %	0.790	-
LUXEON TX	30+111 deg	Asymmetric	90 %	0.690	-
LUXEON XR-TX (L2T0-xyy012M)	30+115 deg	Asymmetric	91 %	0.670	-
LUXEON 5050	sim: 34+96	Asymmetric	sim: 93 %	sim: 0.940	-
LUXEON V	112+34 deg	Asymmetric	87 %	0.600	-
NVSxx19B/NVSxx19C	31+116 deg	Asymmetric	90 %	0.630	-
NVSxE21A	26+116 deg	Asymmetric	91 %	0.700	-
NVSW3x9A	sim: 103+25	Asymmetric	sim: 91 %	sim: 1.000	-
NVSxx19B/NVSxx19C	114+32 deg	Asymmetric	91 %	0.670	-
Oslon Square PC	30+111 deg	Asymmetric	92 %	0.690	-
Oslon Square EC	30+108 deg	Asymmetric	91 %	0.720	-
Duris S8	111+38 deg	Asymmetric	92 %	0.920	-




PRODUCT DATASHEET

HighBay series

last update 7/7/2017


OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Effi- ciency	cd/lm	Connector
Oslon Square Gen3	110+29 deg	Asymmetric	92 %	0.720	-
Oslon SSL 80	26+92 deg	Asymmetric	93 %	0.890	-
OSCONIQ P 3737 (3W version)	sim: 27+100	Asymmetric	sim: 94 %	sim: 1.020	-
Fortimo FastFlex LED board 2x6 DP G4	32+116 deg	Asymmetric	92 %	0.660	-
Fortimo FastFlex LED board 2x6 DPX G433	43+119 deg	Asymmetric	92 %	0.630	-
LH351Z	29+104 deg	Asymmetric	91 %	0.770	-
Z5M1/Z5M2	29+105 deg	Asymmetric	90 %	0.730	-
Z8Y22P	122+32 deg	Asymmetric	92 %	0.630	-
SMJQ-D36W12Mx	30+119 deg	Asymmetric	91 %	0.640	-
SMJQ-D36W12Px	121+32 deg	Asymmetric	92 %	0.610	-
Z8Y22	30+119 deg	Asymmetric	91 %	0.640	-
TL1L4	29+107 deg	Asymmetric	87 %	0.690	-

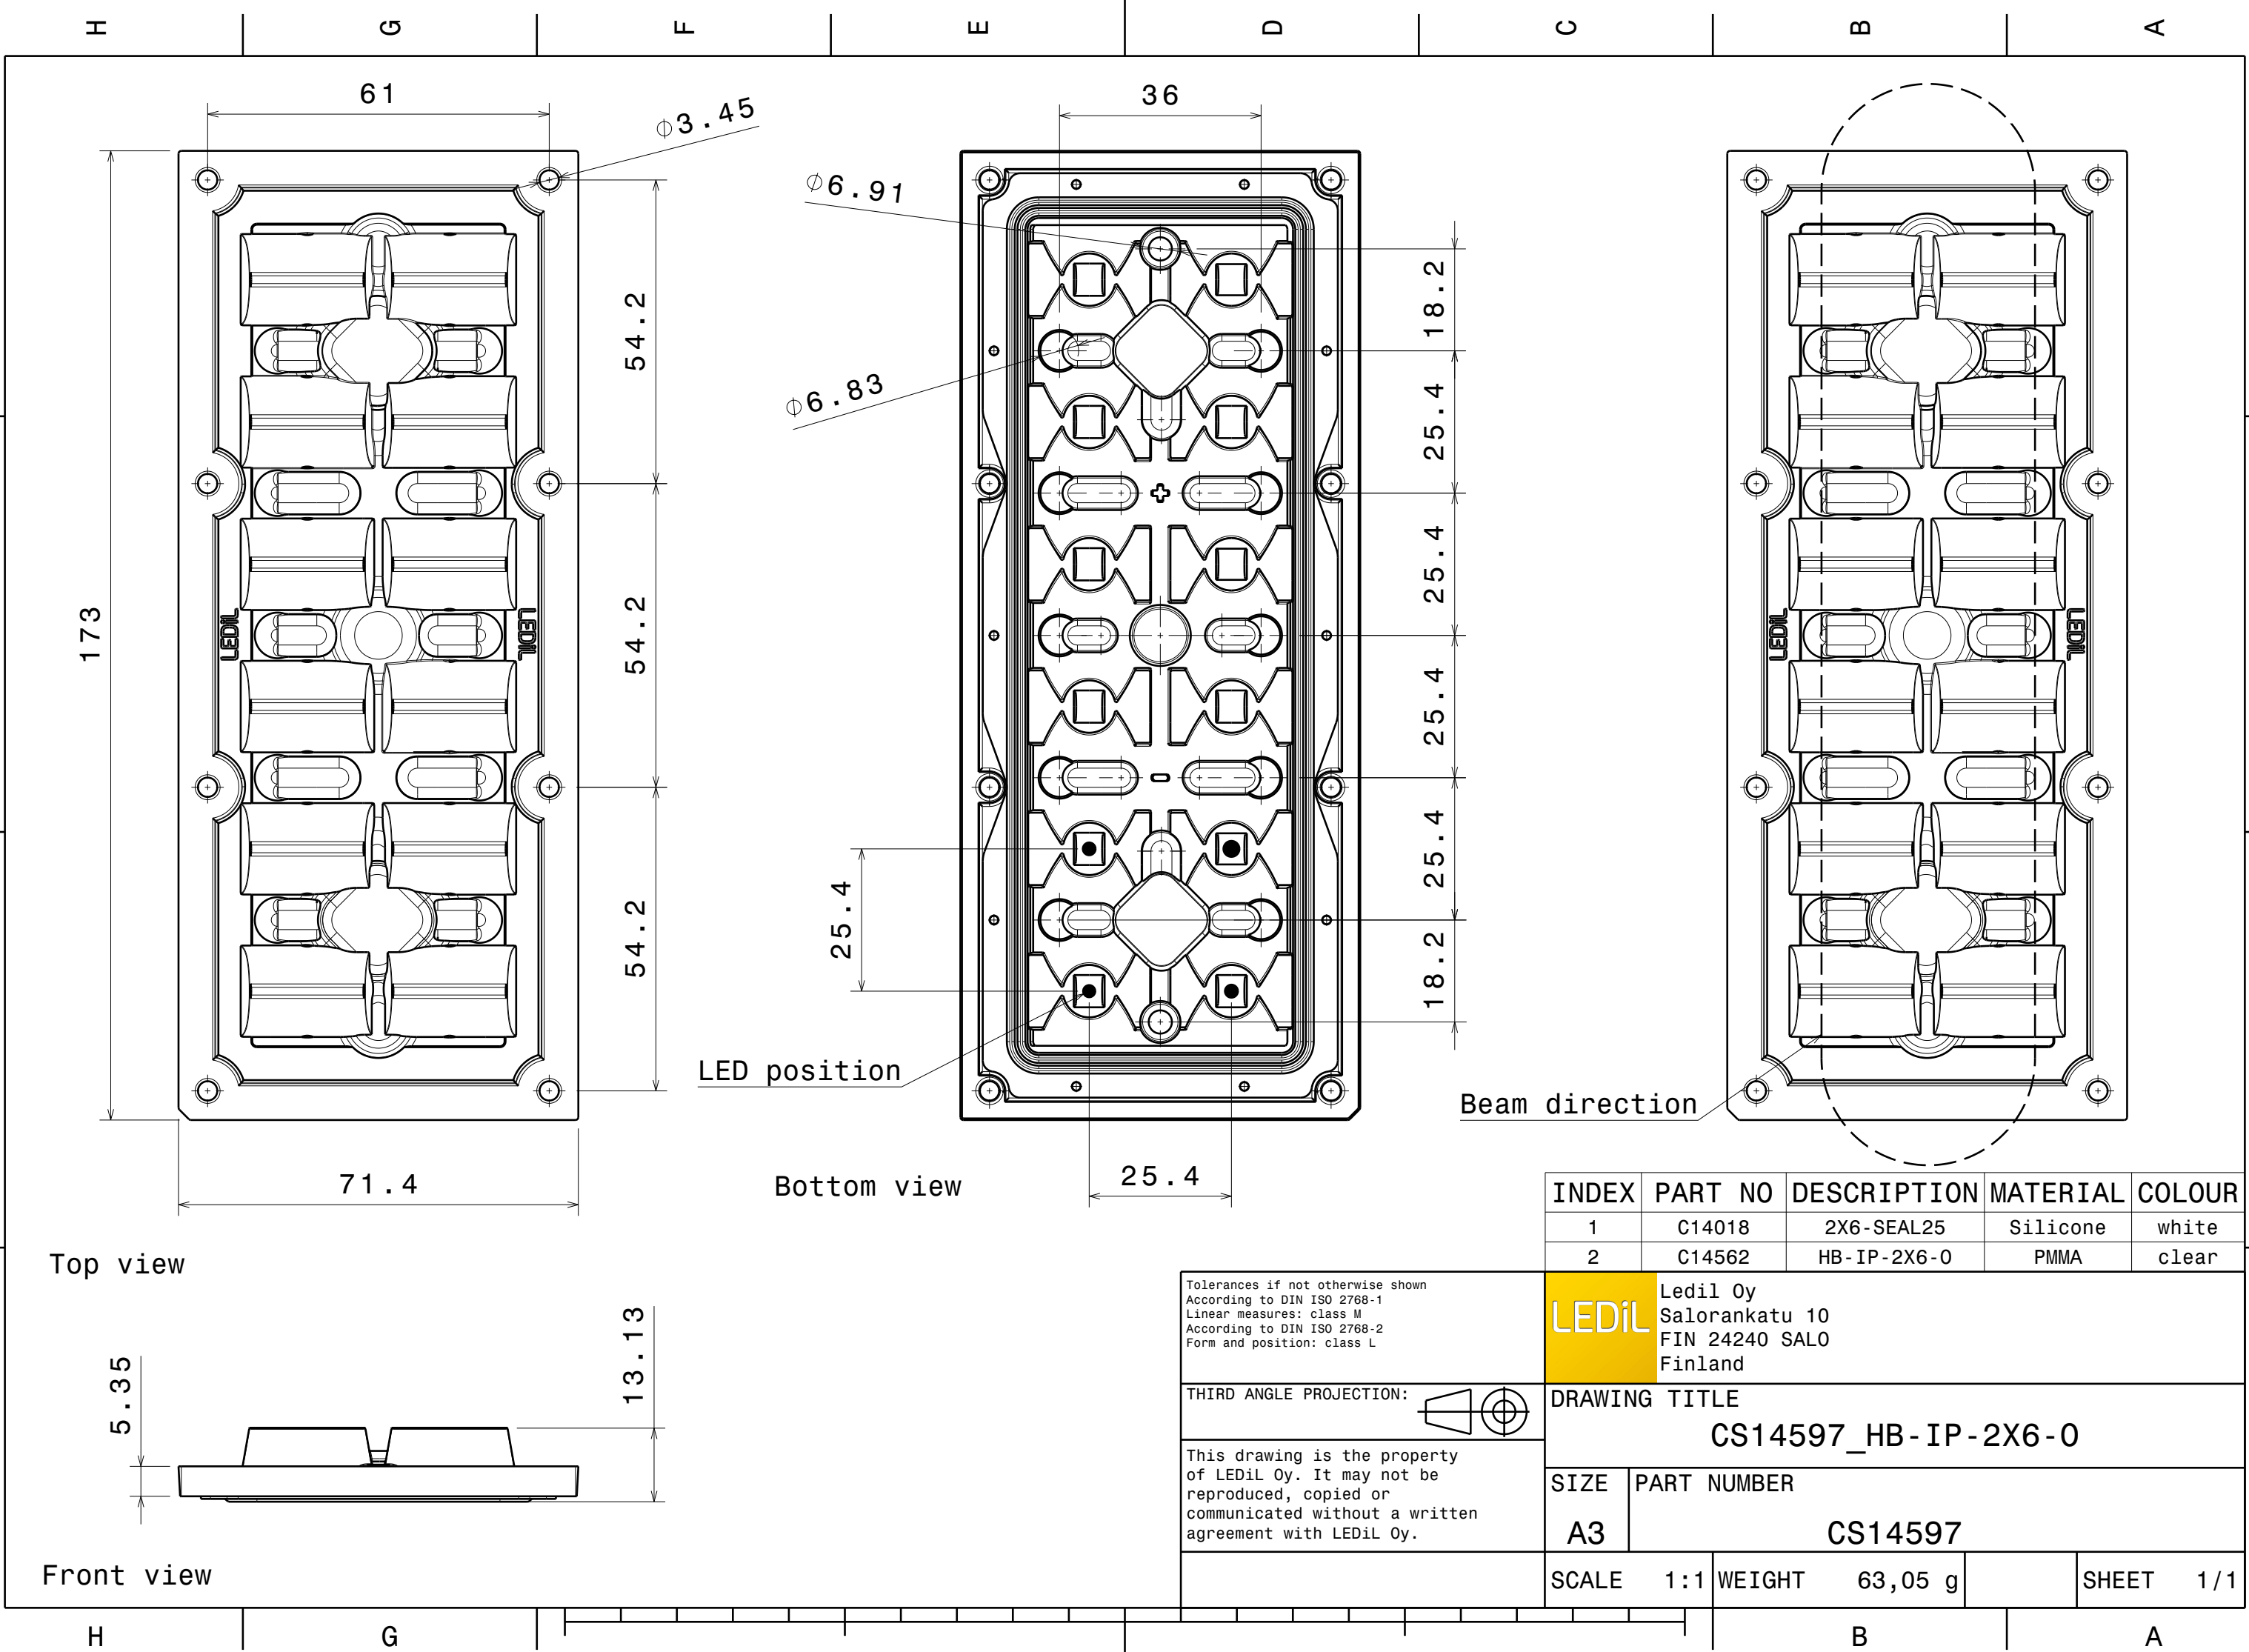


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(XM-L)

Lamps: 1 x Cree_XM_L_2x6_(XMLAWT-00-0000-000LT2OE7)_995.915lm@250mA_P=8.16796W_I=0.2498A

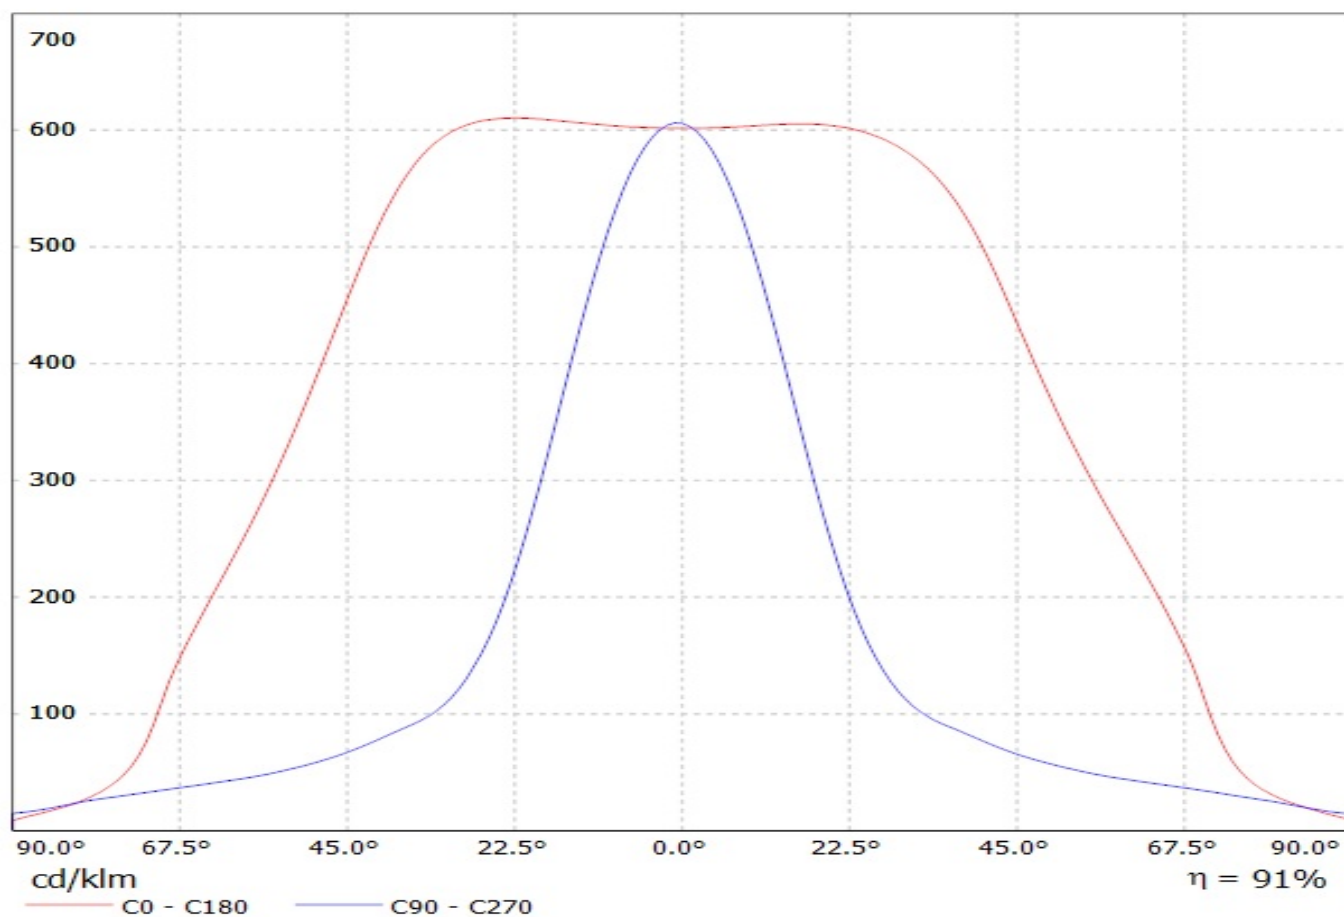


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(XP-G2)


Lamps: 1 x Cree_XP-G2_2x6_1237.61lm@250mA_P=8.57988W_I=0.2498A

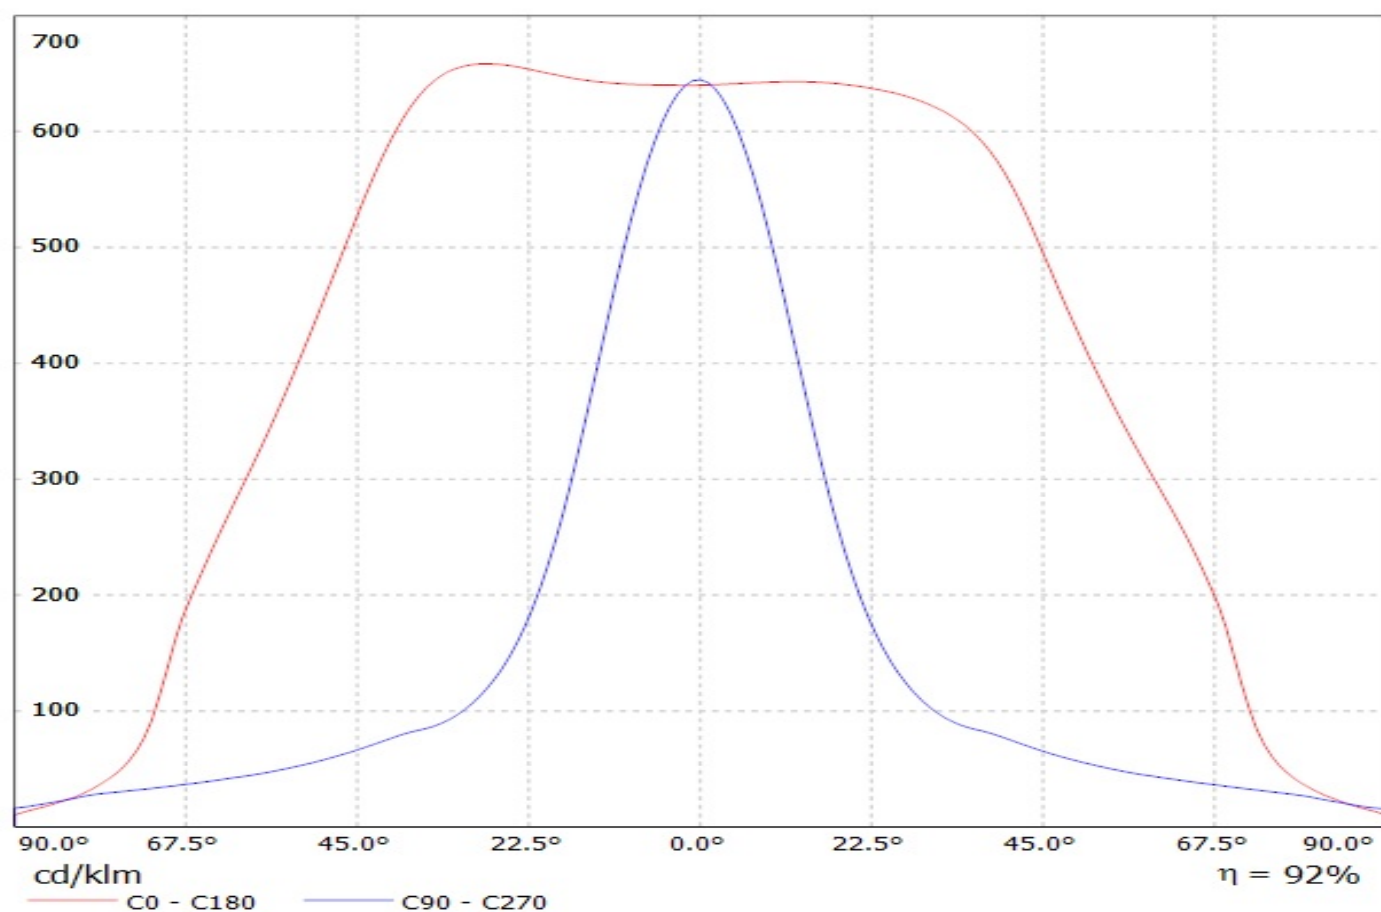

Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(XP-G)
Lamps: 1 x Cree_XP-G_2x6_779.527lm@250mA_P=8.54416W_η=0.2498A

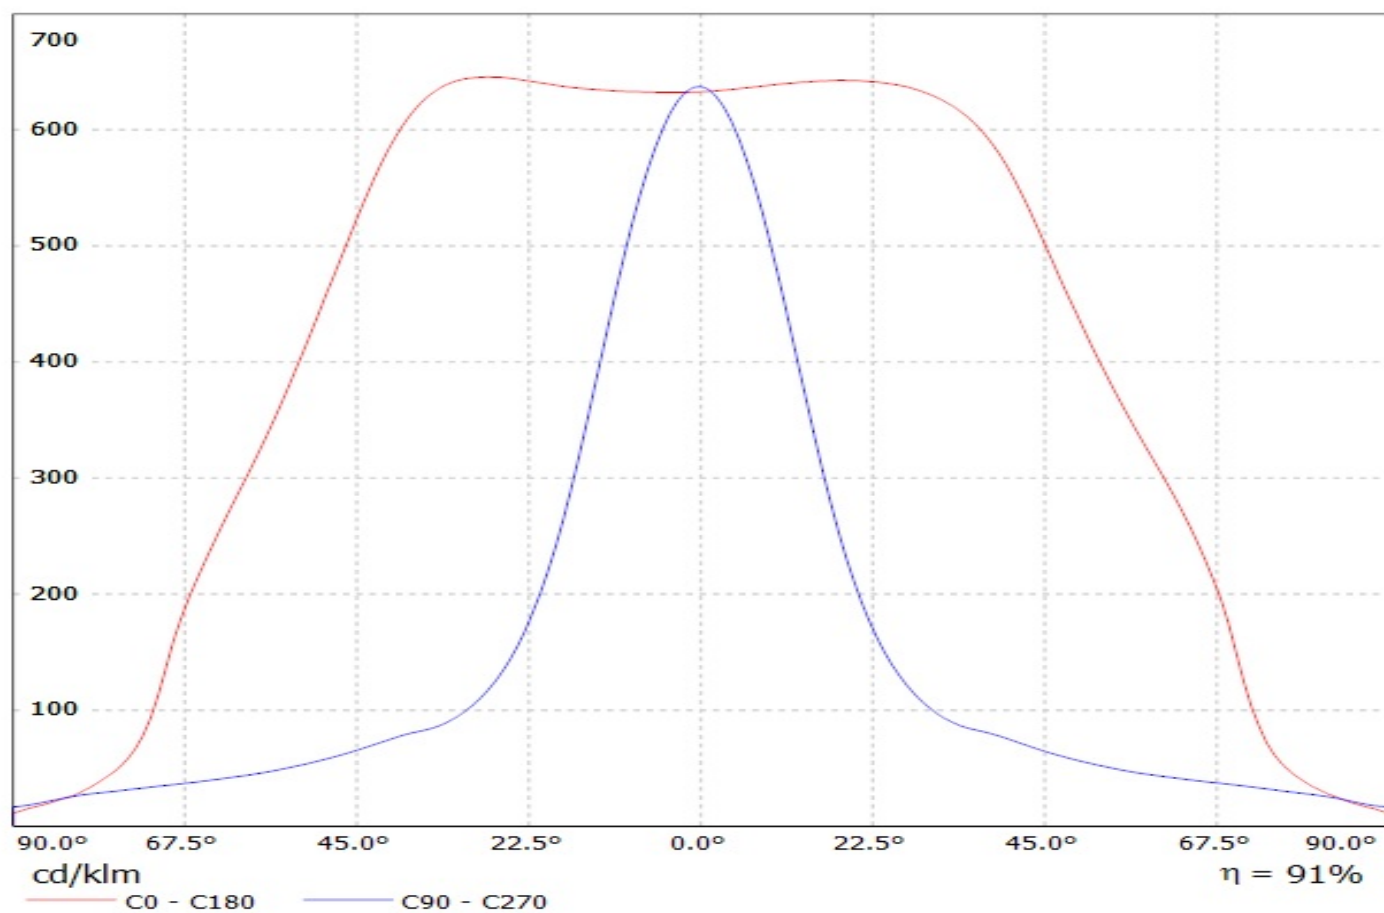


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(XT-E)
Lamps: 1 x Cree_XT-E_2x6_1235.9lm@250mA_P=8.88264W_I=0.2498A

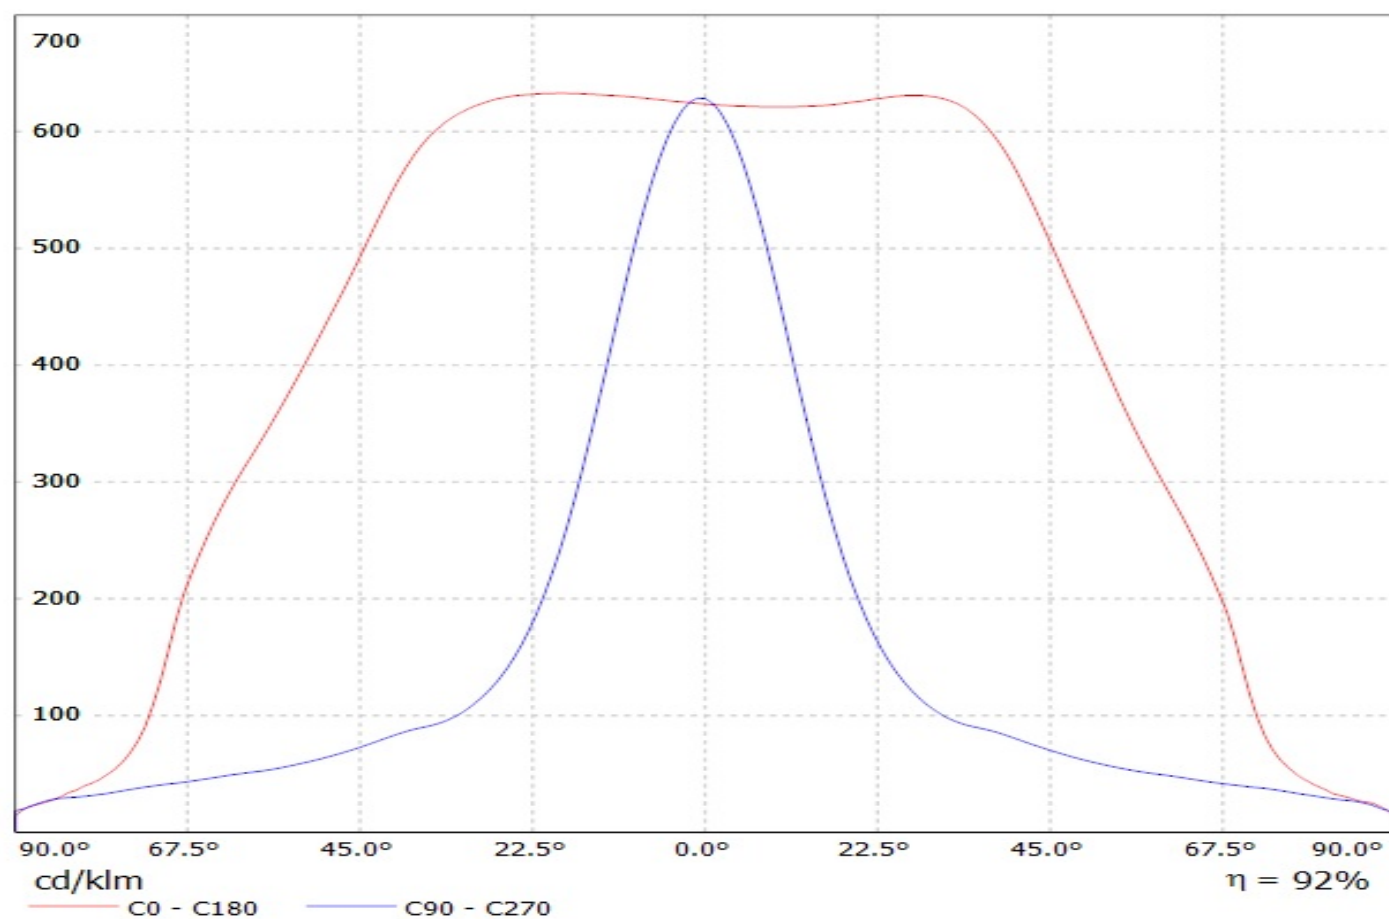


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(XM-L2)


Lamps: 1 x Cree_XM-L2_(XMLBWT-00-0000-000LT30E7)_1173.92lm@250mA_P=8.28212W_I=0.2498A

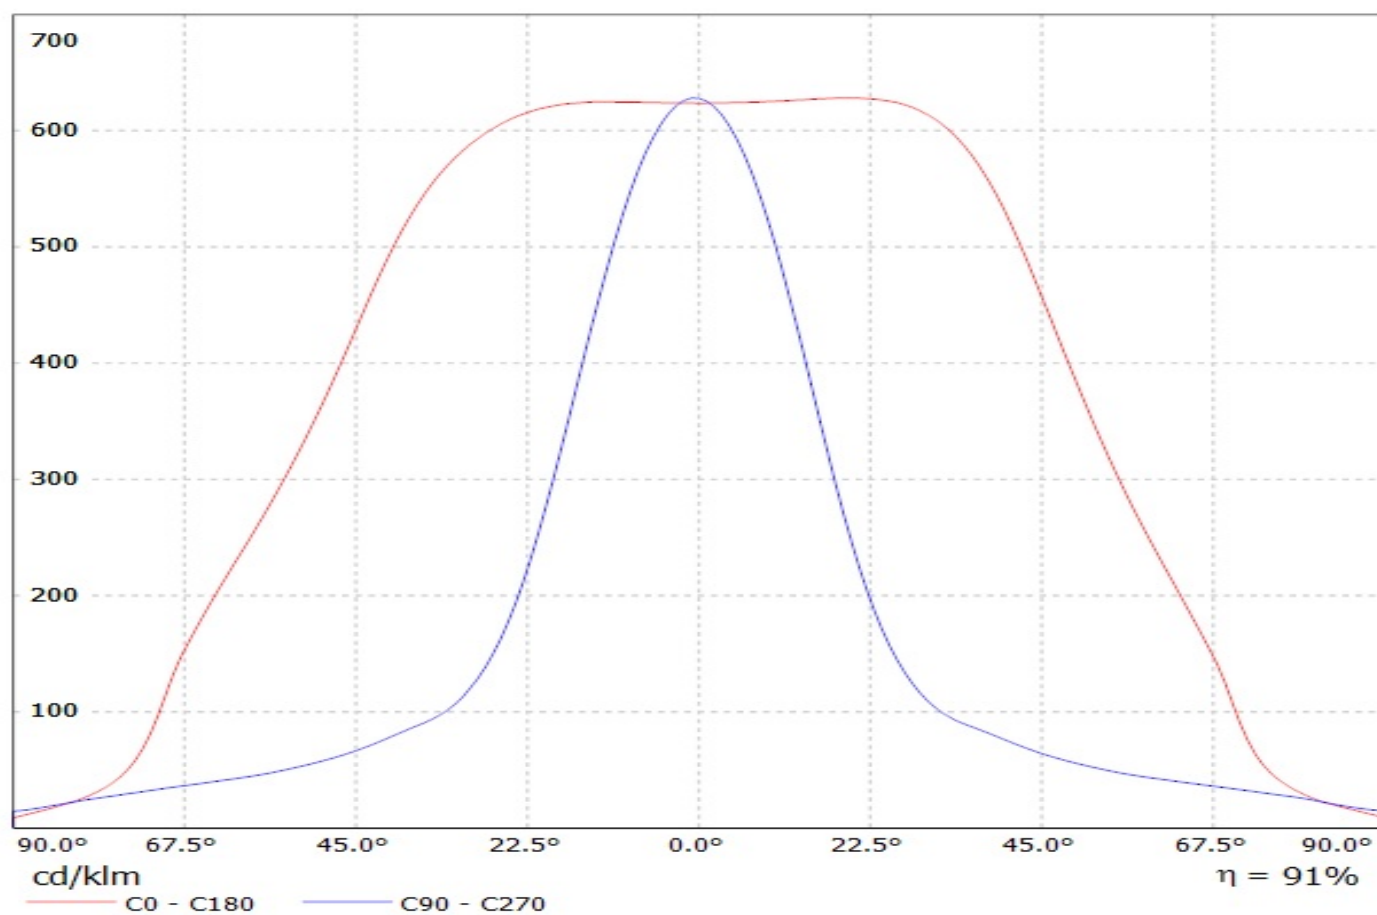


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(XP-L)
Lamps: 1 x Cree_XP-L_2x6_1243.45lm@250mA_P=8.25764W_I=0.2498A

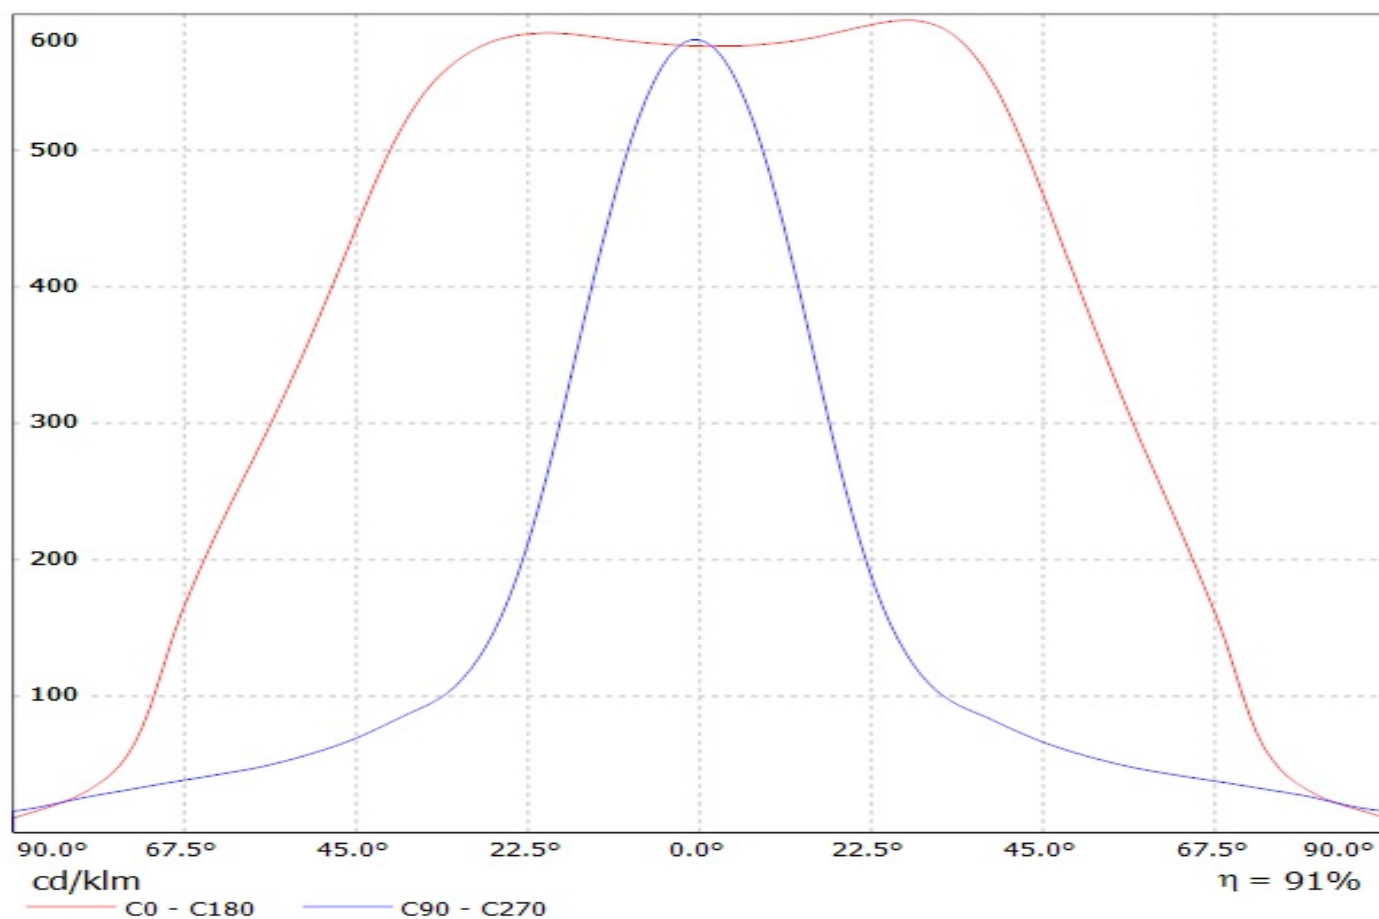


Luminaire: Ledil CS14597_HB-IP-2x6-0_(XP-G3)
Lamps: 1 x Cree_XP-G3_6x2_(XPGDWT-B1-6C1-S3-0-01)_1521.26lm@250mA_P=8.253W_I=0.25A

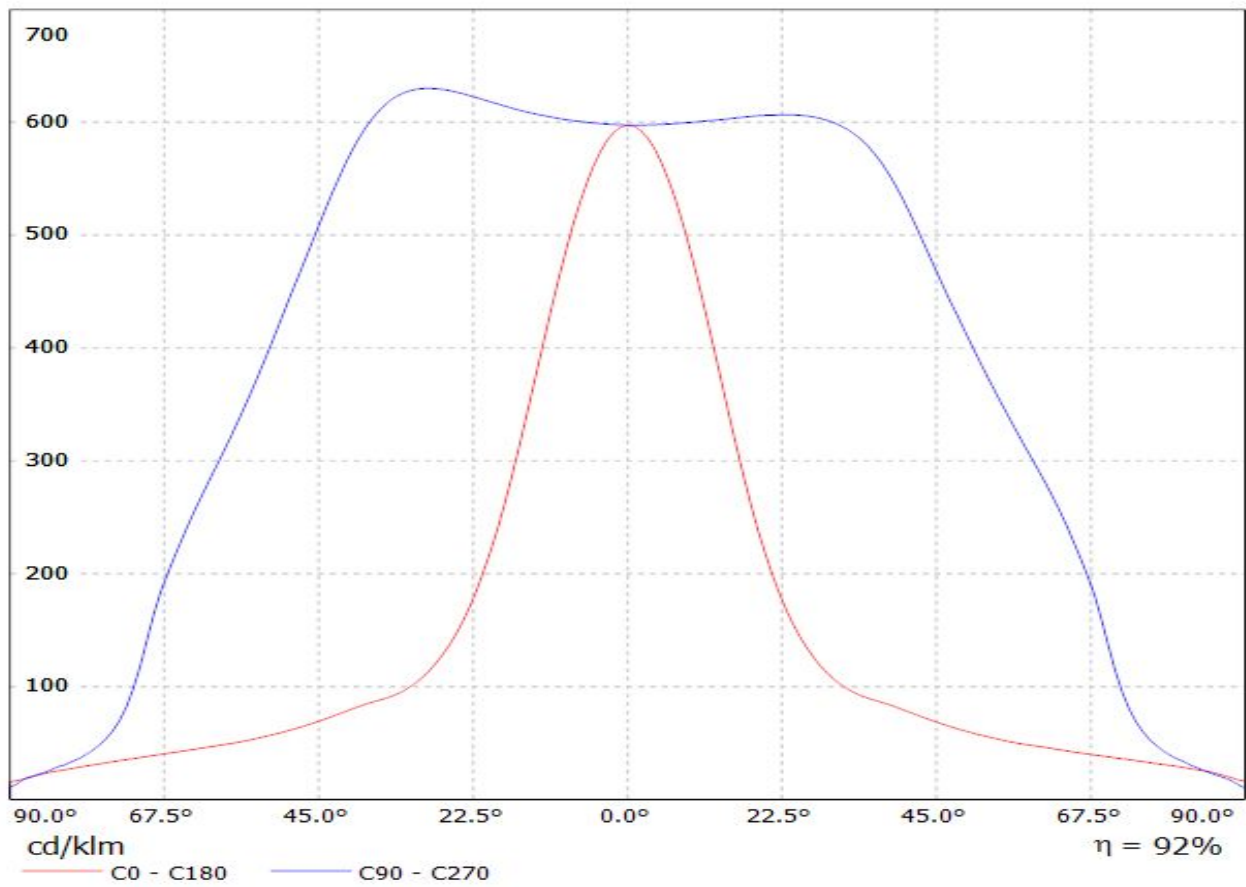


Luminaire: Ledil CS14597_HB-IP-2X6-O_(XP-L2)
Lamps: 1 x Cree_XP-L2x12_(XPGBWT-H1-3B0-R5-0-01)
1666.32lm@250mA_CCT=5000_P=8.239W_I=0.25A

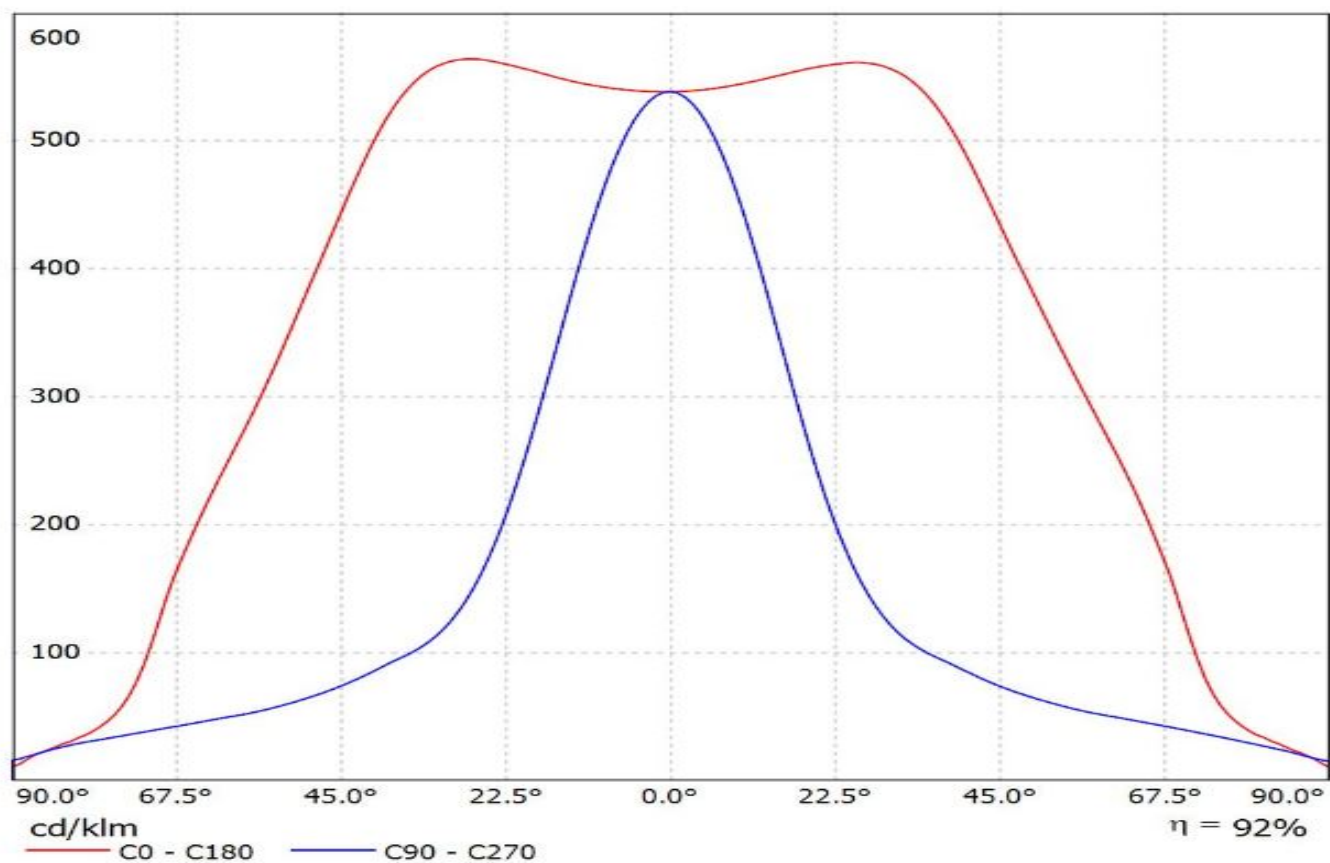

Luminaire: Ledil Oy CS14597_HB-IP-2X6-O_(H35C1)_SIMULATED
Lamps: 1 x LG H35C1

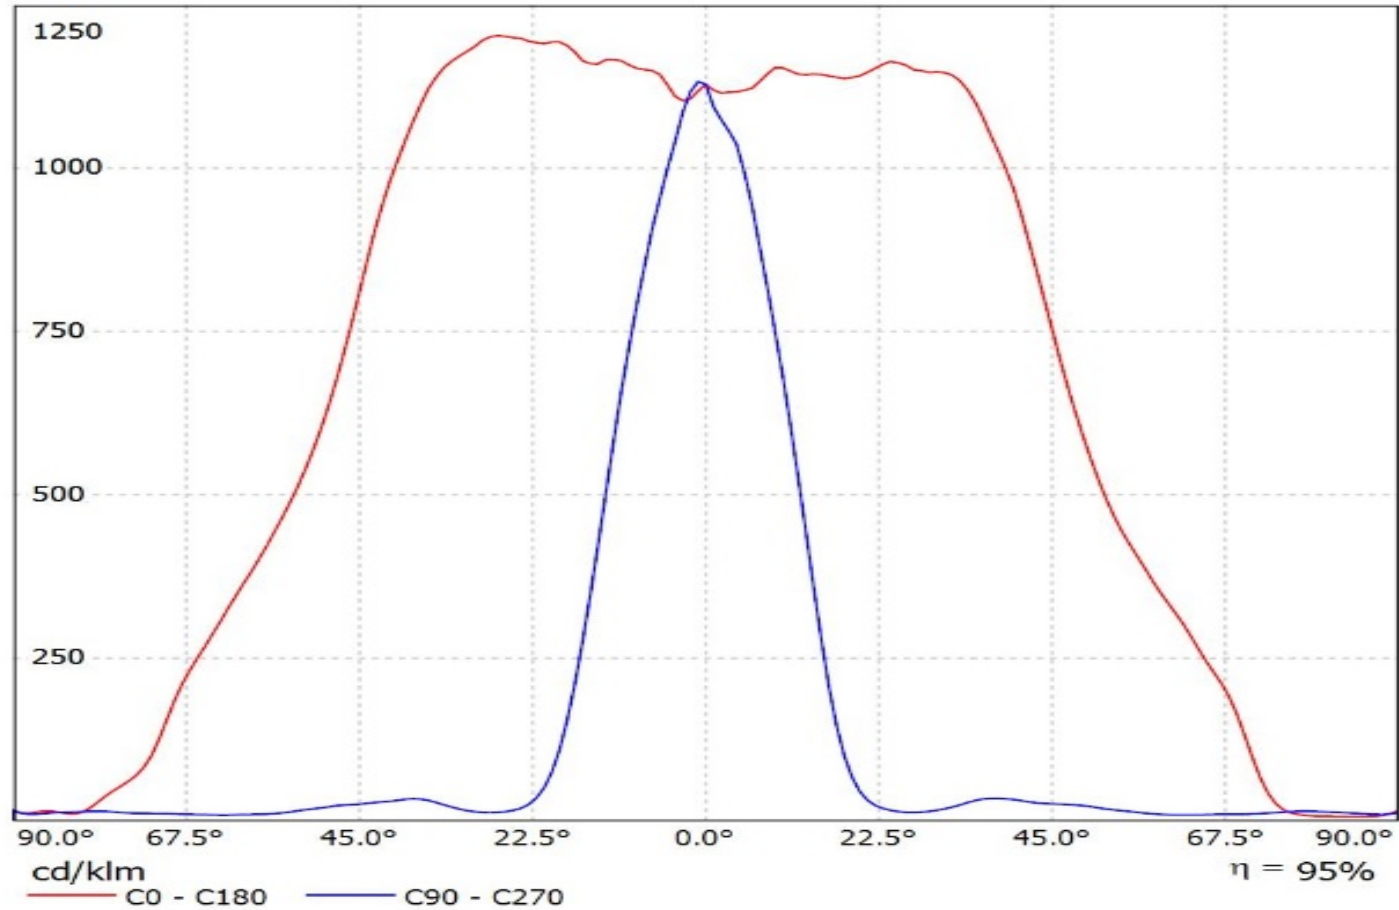


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Luxeon_T)_2
Lamps: 1 x Luxeon_T_2x6_(LXH8-FW30)_1041.23lm@250mA_P=8.37779W_I=249.8mA

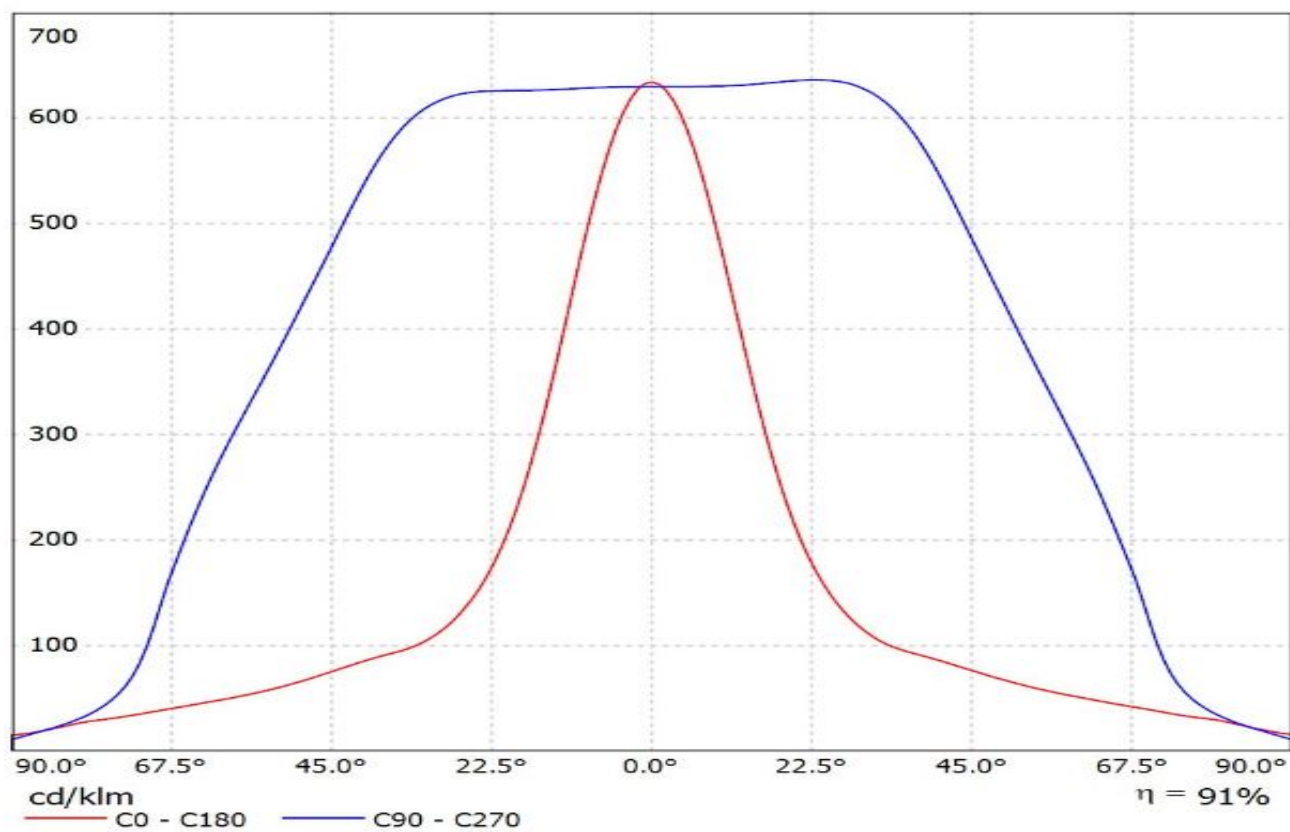


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Luxeon_R)

Lamps: 1 x Philips_Lumileds_Luxeon_R_2x6_848.853lm@250mA_P=9.03352W_I=0.2498A

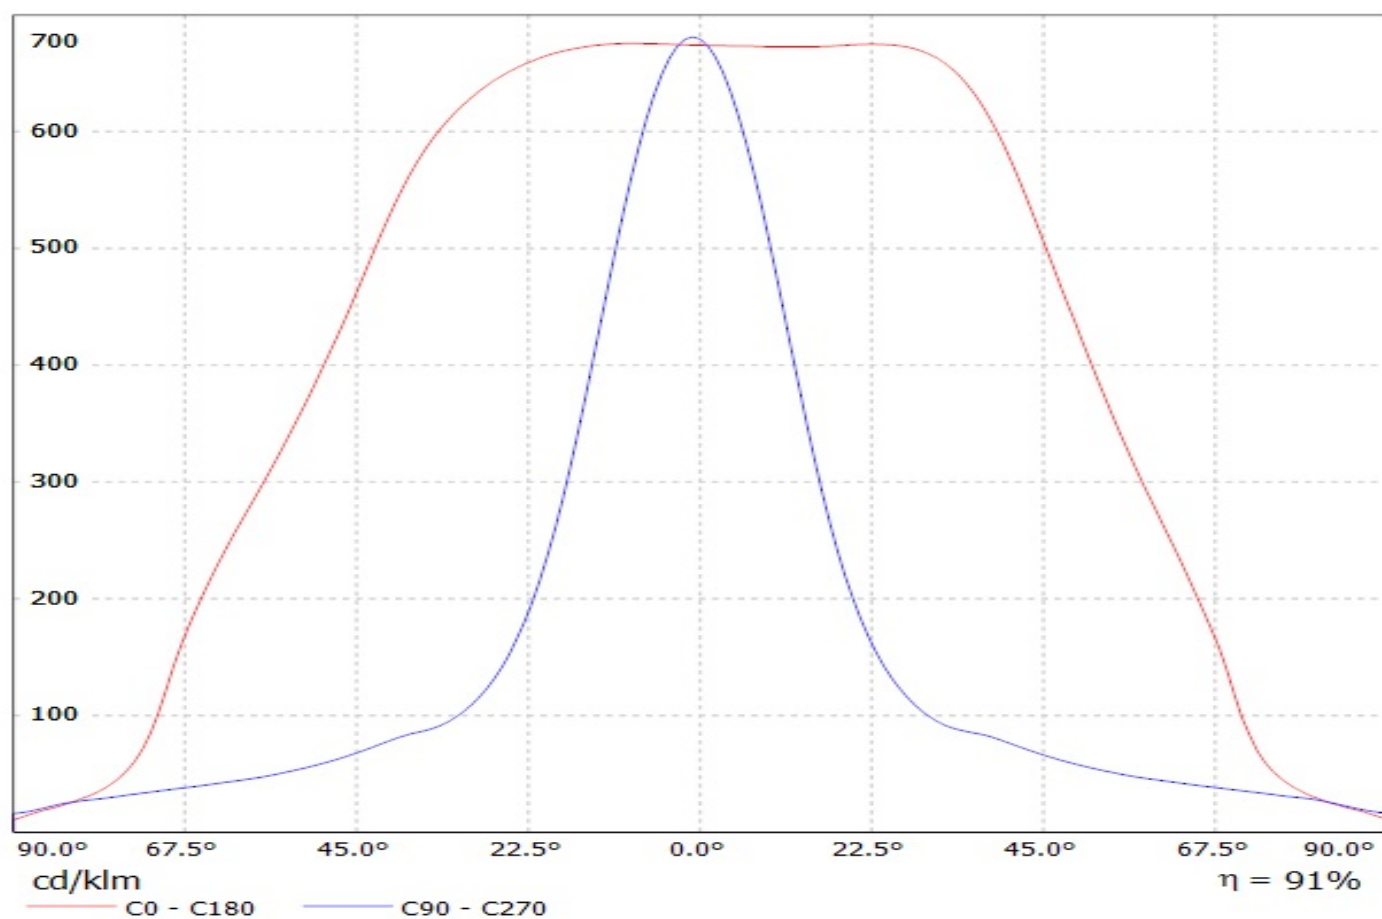


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Luxeon_Rebel)

Lamps: 1 x Philips_Lumileds_Luxeon_Rebel_2x6_(LXM8-PW30)_745.574lm@250mA_P=8.36755W_I=0.2498A

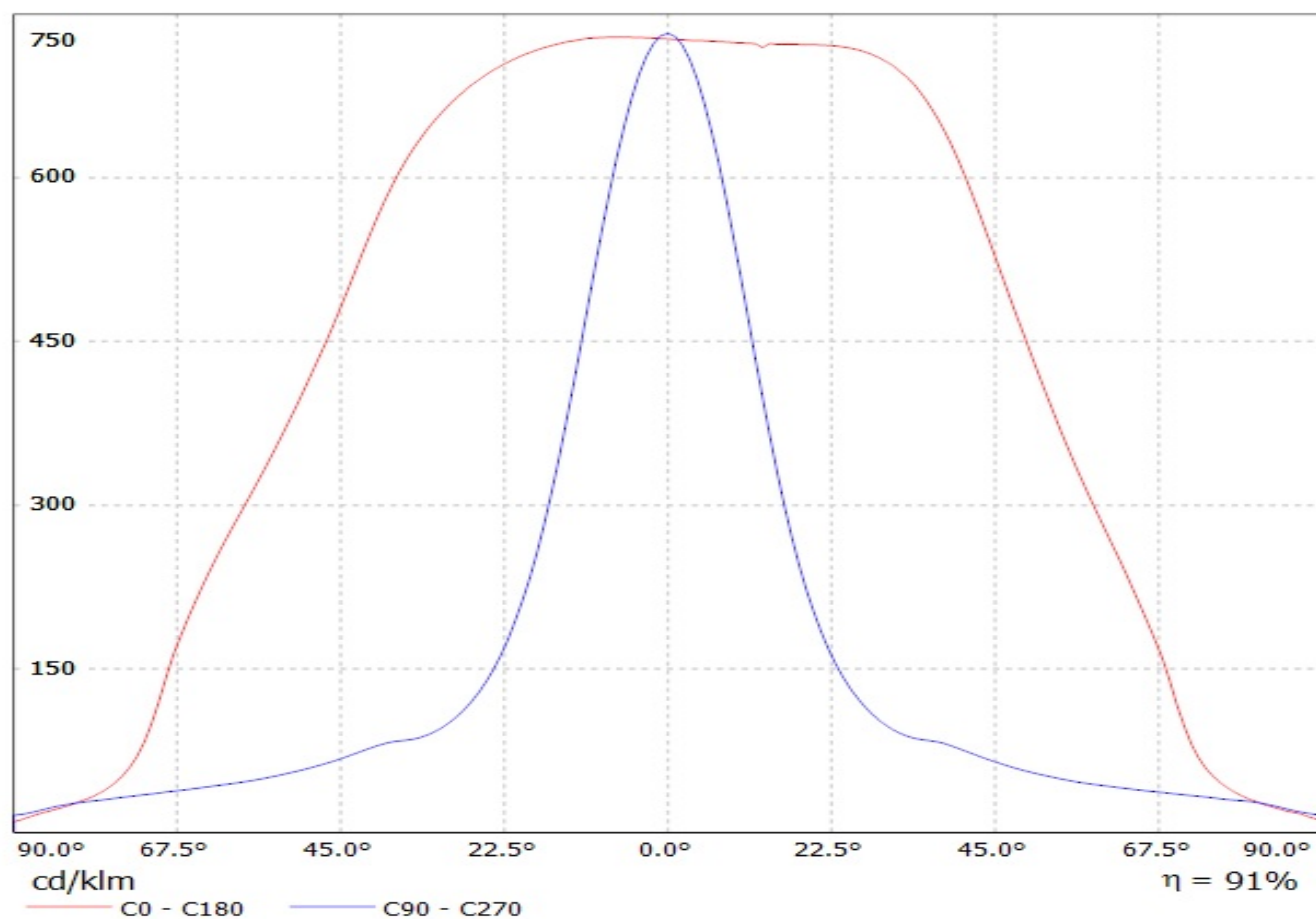


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Luxeon_Rebel_ES)

Lamps: 1 x Philips_Lumileds_Luxeon_Rebel_ES_2x6_1132.87lm@250mA_P=8.30967W_I=0.2499A

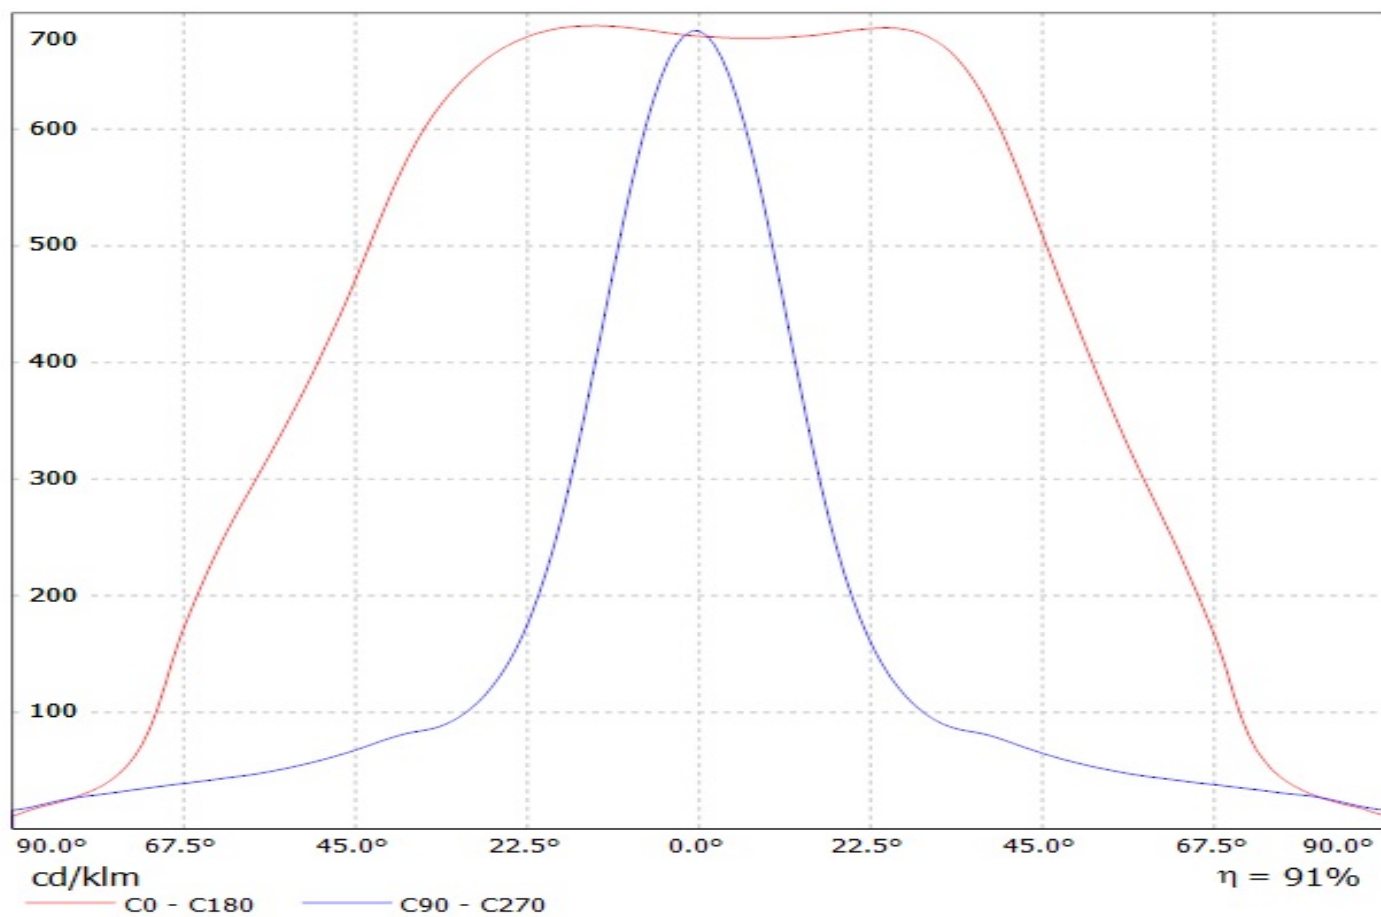


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Luxeon_Z_ES)

Lamps: 1 x Philips_Lumileds_Luxeon_Z_ES_2x6_977.042lm@250mA_P=8.33092W_I=0.2499A

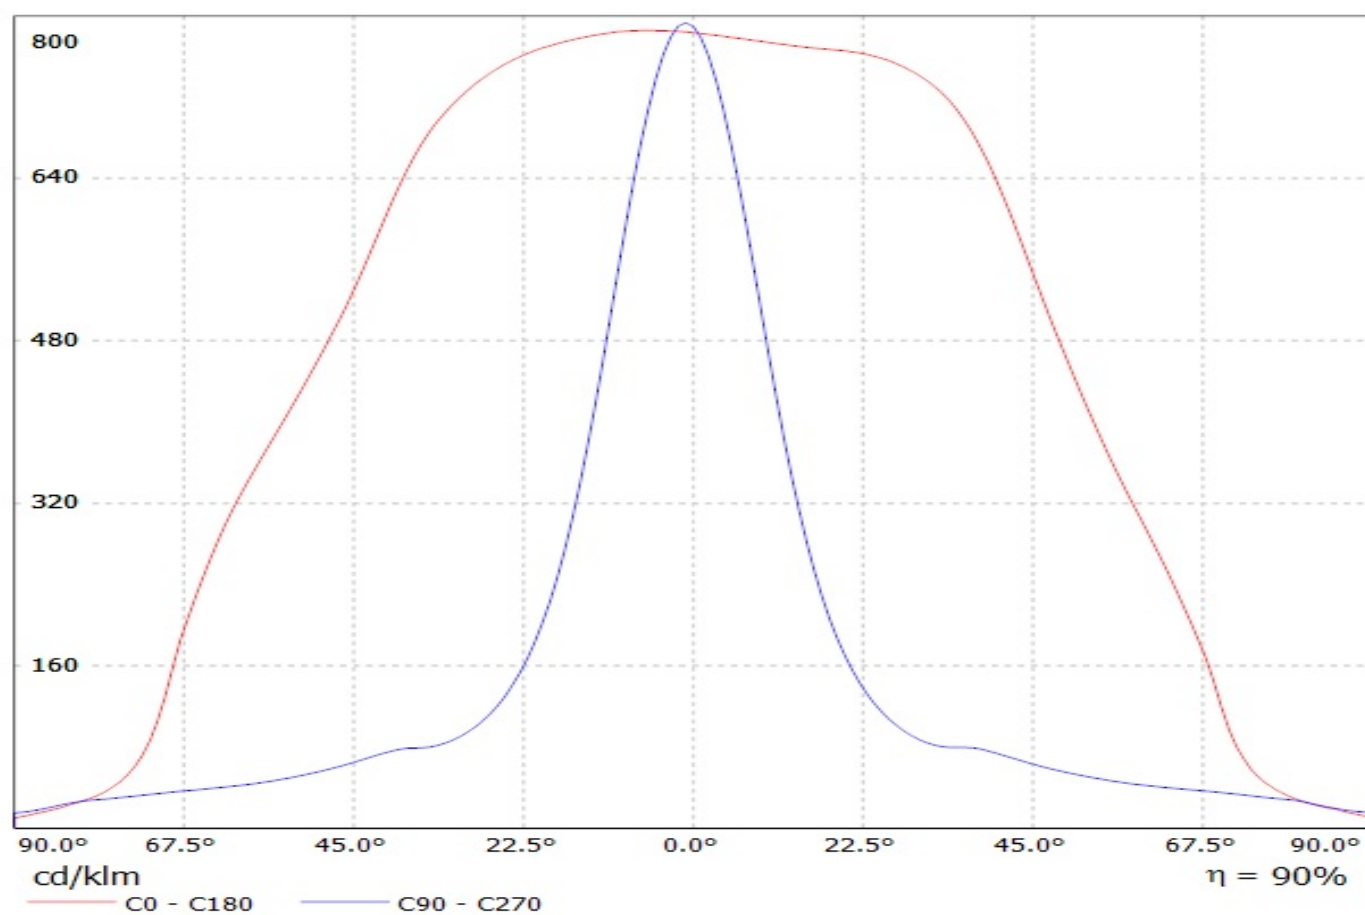


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Luxeon_TX)

Lamps: 1 x Philips_Lumileds_Luxeon_TX_2x6_1294.69lm@250mA_P=8.32967W_I=0.2499A

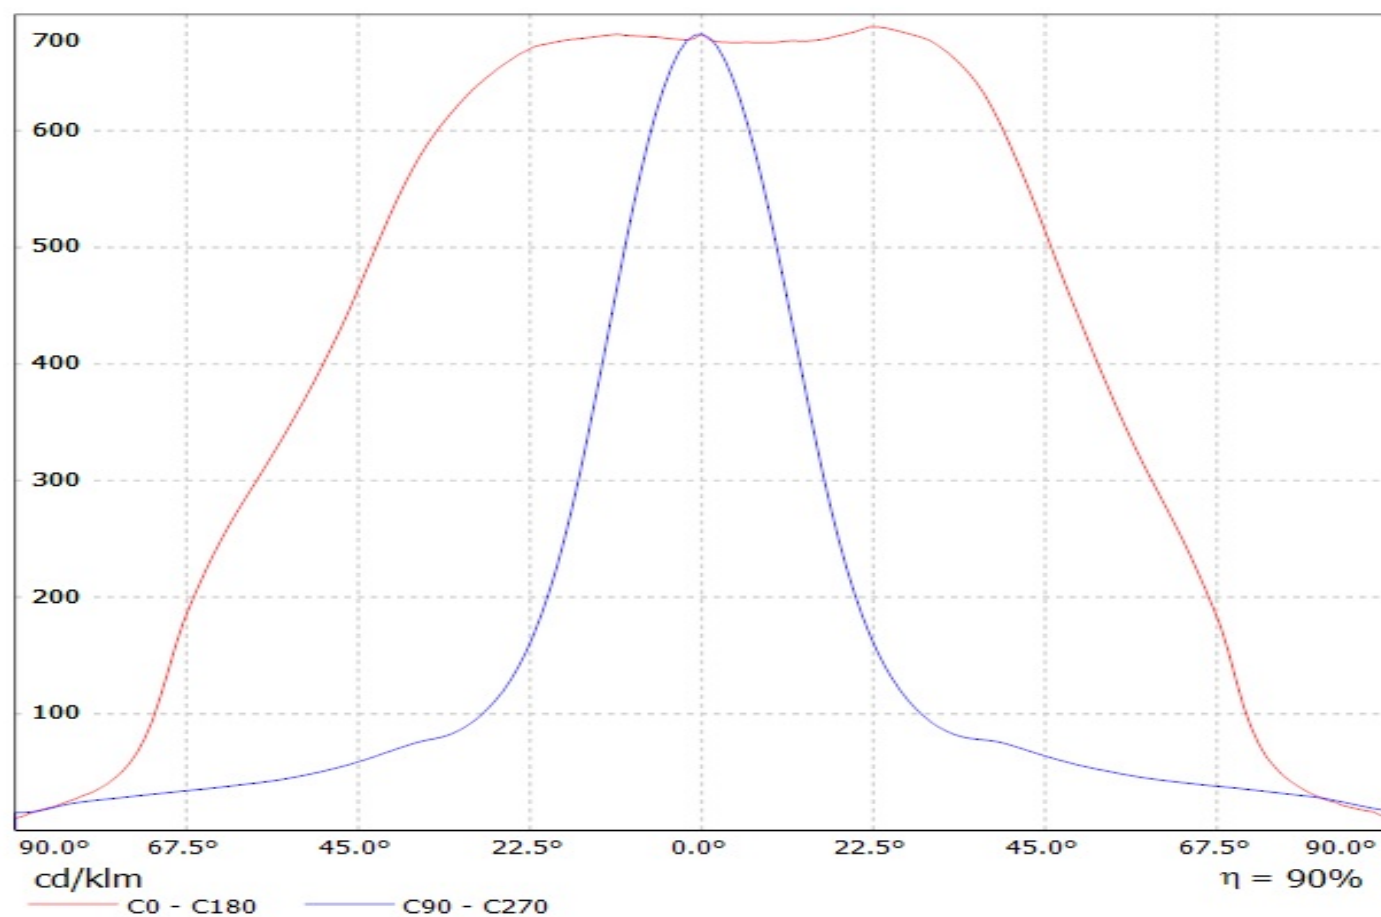


Luminaire: Ledil CS14597_HB-IP-2X6-O_(XR-TX)


Lamps: 1 x Luxeon_XR-TX_1376.41lm@250mA_P=8.3920W_I=0.250A

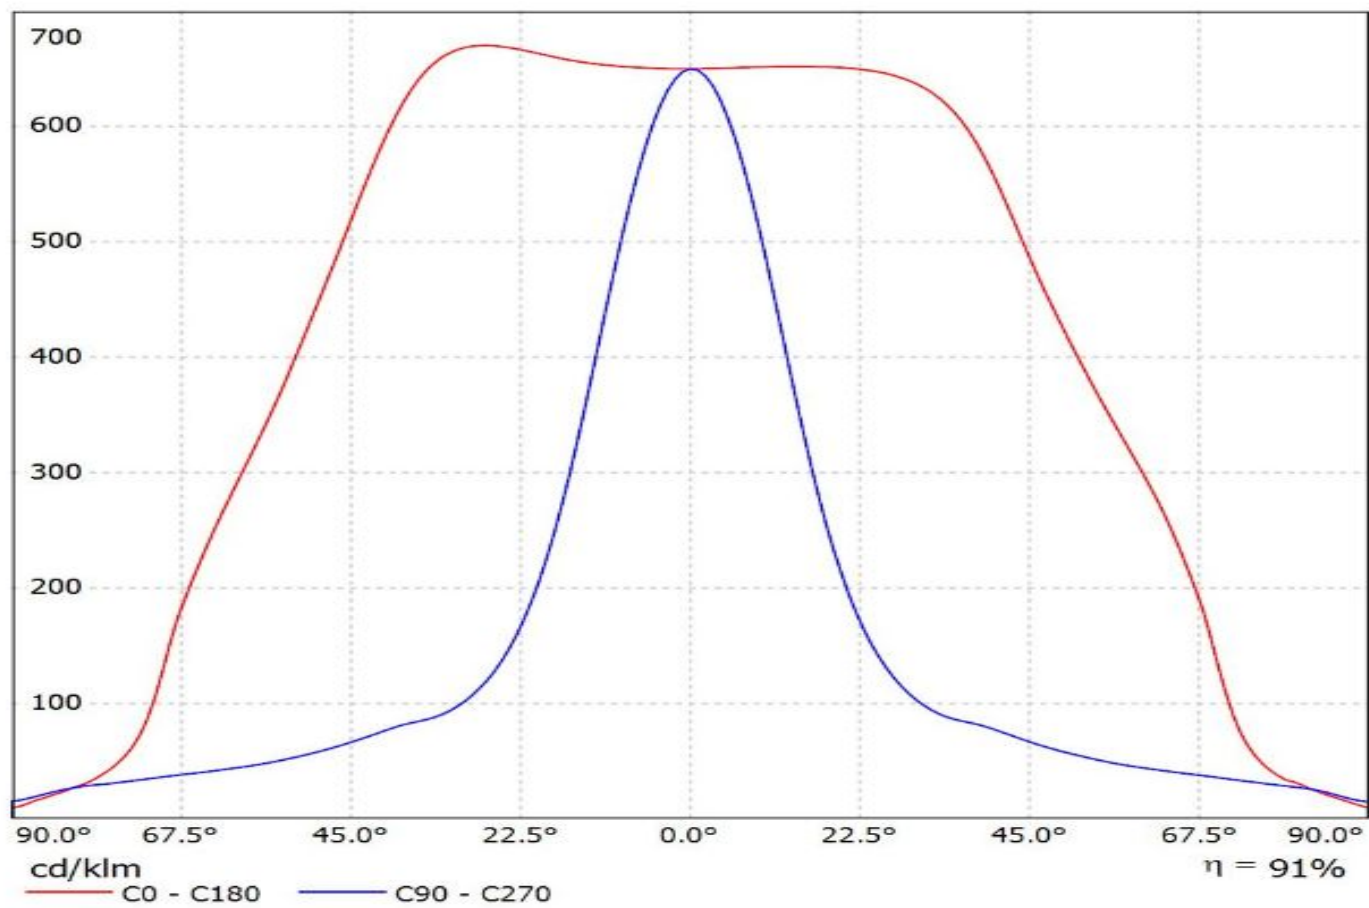

Luminaire: Ledil Oy CS14597_HB-IP-2X6-O_LUXEON-5050_SIMULATED
Lamps: 1 x Lumileds Luxeon 5050

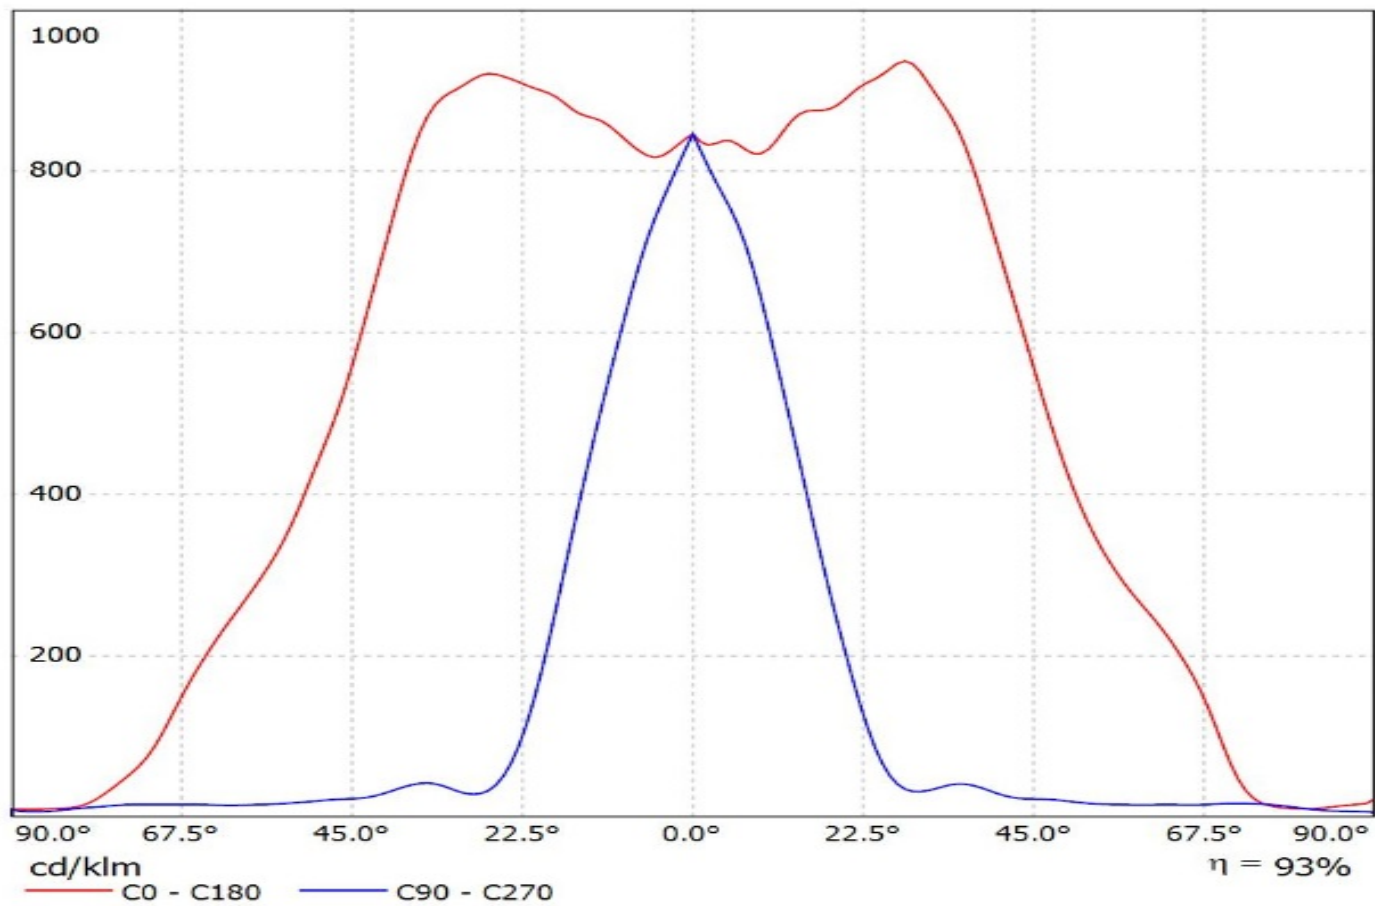


Luminaire: Ledil CS14597_HB-IP-2X6-O_(Luxeon_V)
Lamps: 1 x Lumileds_Luxeon_V_1451.92lm@250mA_P=8.21196W_U=32.860V

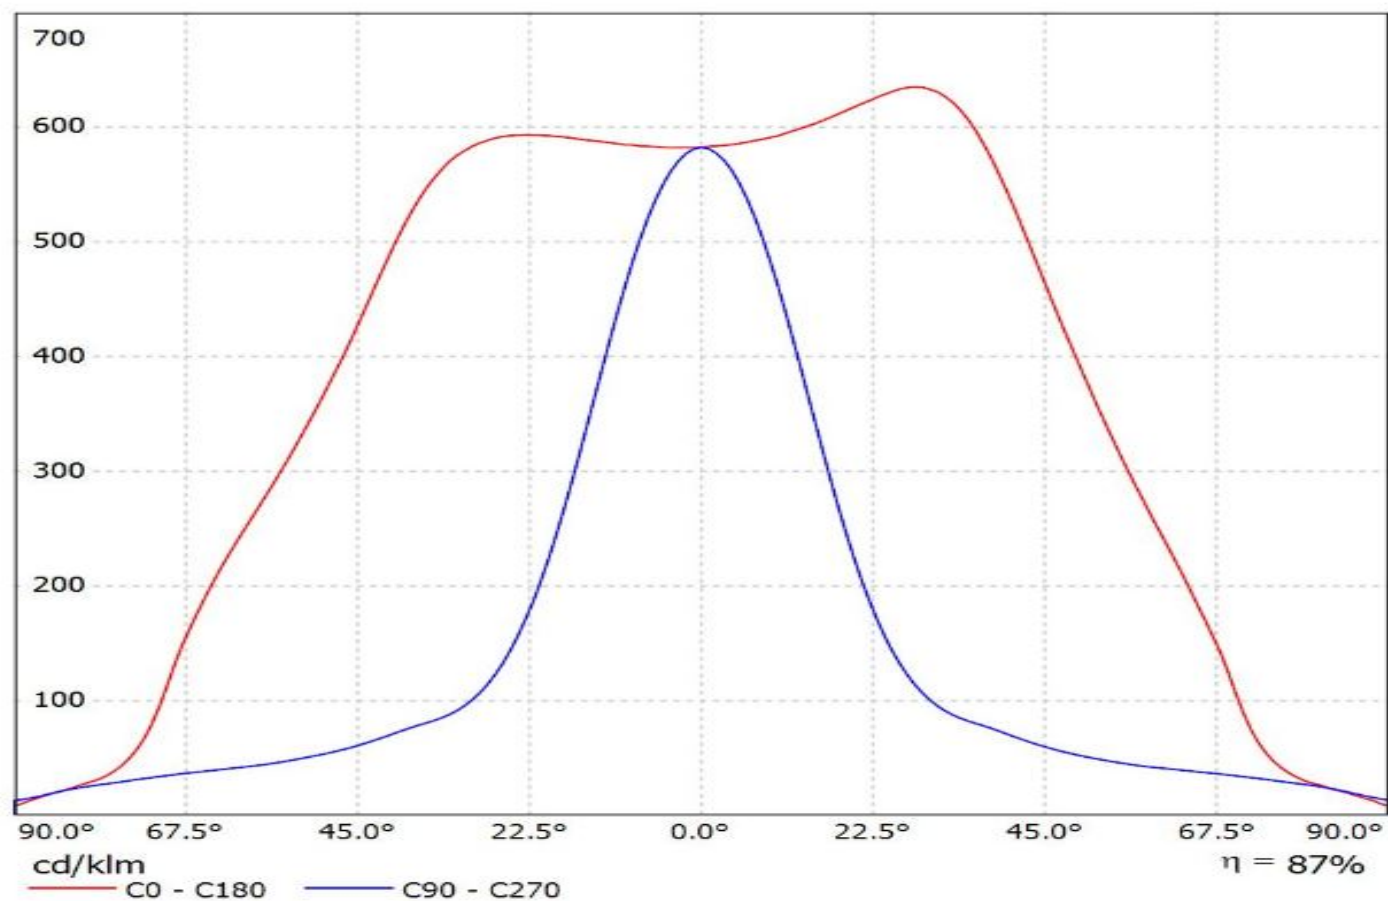



Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(NVSxx19B)

Lamps: 1 x Nichia_NVsxx19B_(NVSL219BT)_2x6_1264.03lm@250mA_P=8.31559W_I=0.2498A

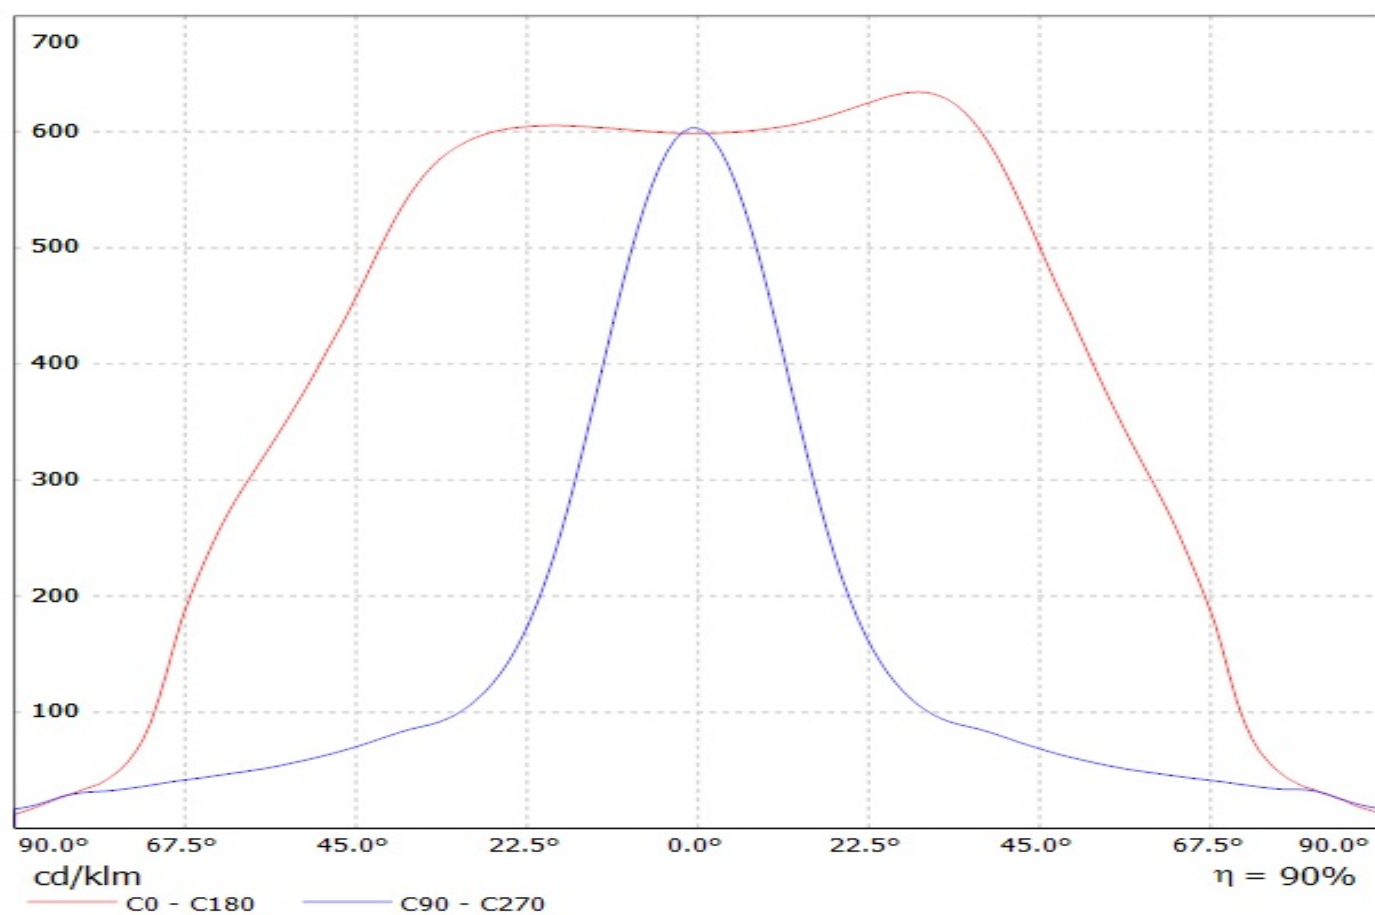


Luminaire: Ledil CS14597_HB-IP-2X6-O_(Nichia_E21)
Lamps: 1 x Nichia_NVSW E21A_602.725lm@600mA_P=3.5006W_I=0.600A

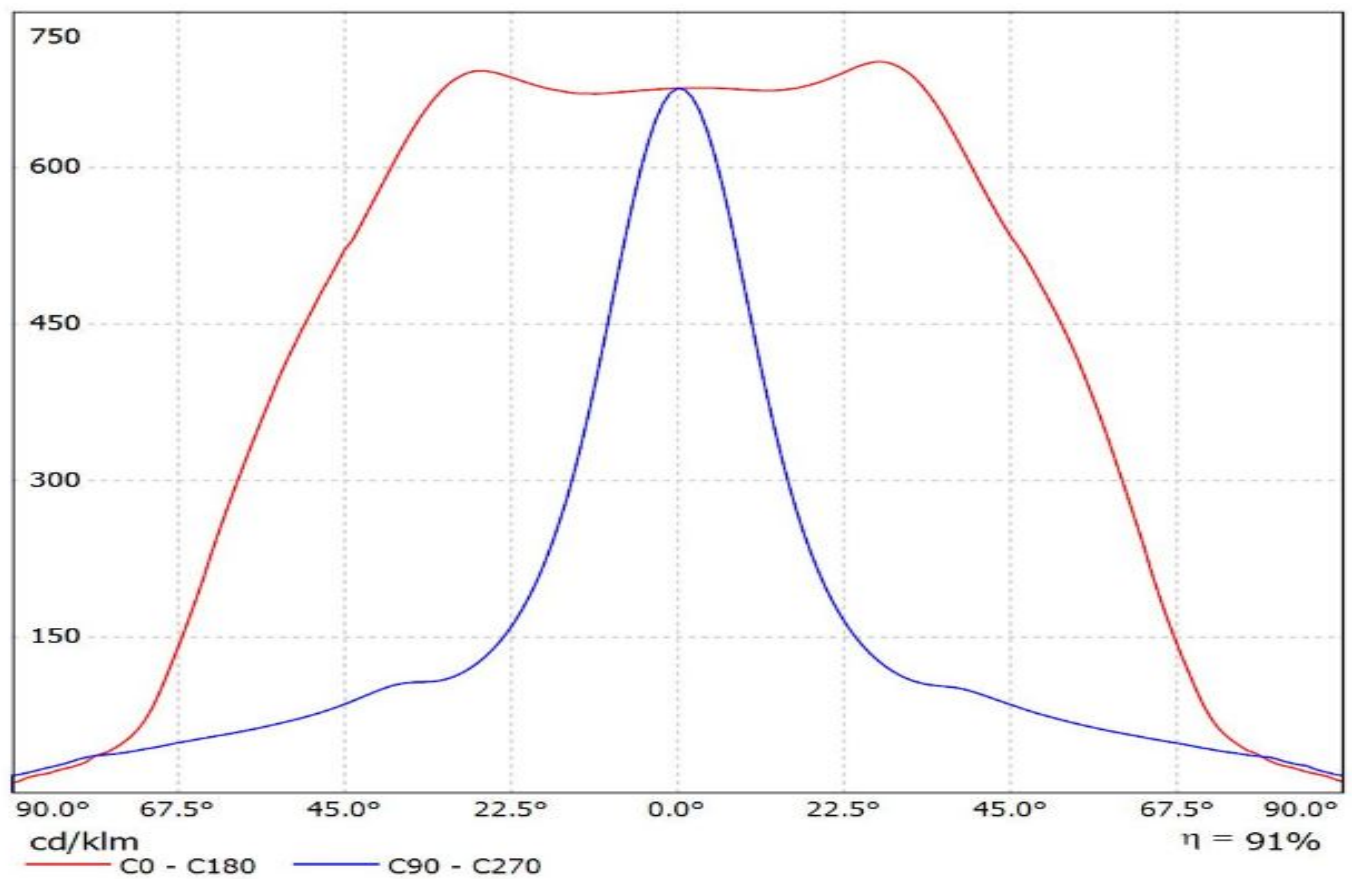

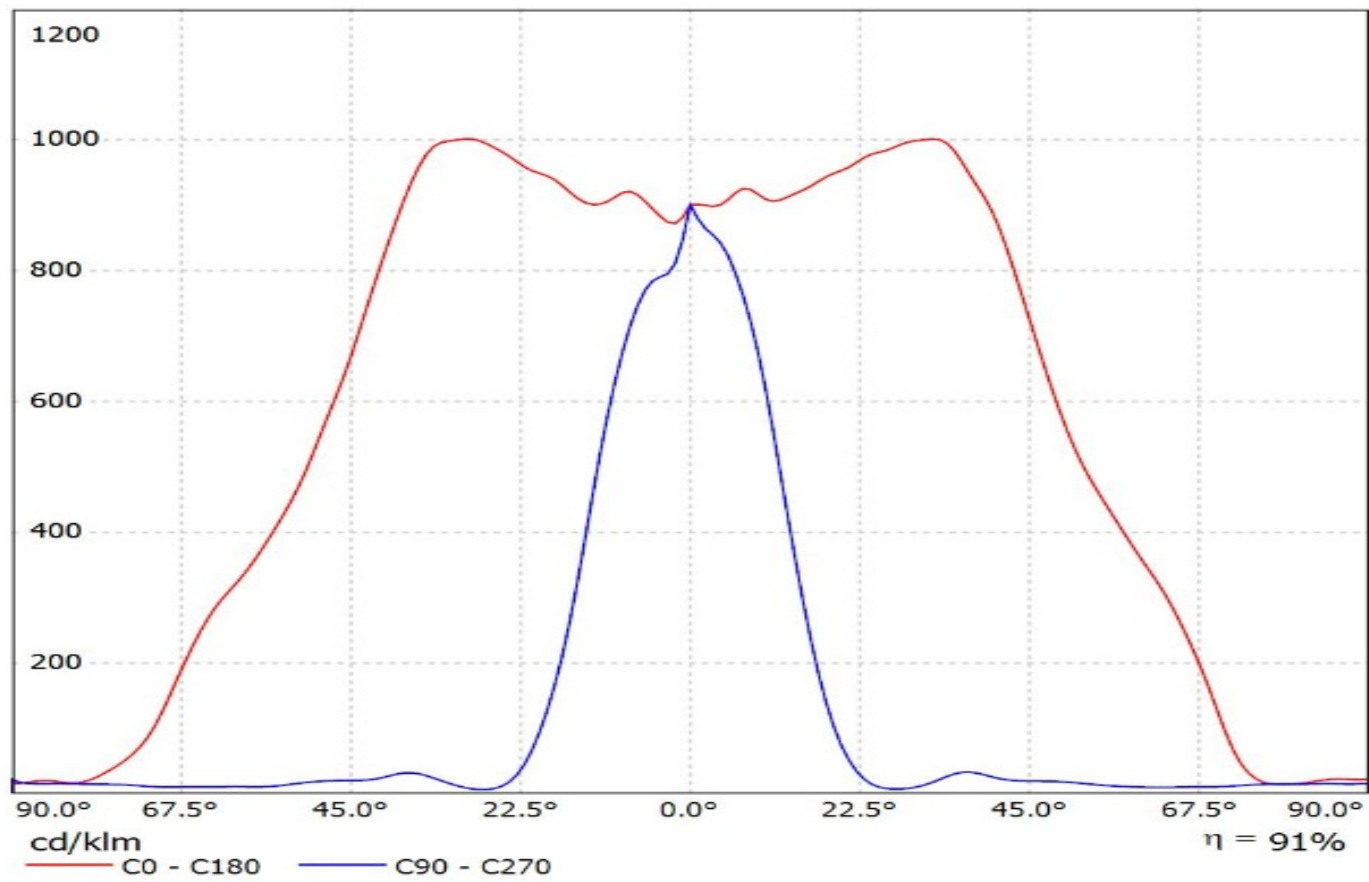


Luminaire: Ledil CS14597_HB-IP-2X6-O_(NVSL219CT)

Lamps: 1 x Nichia_NVSL219CT_2x6_1262.53lm@250mA_P=8.35825W_I=0.25A

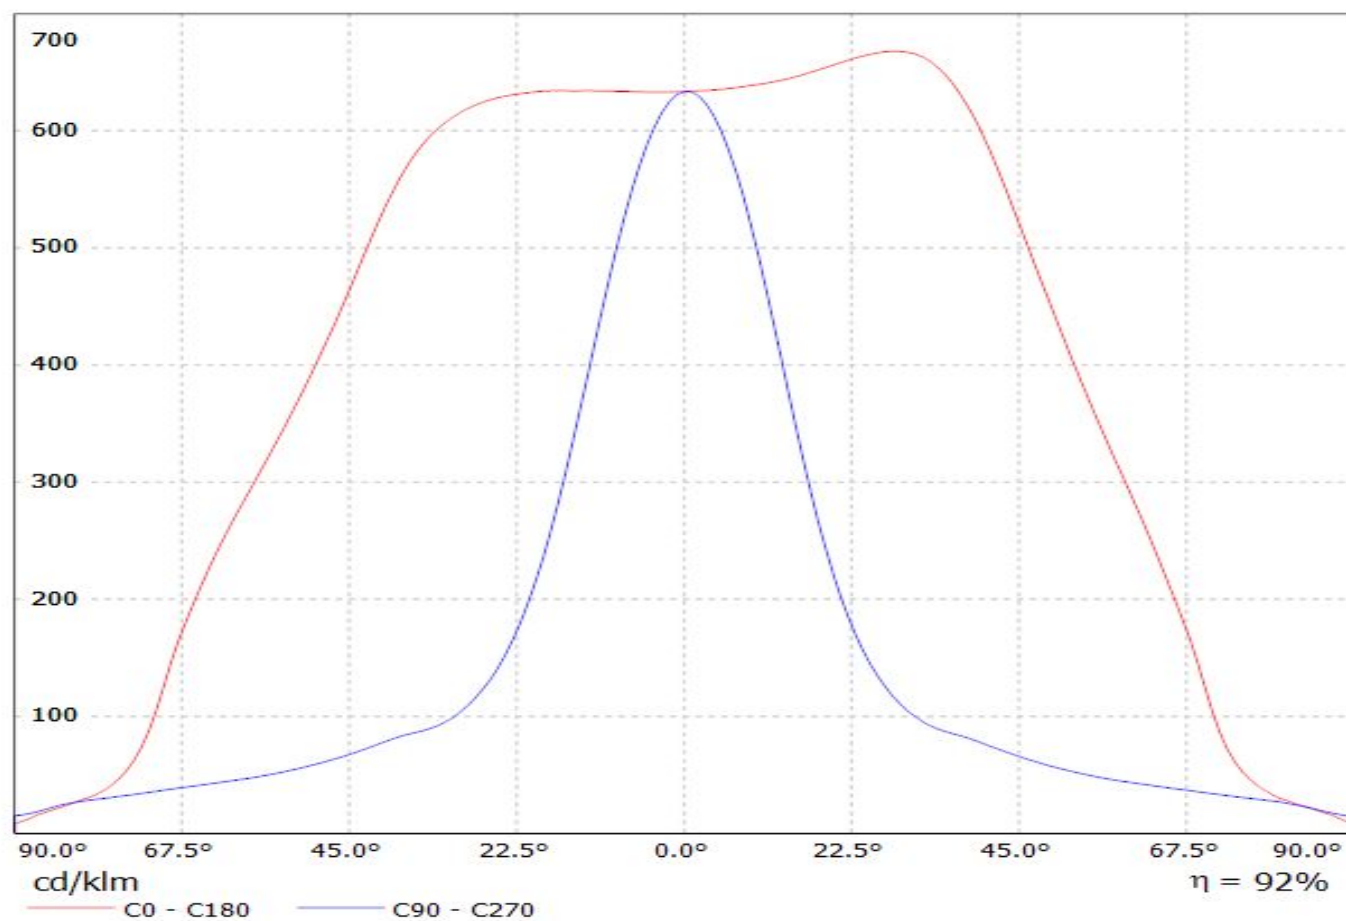


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Oslon_Square_PC)

Lamps: 1 x Osram_Oslon_Square_PC_2x6_1225.05lm@250mA_P=8.80595W_I=0.2498A

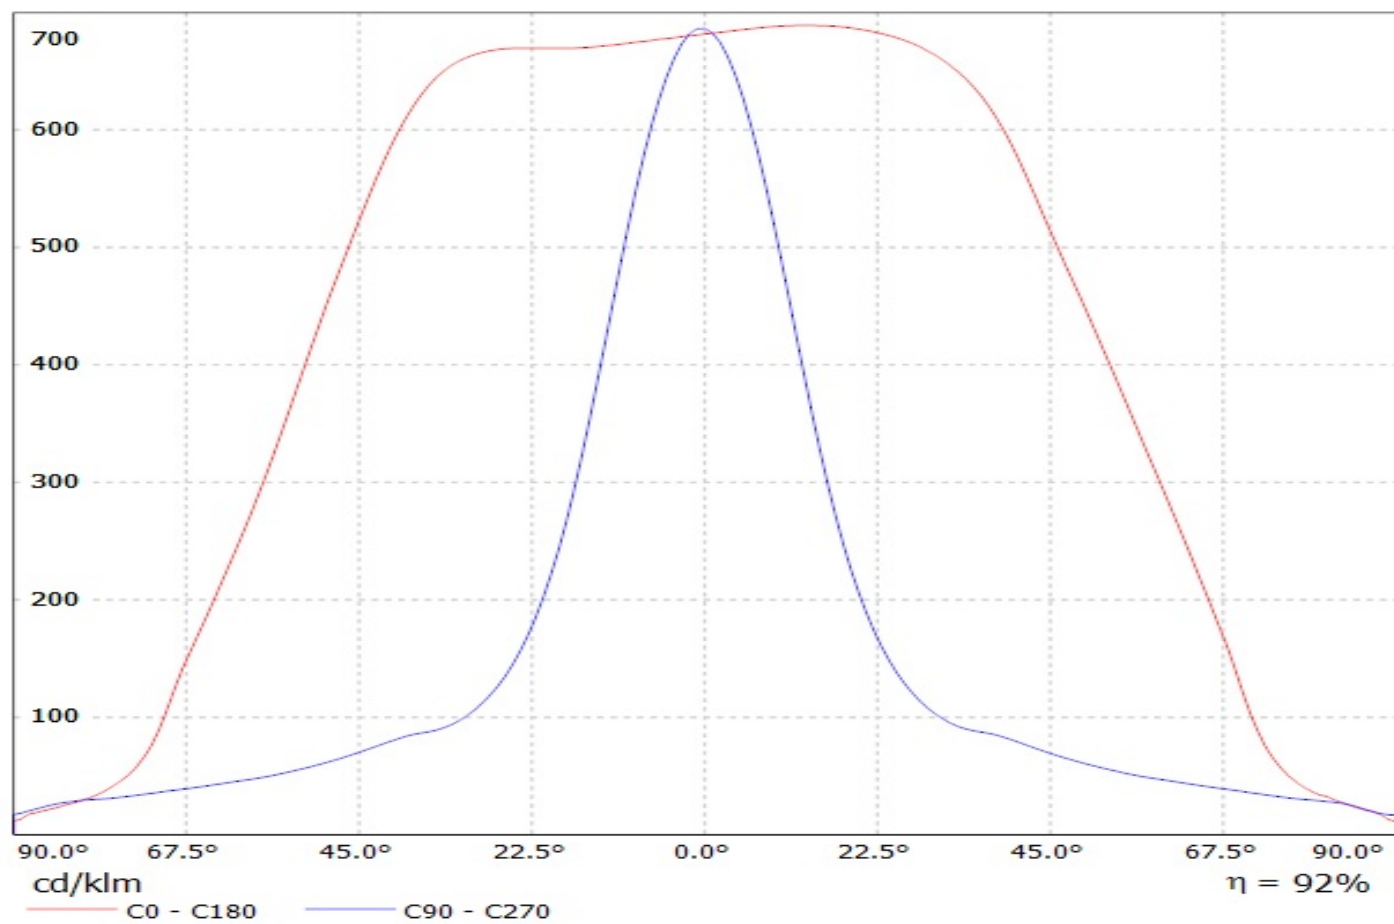


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Oslon_Square_EC)

Lamps: 1 x Osram_Oslon_Square_EC_2x6_(LCW CQAR.EC-MQMS-5R8T-35)_948.673lm@250mA_P=8.85466W_η=0.2498A

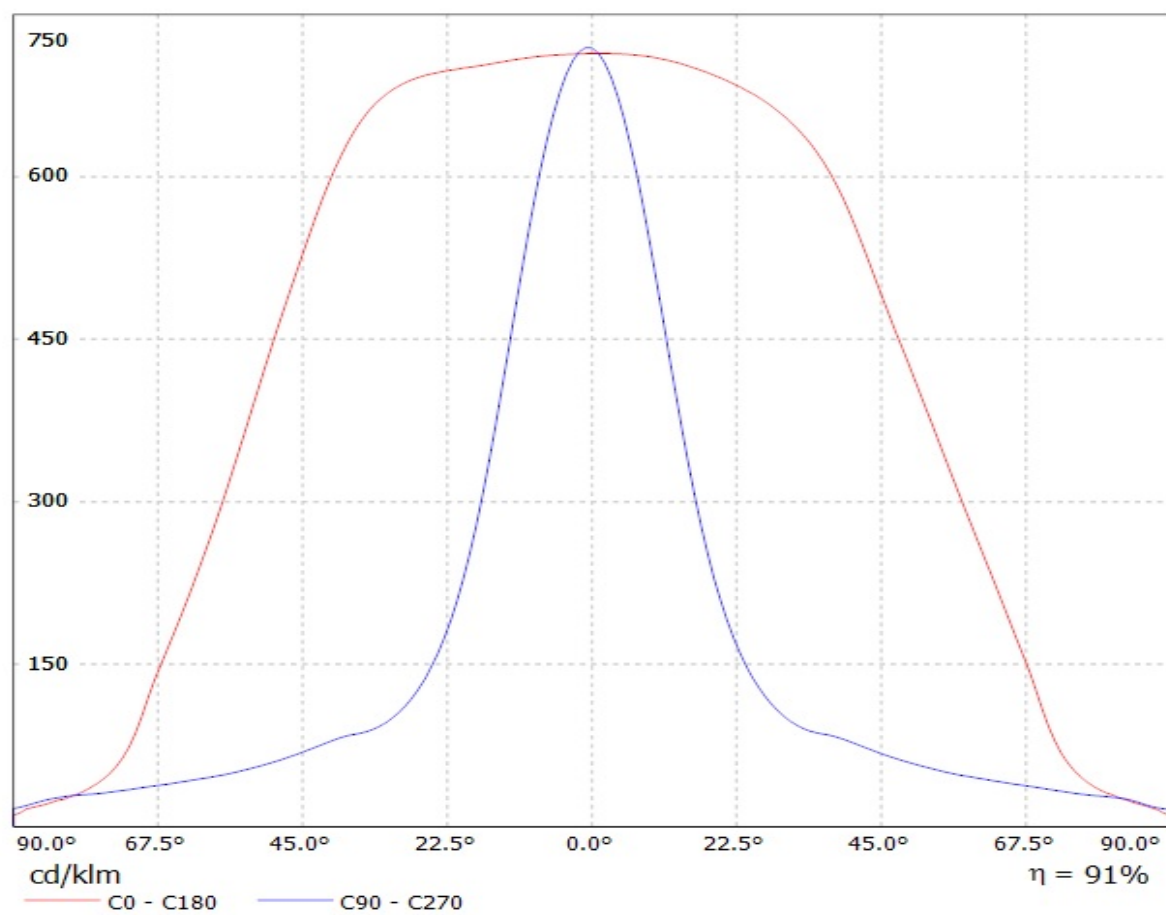


Luminaire: Ledil CS14597_HB-IP-2X6-O_(Duris_S8_2x6)
Lamps: 1 x Duris_S8_2x6_1600.71lm@150mA_P=10.21W_I=0.15A

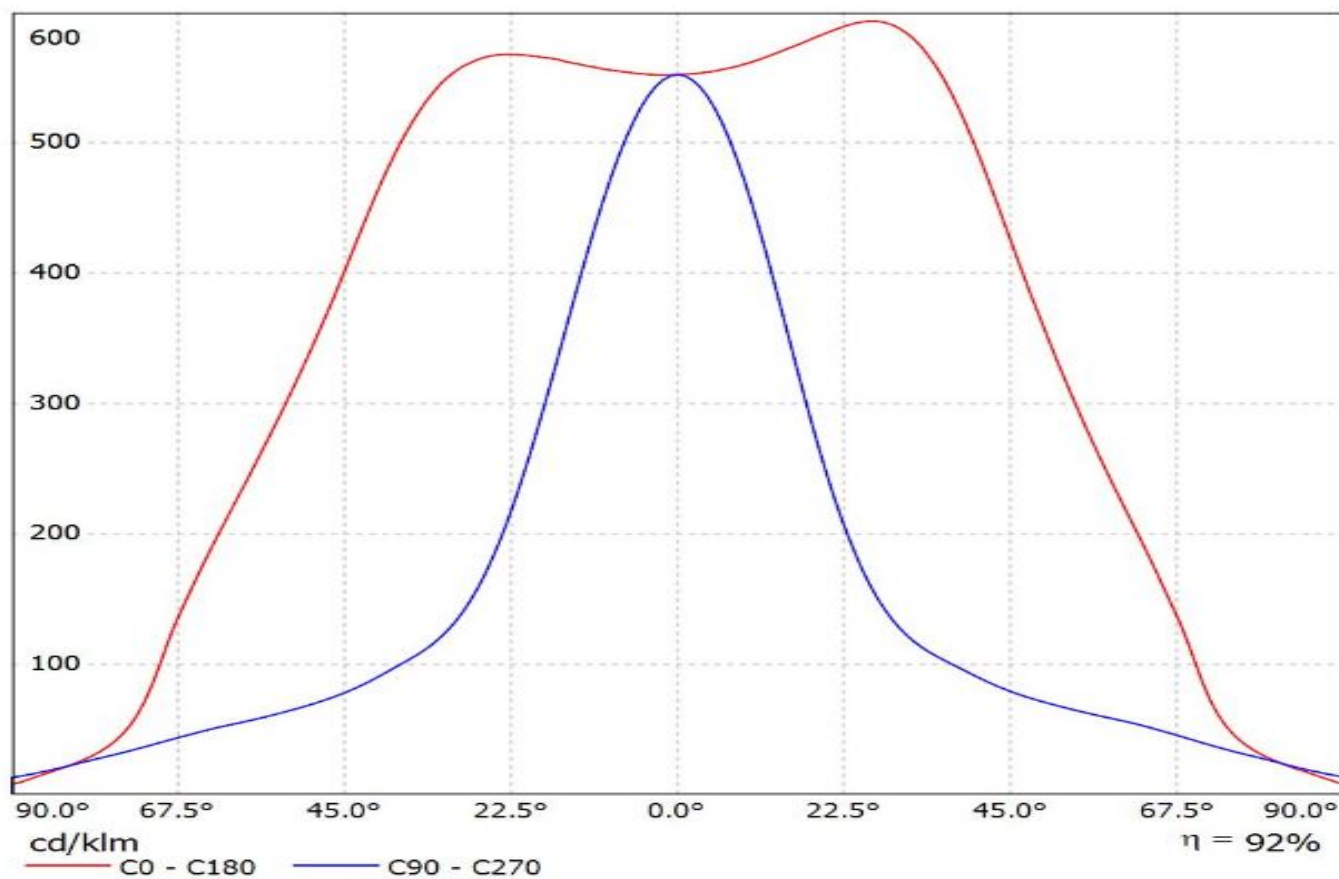


Luminaire: Ledil CS14597_HB-IP-2X6-O_(Square_Gen3)


Lamps: 1 x Osram-Oslon_Square_Gen3_(PM-MUNQ-A737-1)_1311.93lm@250mA_P=8.2362W_I=0.25A

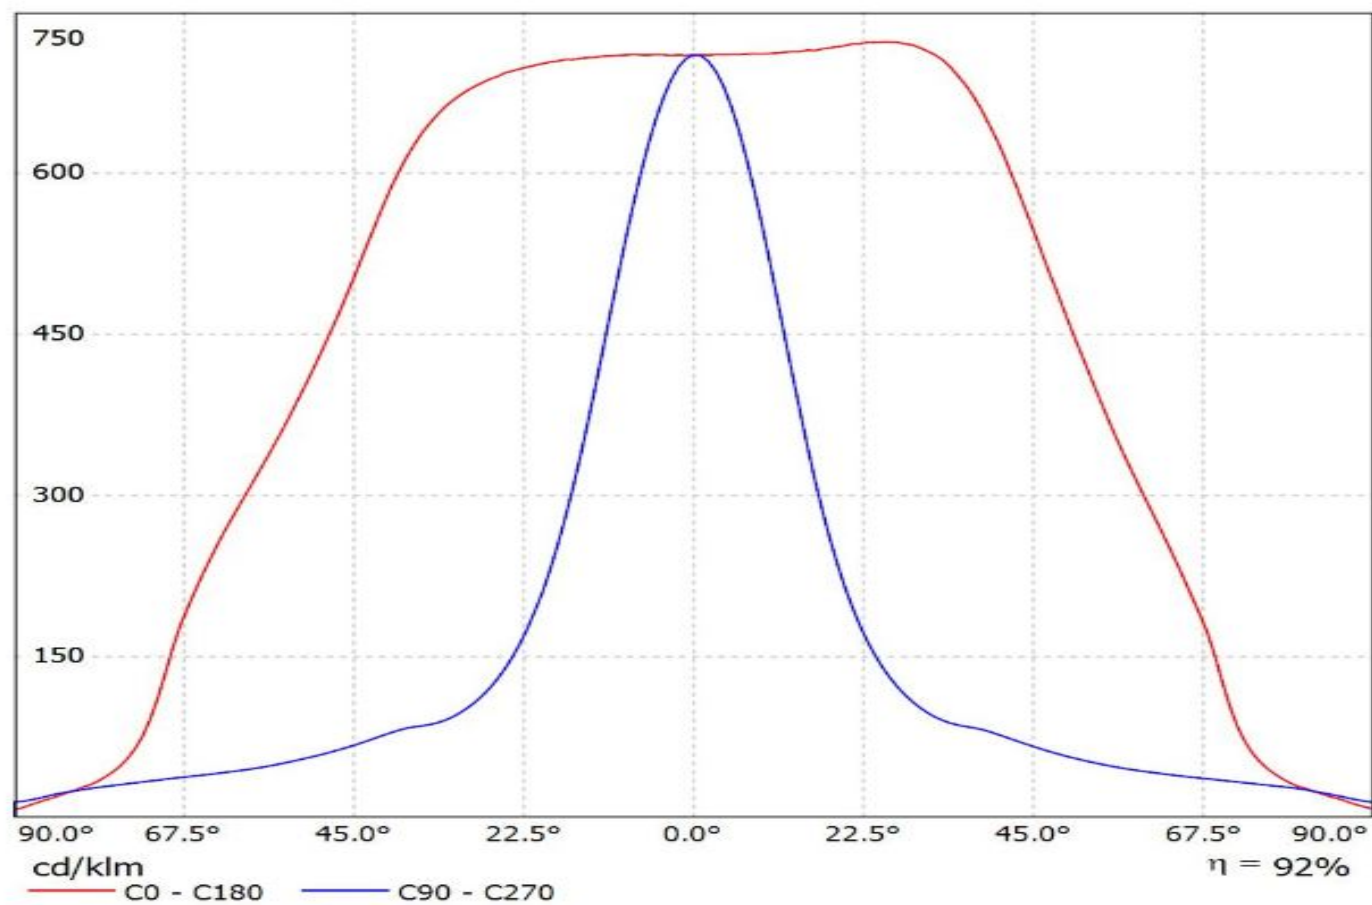


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(SSL80)
Lamps: 1 x SSL80_1292.29lm@250mA_P=8.5574W_I=0.250A

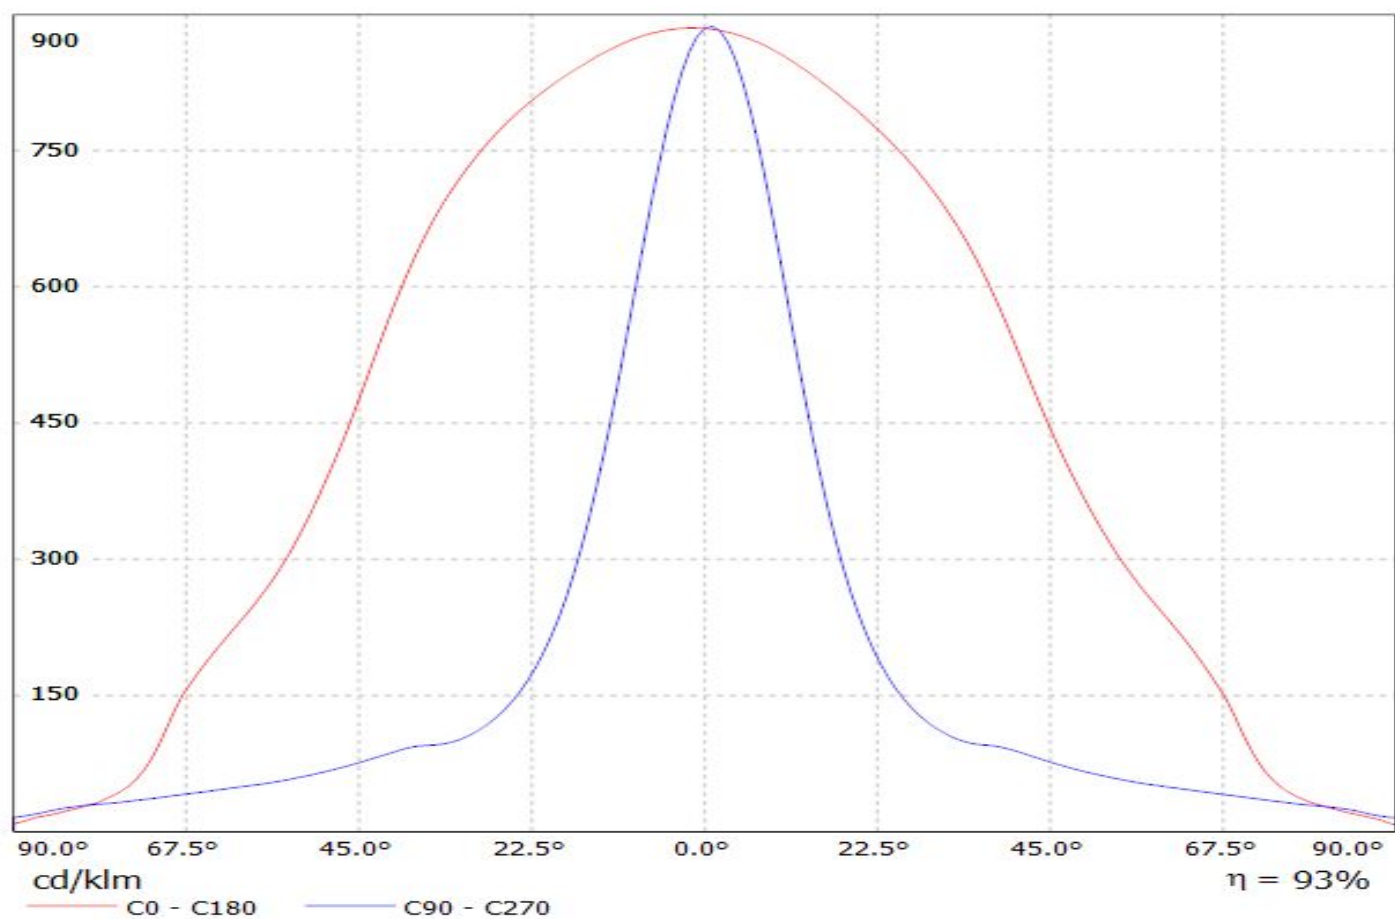


Luminaire: Ledil Oy CS14597_HB-IP-2X6-O_OSRAM_DURIS_P9_SIMULATED
Lamps: 1 x OSRAM DURIS P9

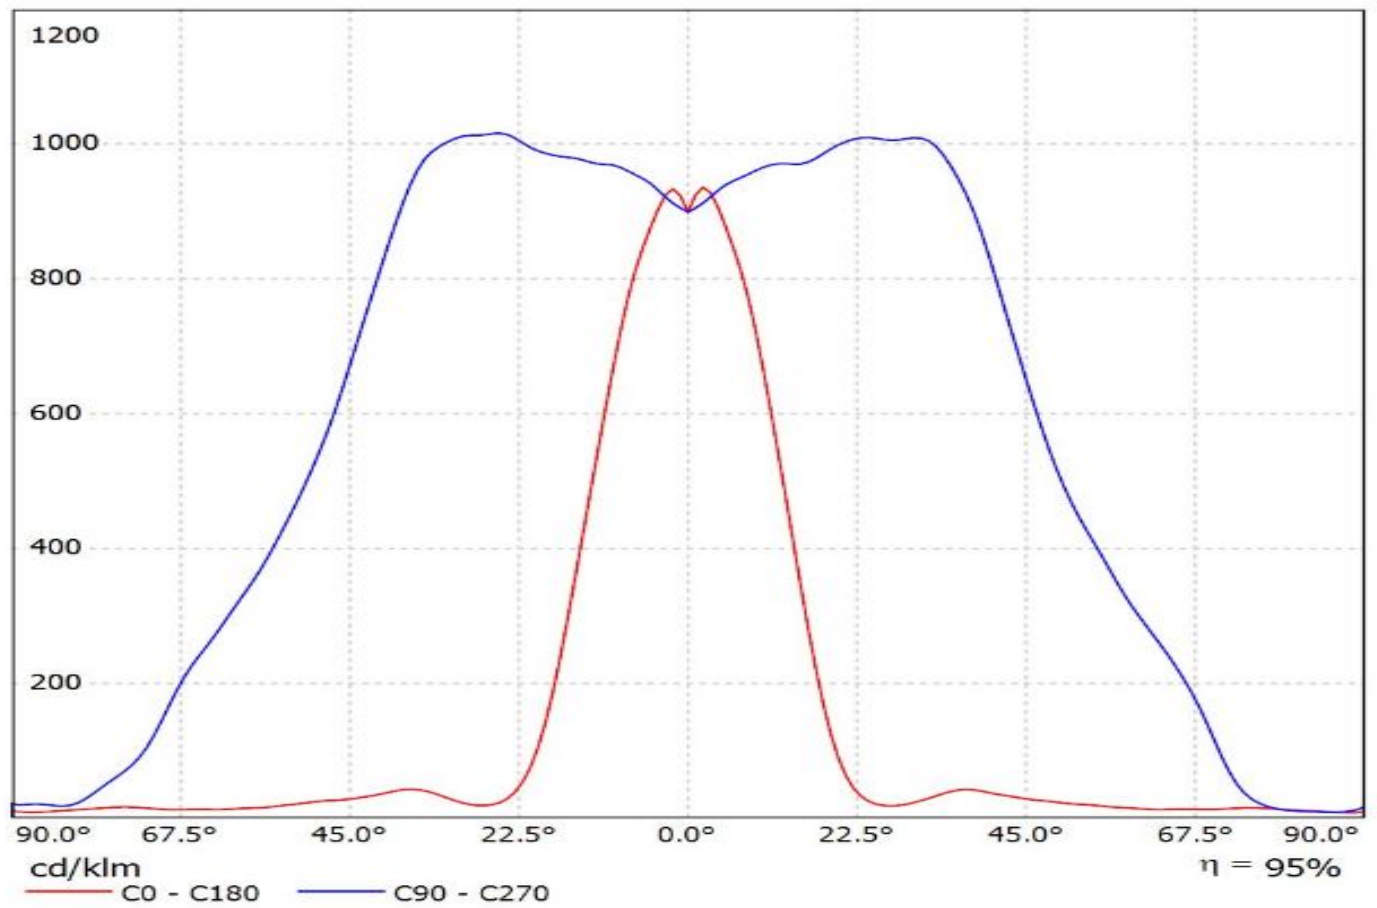

Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_Fortimo FastFlex LED board 2x6 DP G4
Lamps: 1 x Fortimo FastFlex LED board 2x6 DP G4

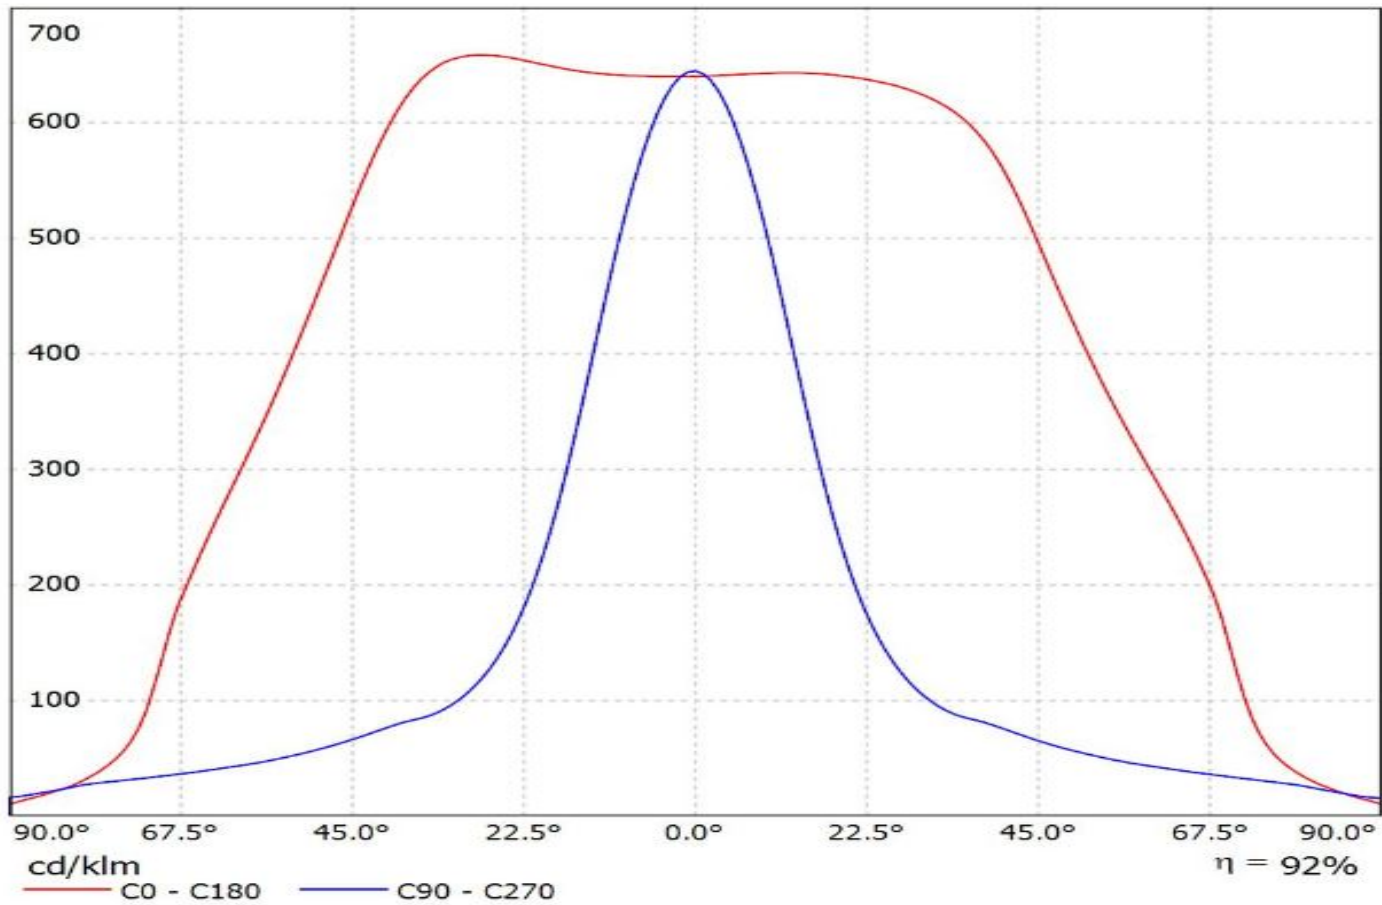


Luminaire: Ledil CS14597_HB-IP-2x6-O_Fortimo FastFlex LED board 2x6 DPX G4
Lamps: 1 x Fortimo FastFlex LED board 2x6 DPX G4

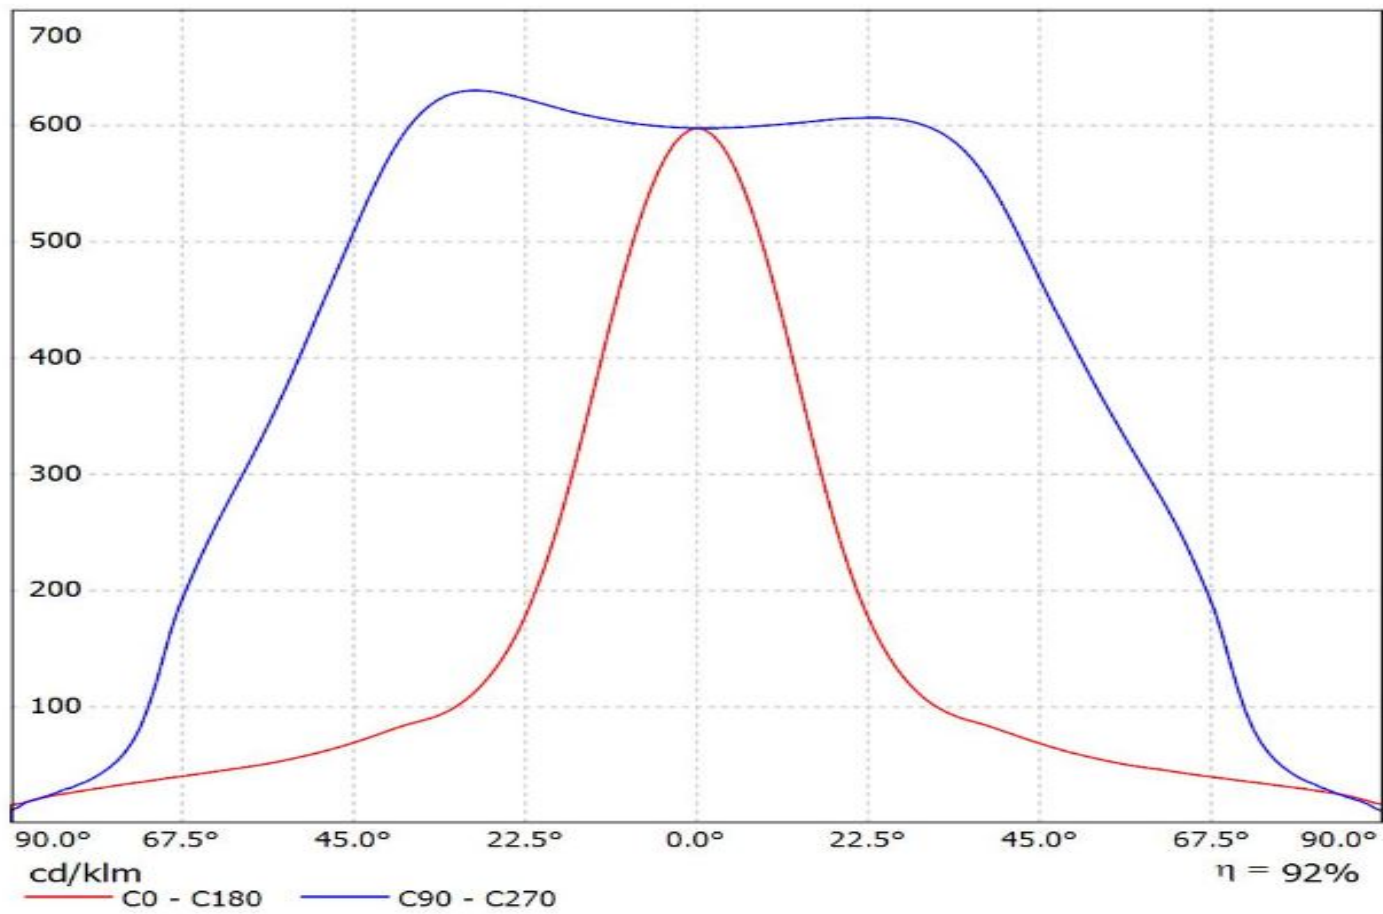


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(LH351Z)

Lamps: 1 x Samsung_LH351Z_(2X6)_951.129lm@250mA_P=8.7495W_I=0.2499A

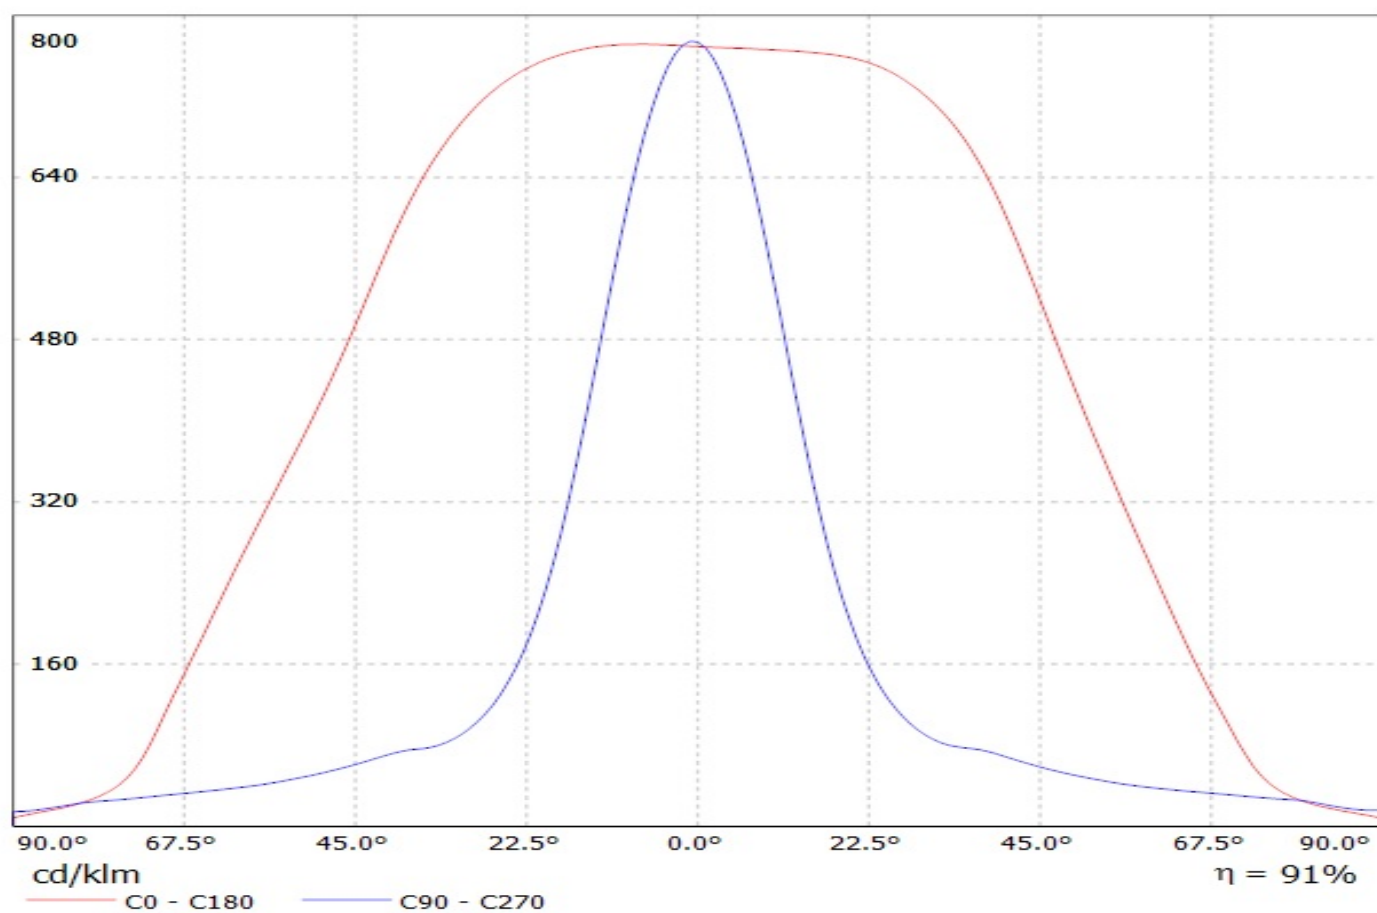


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Z5M1)


Lamps: 1 x Seoul_Z5M1_(2x6)_(SZ5-M1-WW-C8)_1165.11lm@250mA_P=8.58881W_I=0.2499A

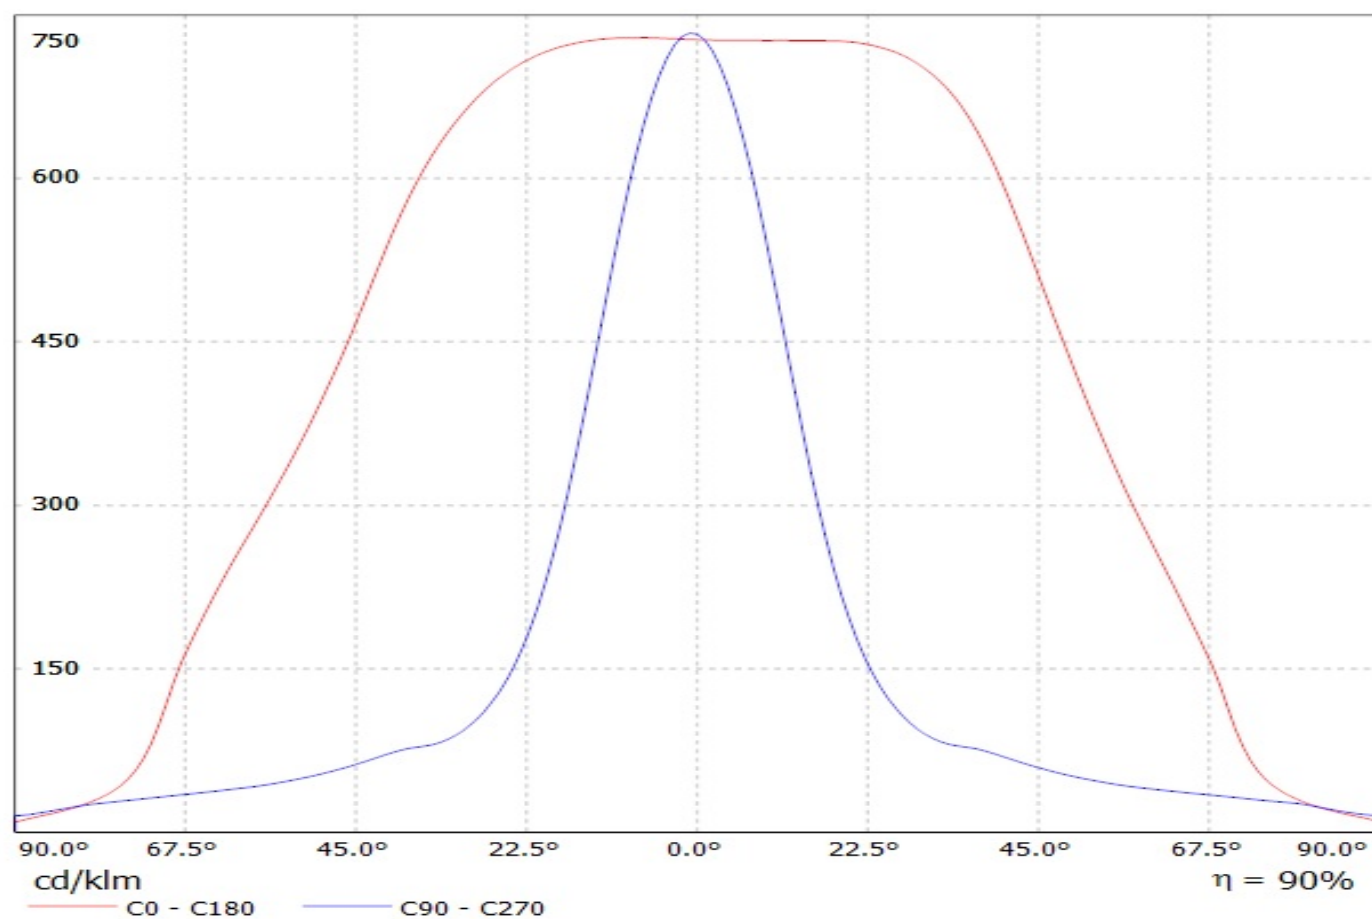


Luminaire: Ledil CS14597_HB-IP-2X6-O_(Z8Y22_PLUS)
Lamps: 1 x Seoul_Z8Y22_PLUS_2X6_(SZ8-Y22-W0-C7P)1489.65lm@250mA_P=8.30675W_I=0.250A

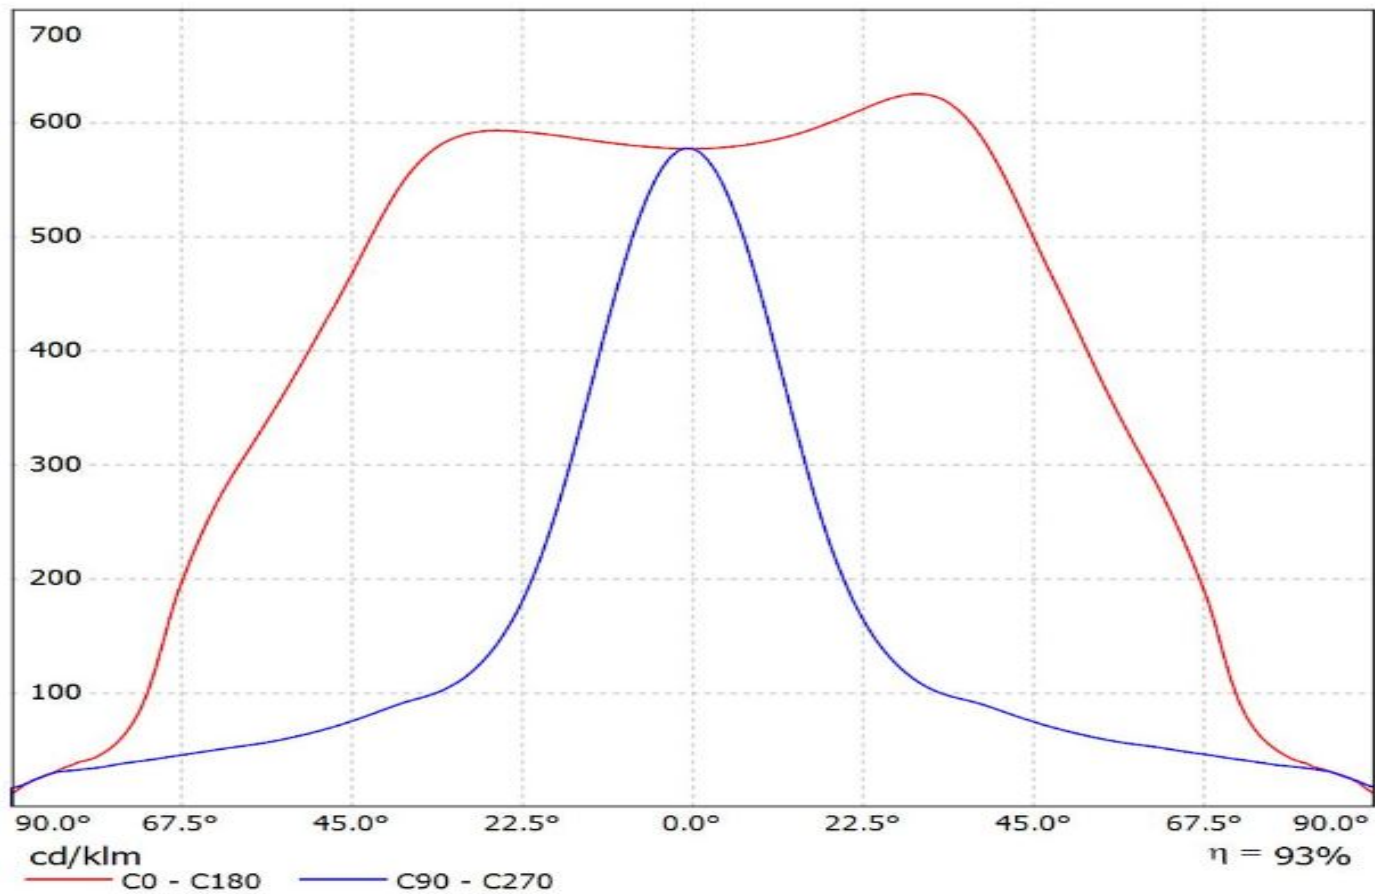

Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(SMJQ-D36W12Mx)
Lamps: 1 x Seoul_SMJQ-D36W12Mx_3765.02@700mA_P=23.6218W_I=0.25A

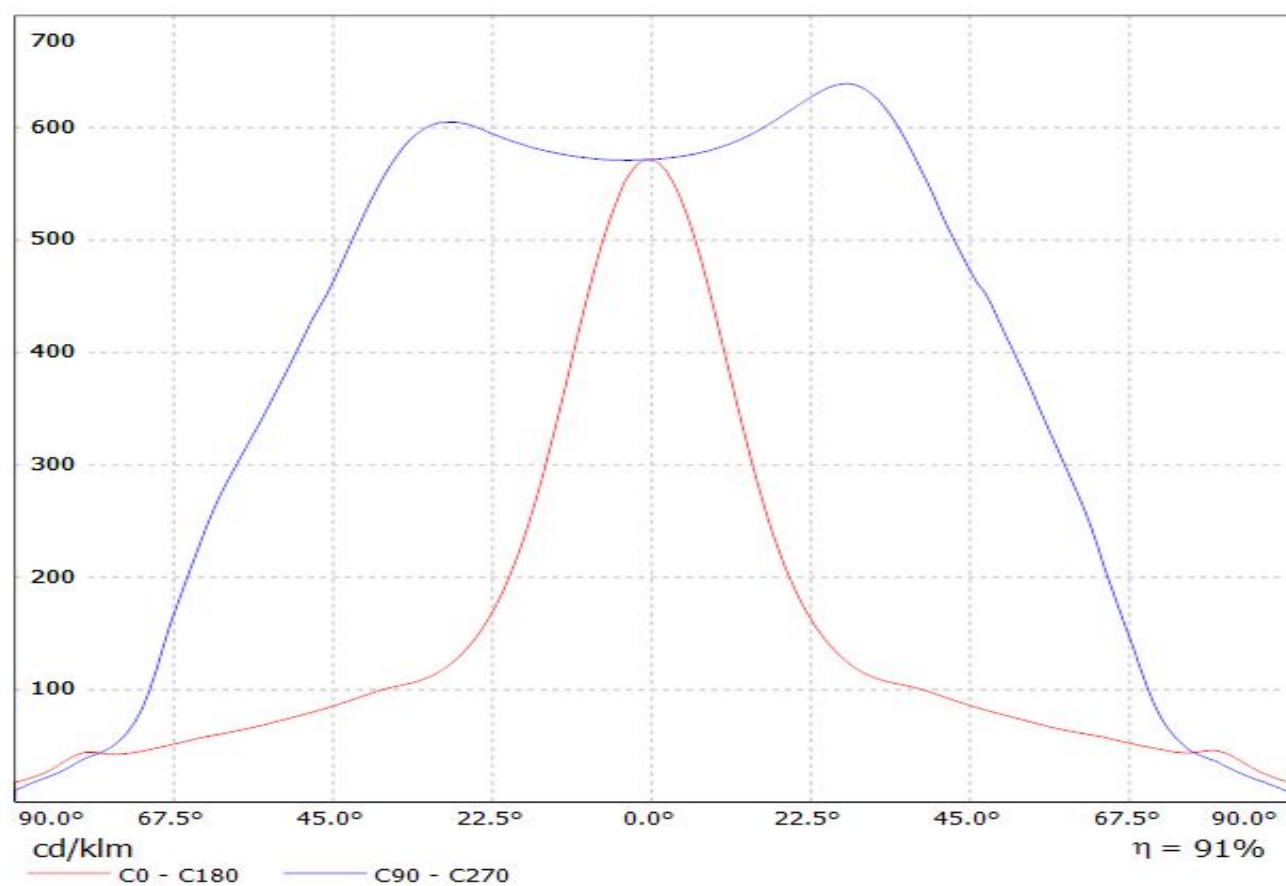


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(SMJQ-D36W12Px)
Lamps: 1 x Seoul_SMJQ-D36W12Px_1404.92lm@250mA_P=8.22866W_I=0.25A

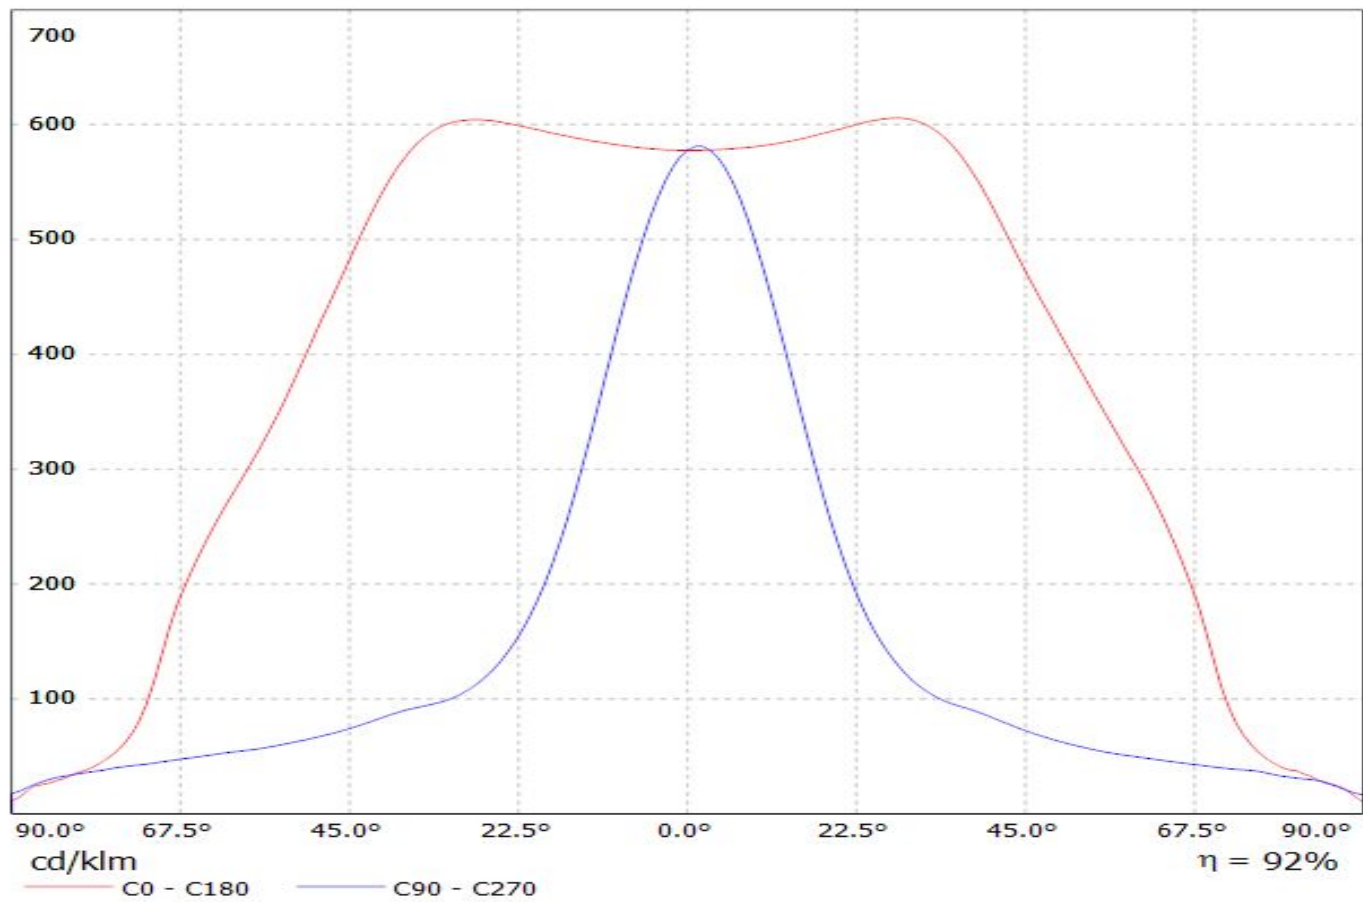

Ledil CS14597_HB-IP-2X6-O_(TL1L4) / LDC (Linear)


Luminaire: Ledil CS14597_HB-IP-2X6-O_(TL1L4)

Lamps: 1 x Toshiba_TL1L4_2x6_(TL1L4-DW0)_1346.96lm@250mA_CCT=6500K_P=8.5W_I=0.25A

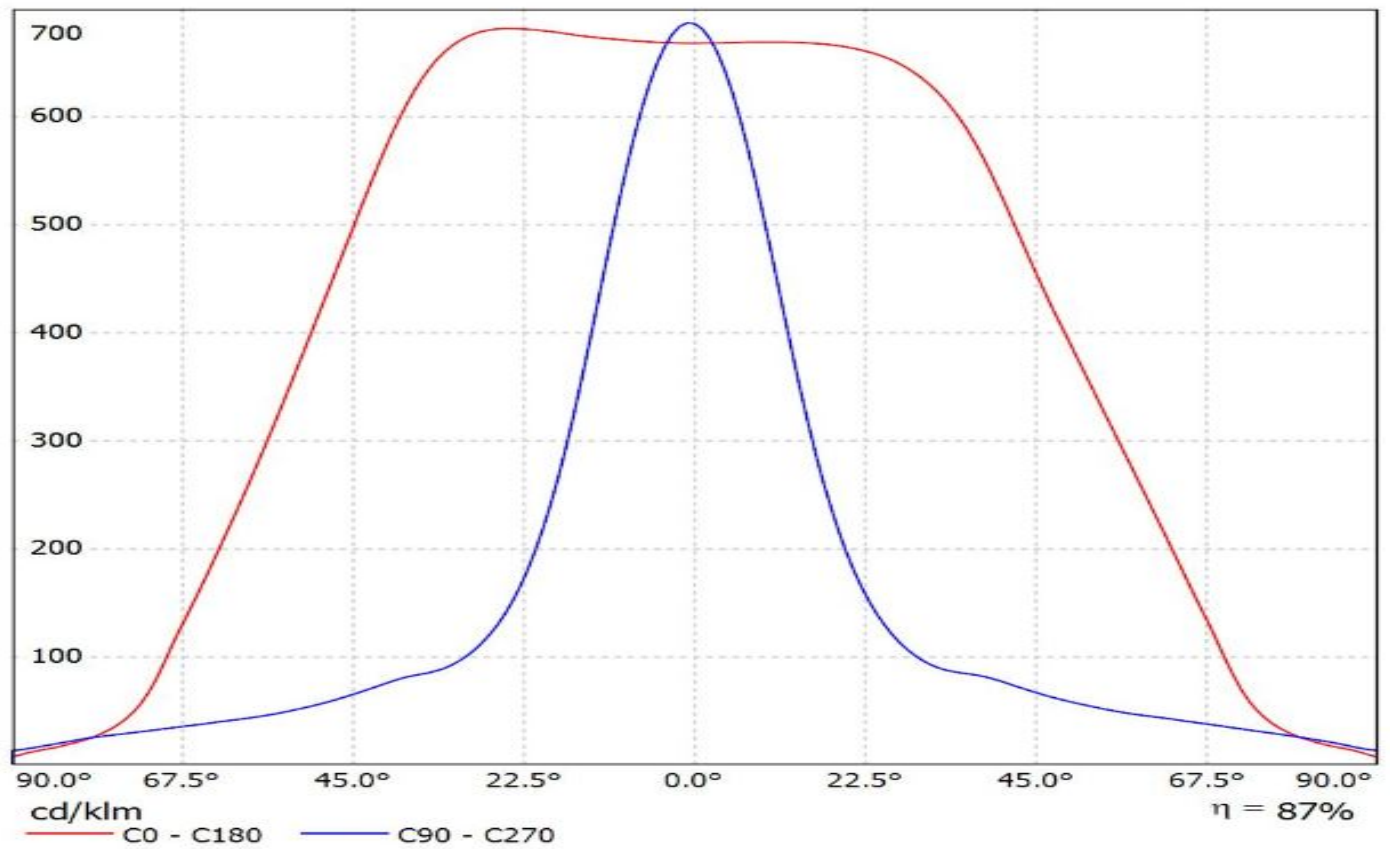


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(XM-L)

Lamps: 1 x Cree_XM_L_2x6_(XMLAWT-00-0000-000LT2OE7)_995.915lm@250mA_P=8.16796W_I=0.2498A

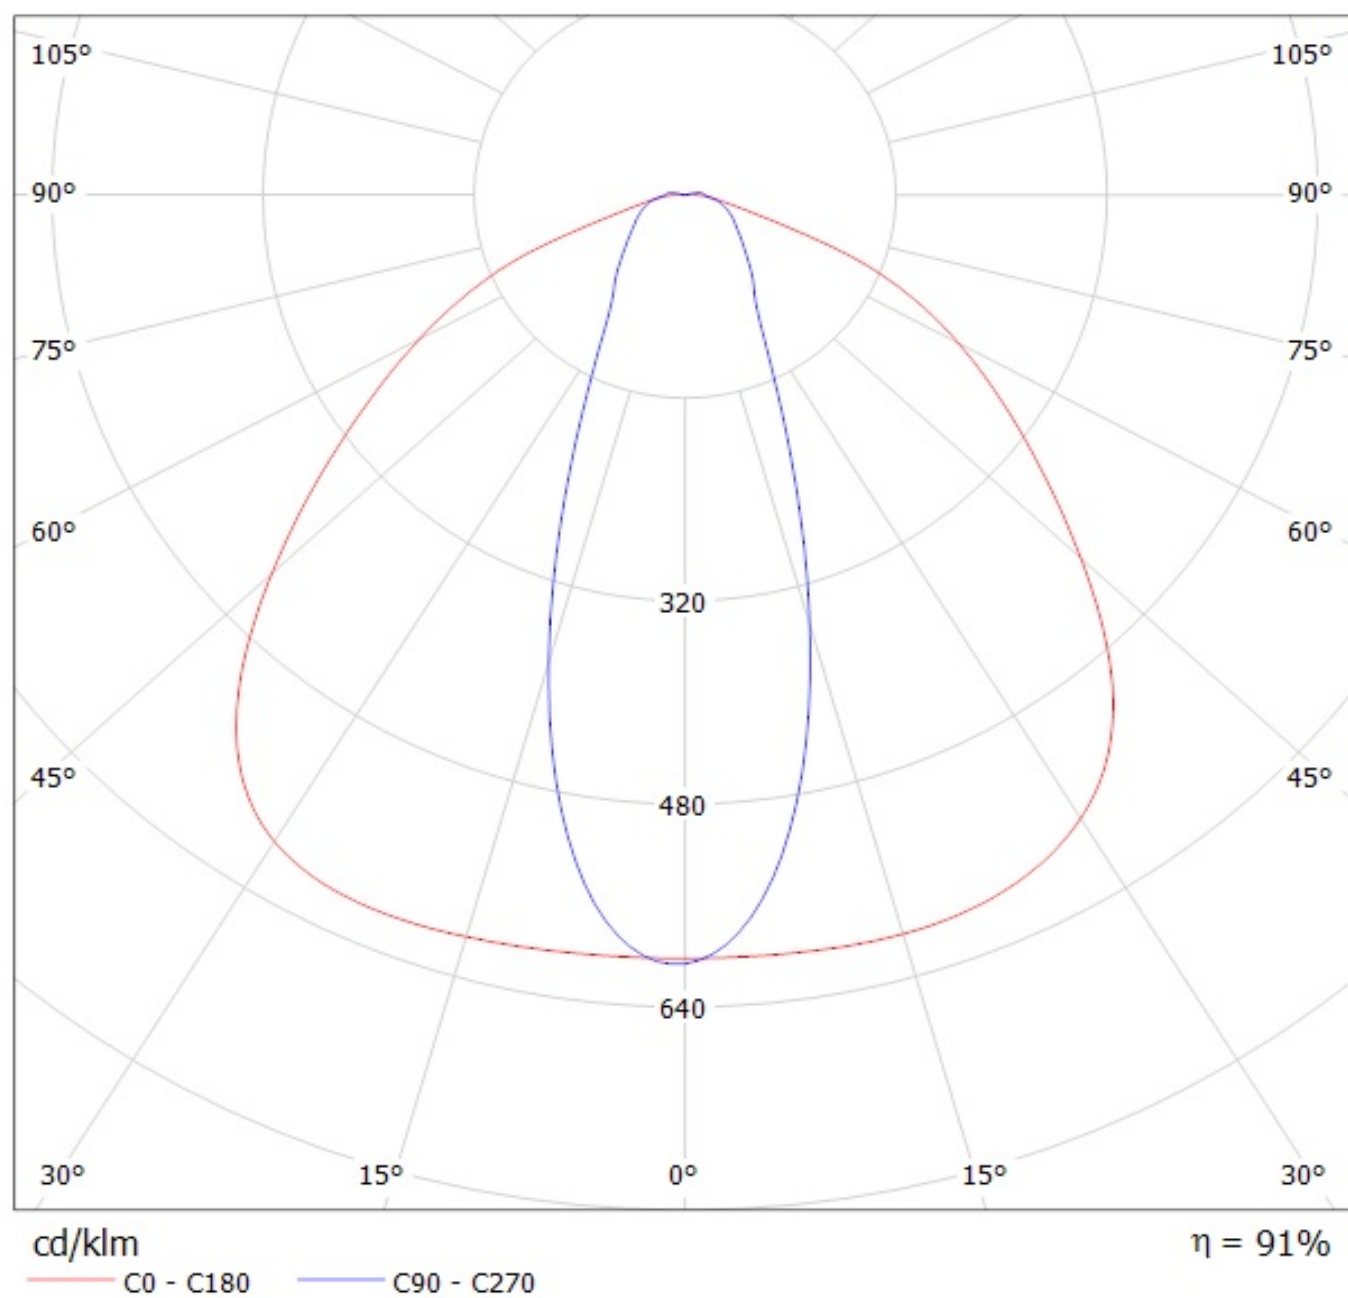


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(XP-G2)

Lamps: 1 x Cree_XP-G2_2x6_1237.61lm@250mA_P=8.57988W_I=0.2498A

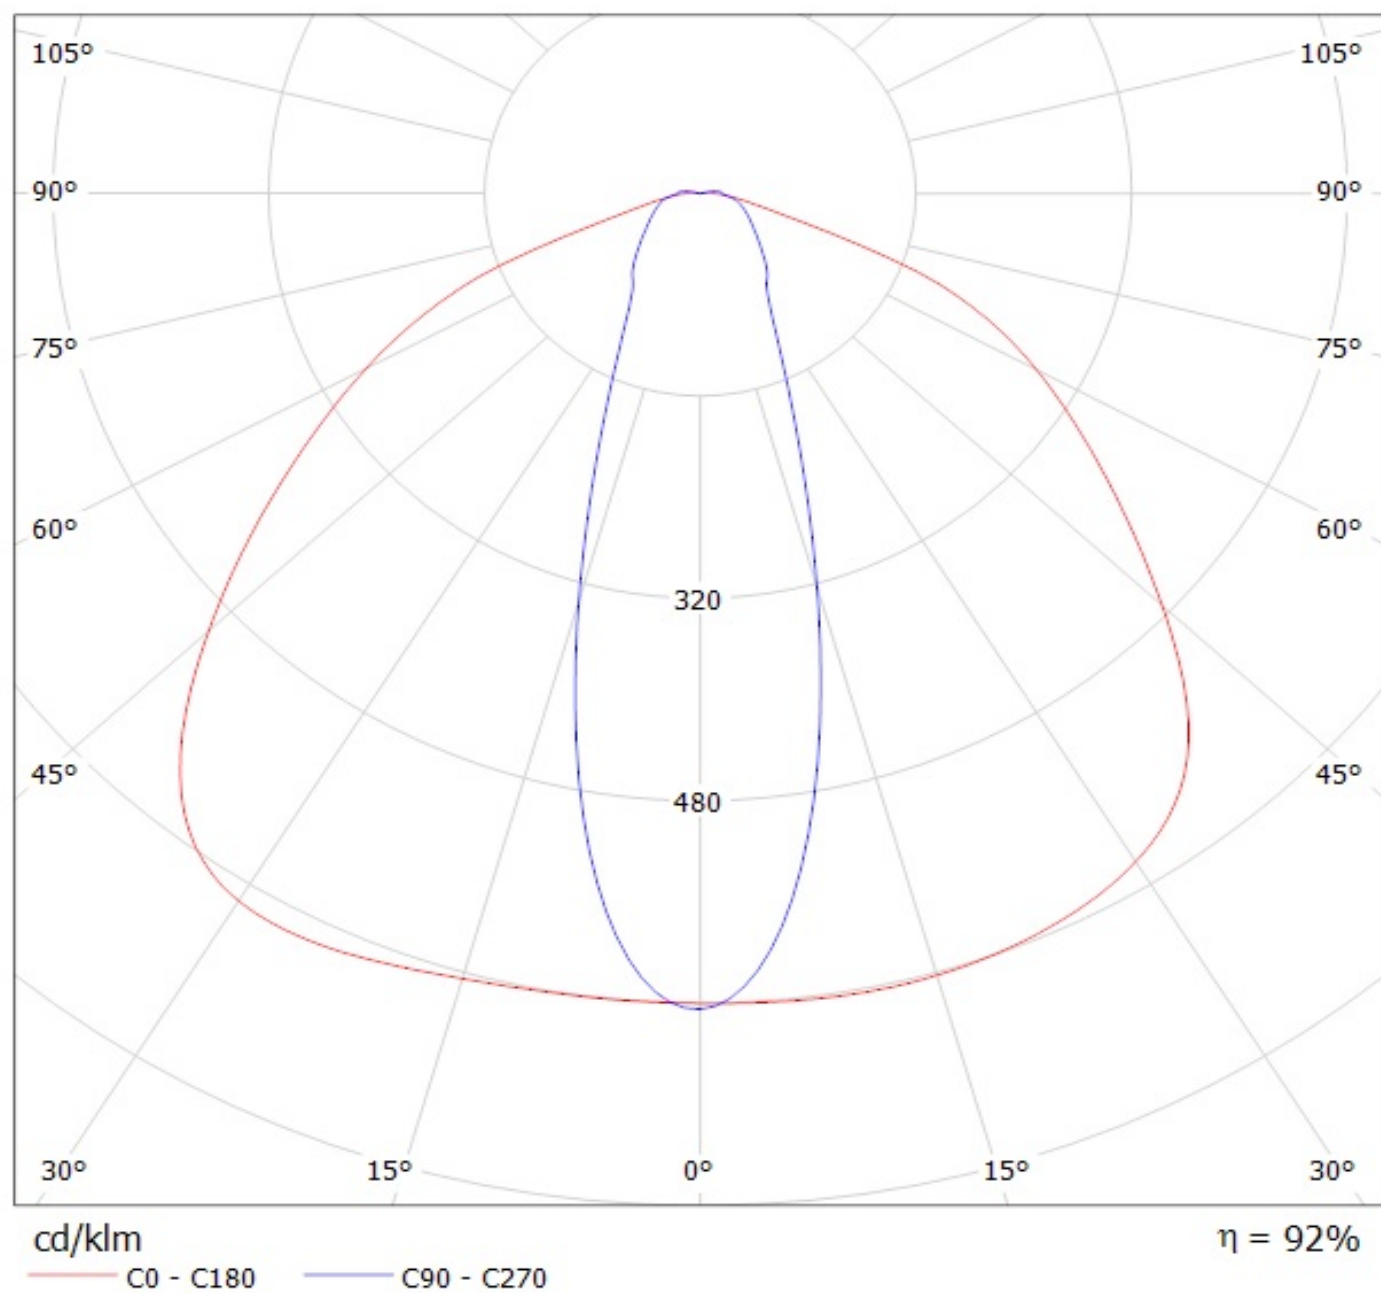


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(XP-G)

Lamps: 1 x Cree_XP-G_2x6_779.527lm@250mA_P=8.54416W_I=0.2498A

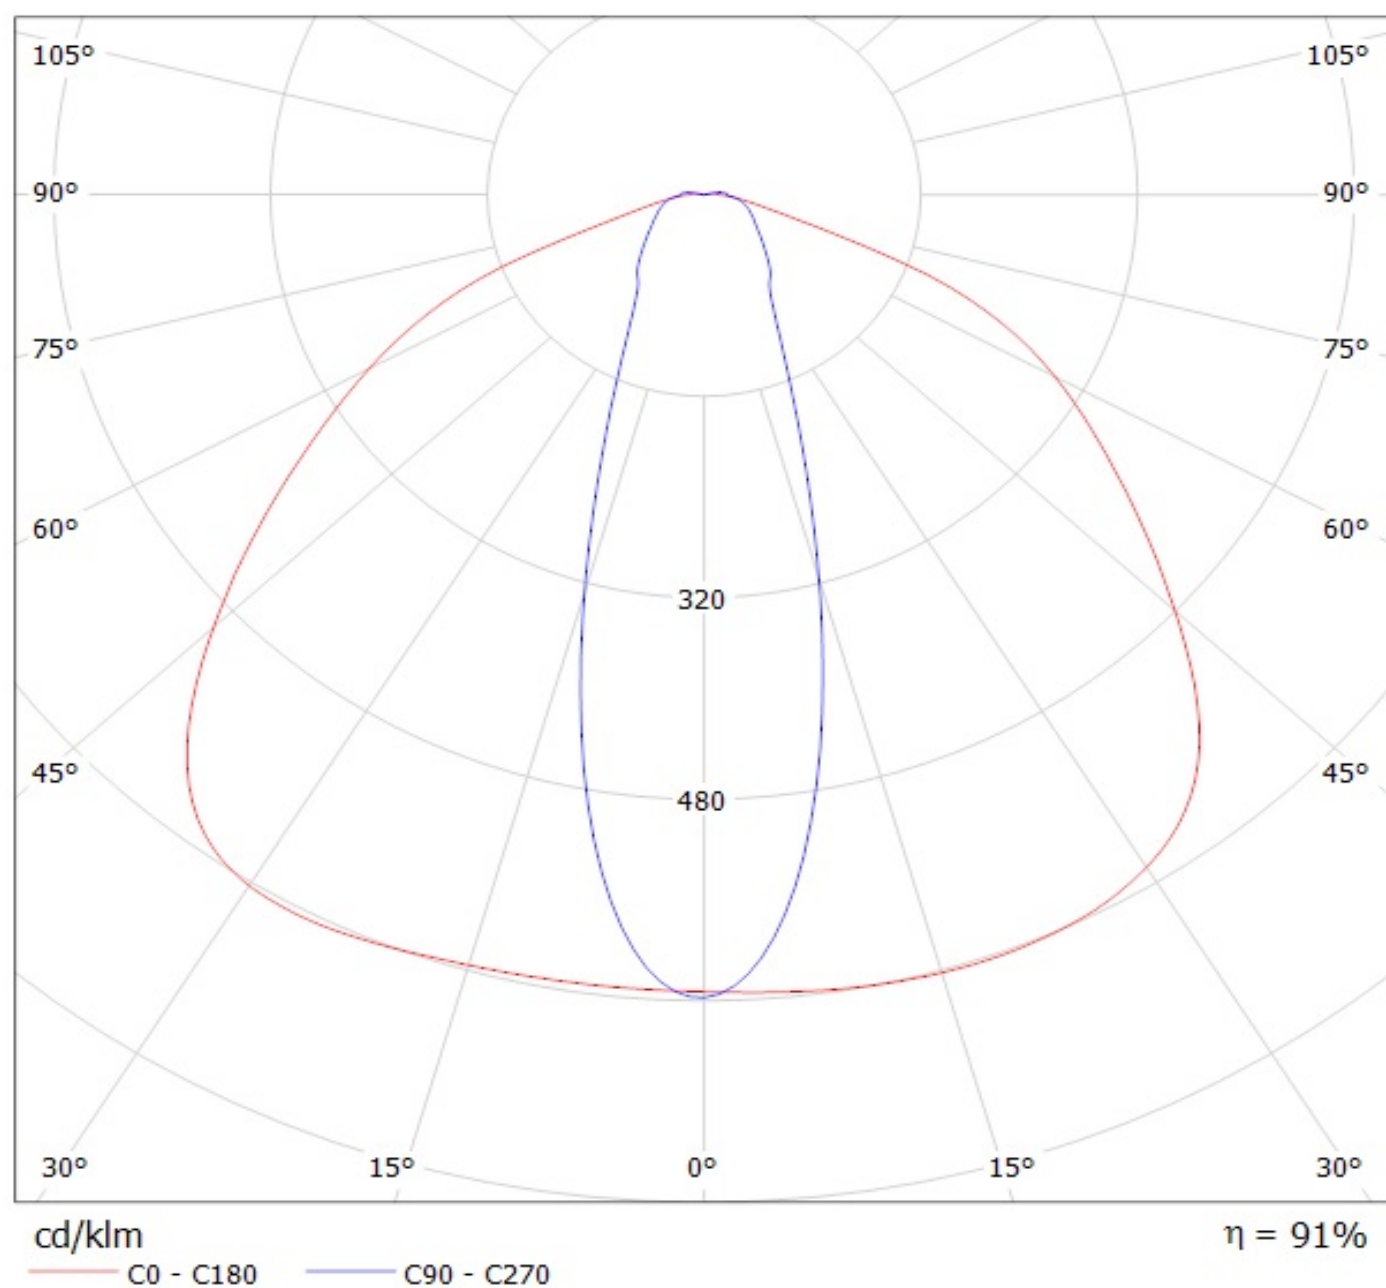


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(XT-E)

Lamps: 1 x Cree_XT-E_2x6_1235.9lm@250mA_P=8.88264W_I=0.2498A

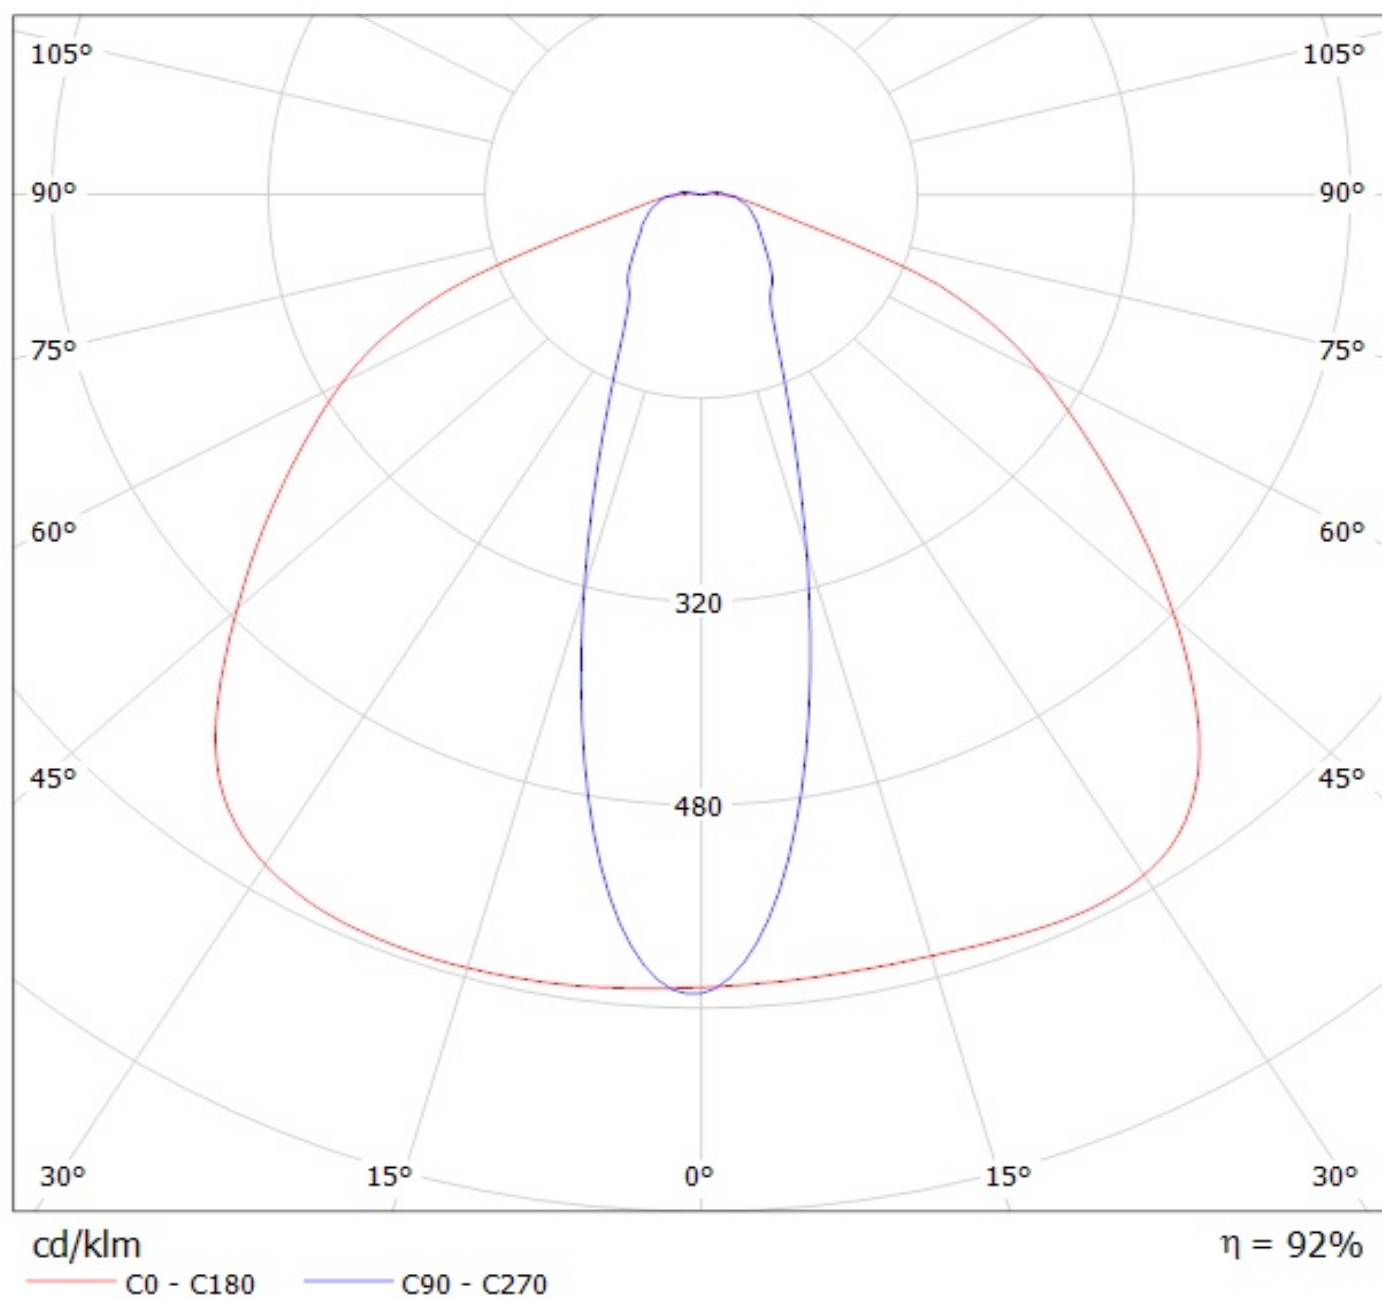


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(XM-L2)

Lamps: 1 x Cree_XM-L2_(XMLBWT-00-0000-000LT30E7)_1173.92lm@250mA_P=8.28212W_I=0.2498A

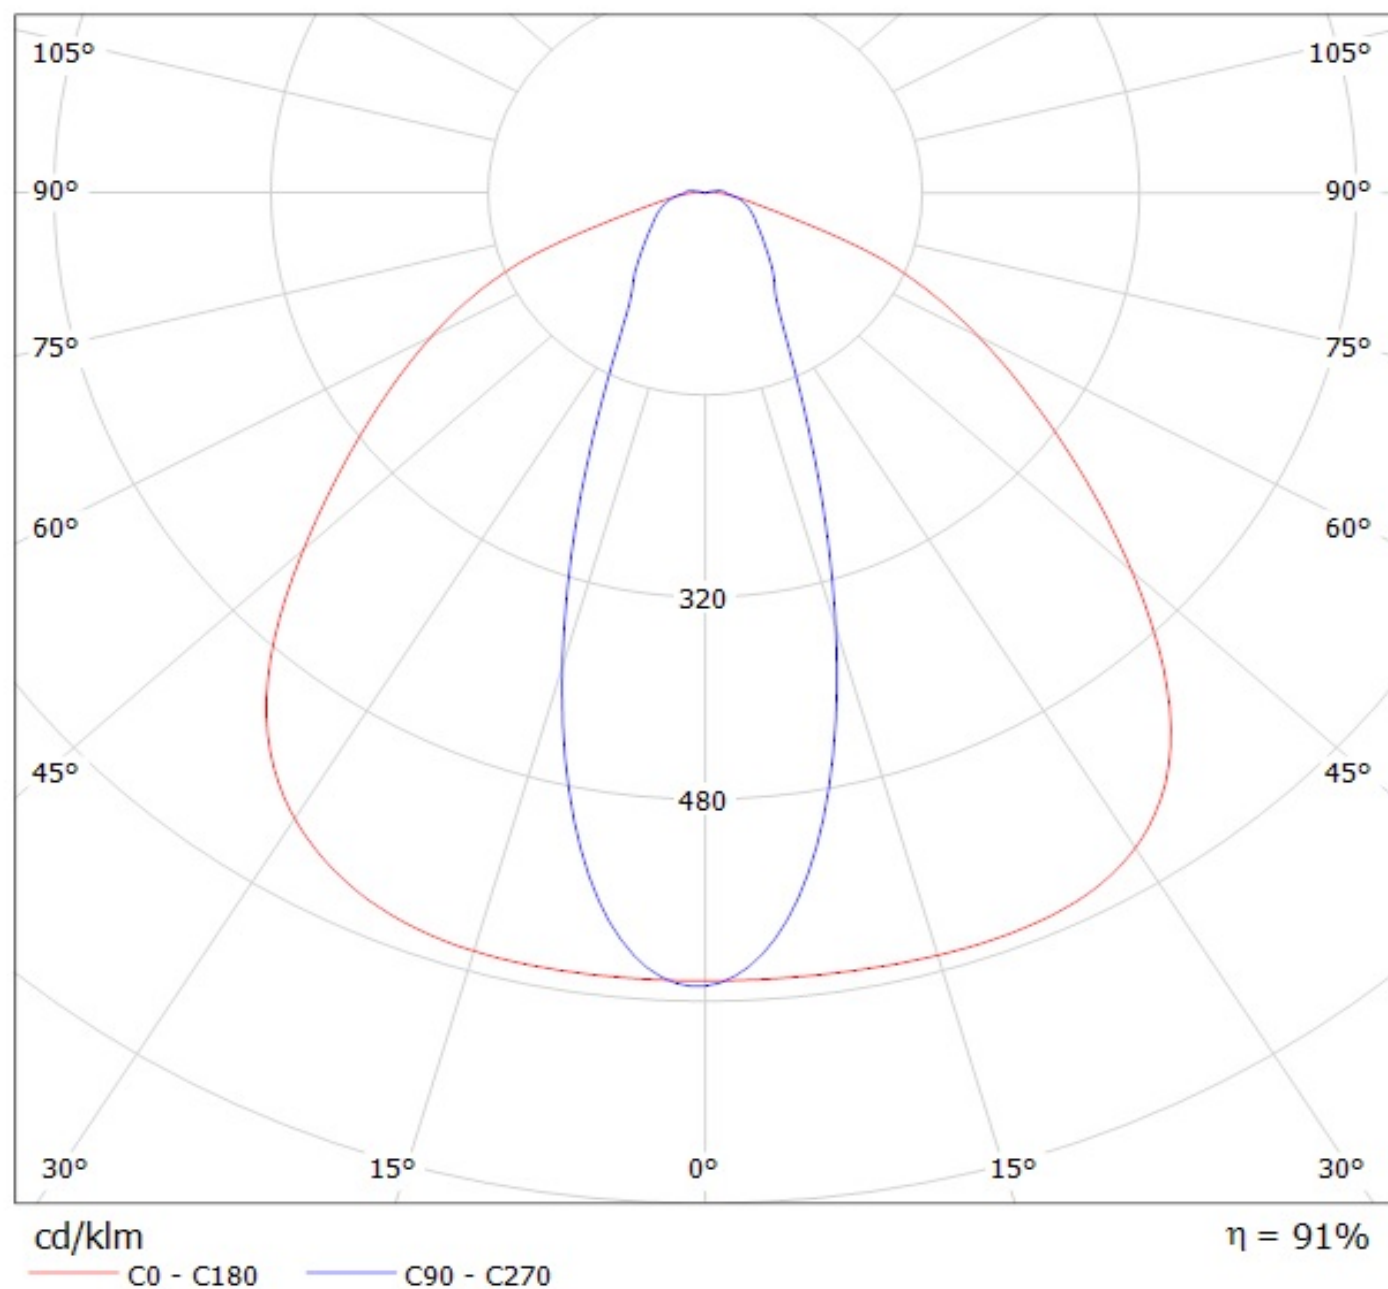


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(XP-L)

Lamps: 1 x Cree_XP-L_2x6_1243.45lm@250mA_P=8.25764W_I=0.2498A

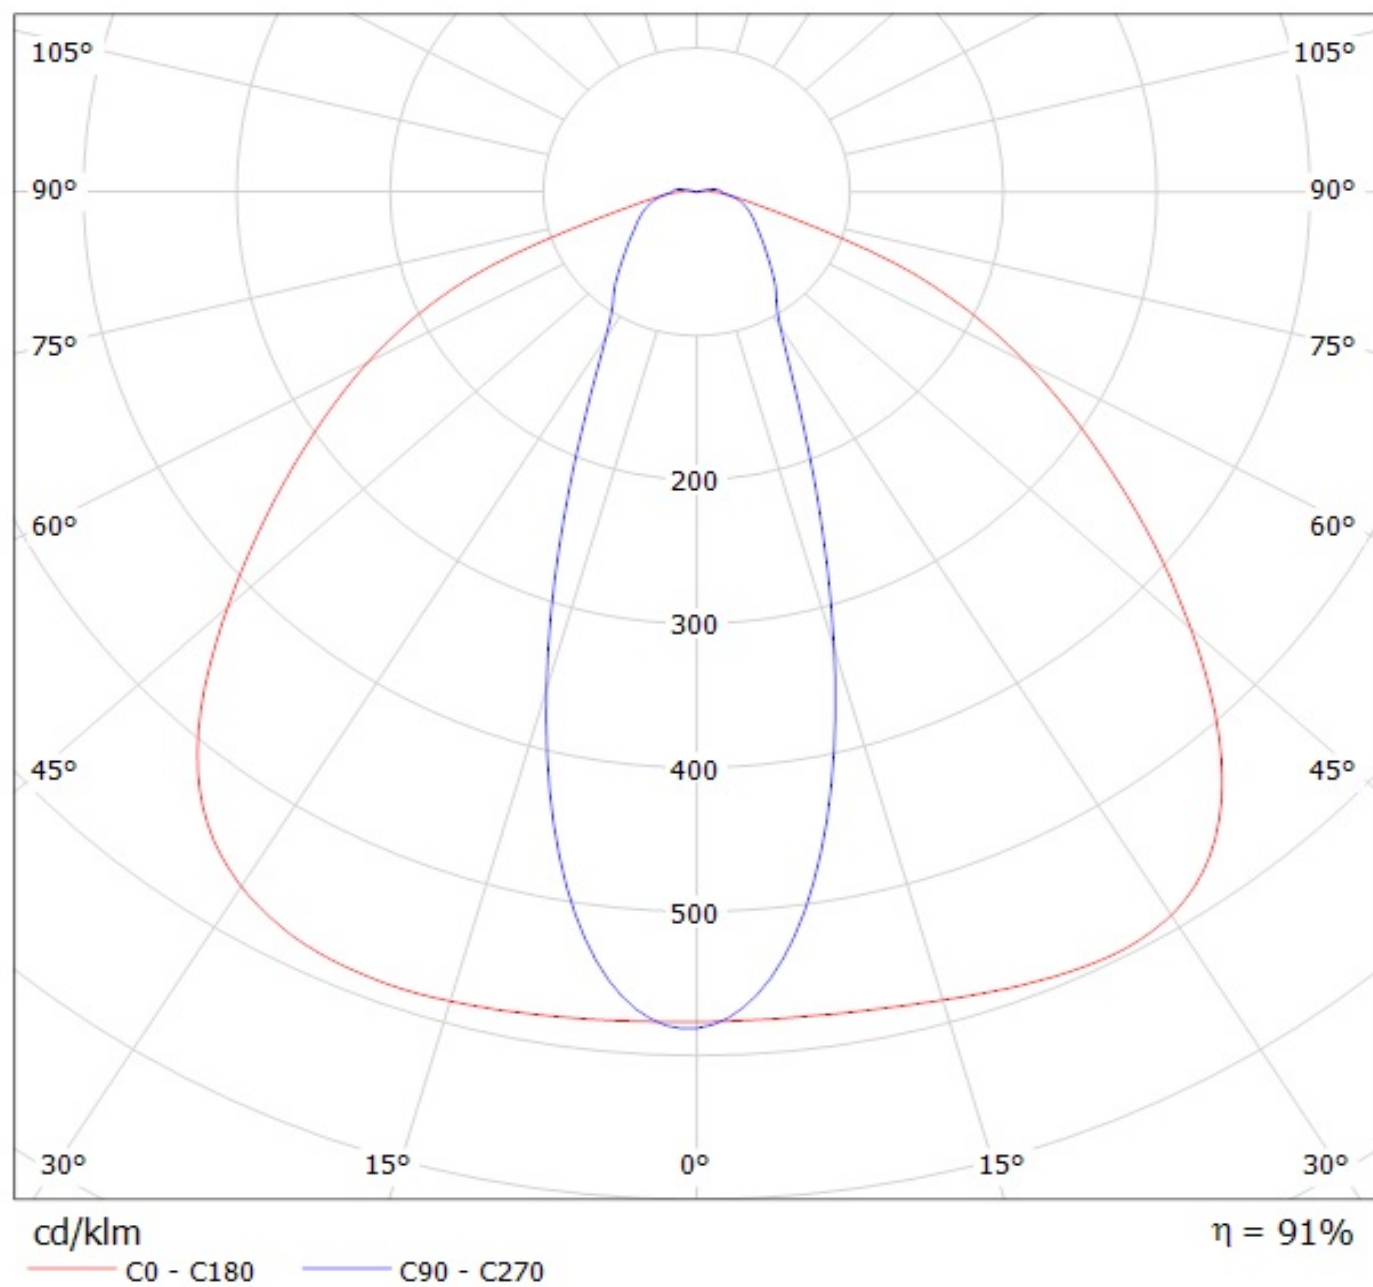

Luminaire: Ledil CS14597_HB-IP-2x6-0_(XP-G3)

Lamps: 1 x Cree_XP-G3_6x2_(XPGDWT-B1-6C1-S3-0-01)_1521.26lm@250mA_P=8.253W_I=0.25A

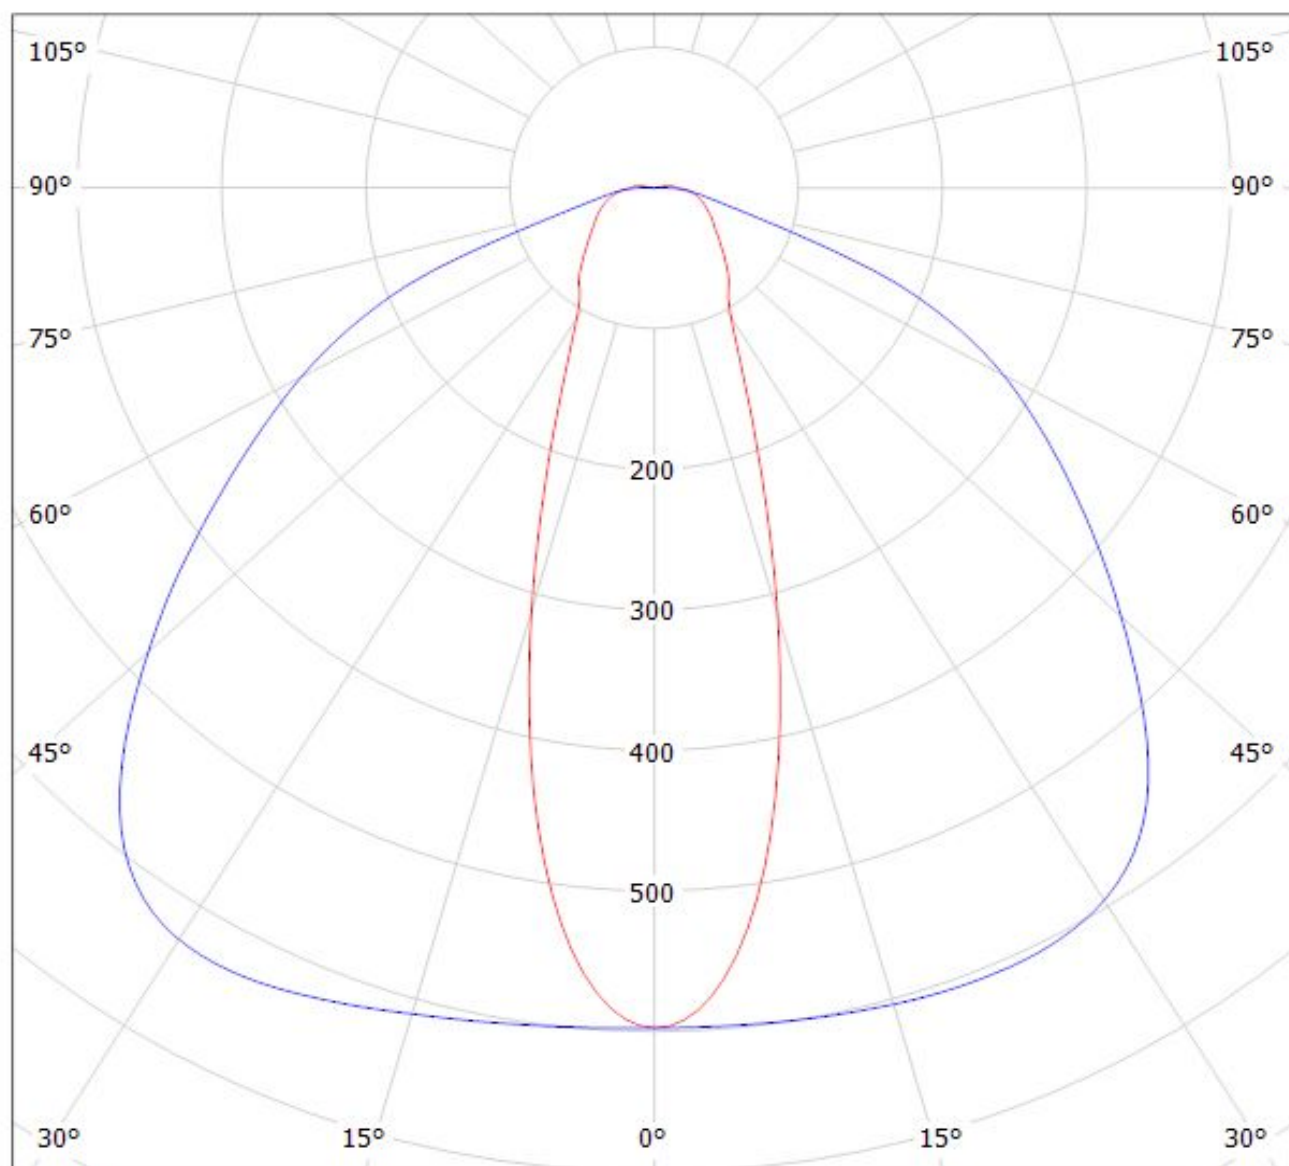


cd/klm

$\eta = 92\%$


— C0 - C180

— C90 - C270

Luminaire: Ledil CS14597_HB-IP-2X6-O_(XP-L2)
Lamps: 1 x Cree_XP-L2x12_(XPGBWT-H1-3B0-R5-0-01)
1666.32lm@250mA_CCT=5000_P=8.239W_I=0.25A

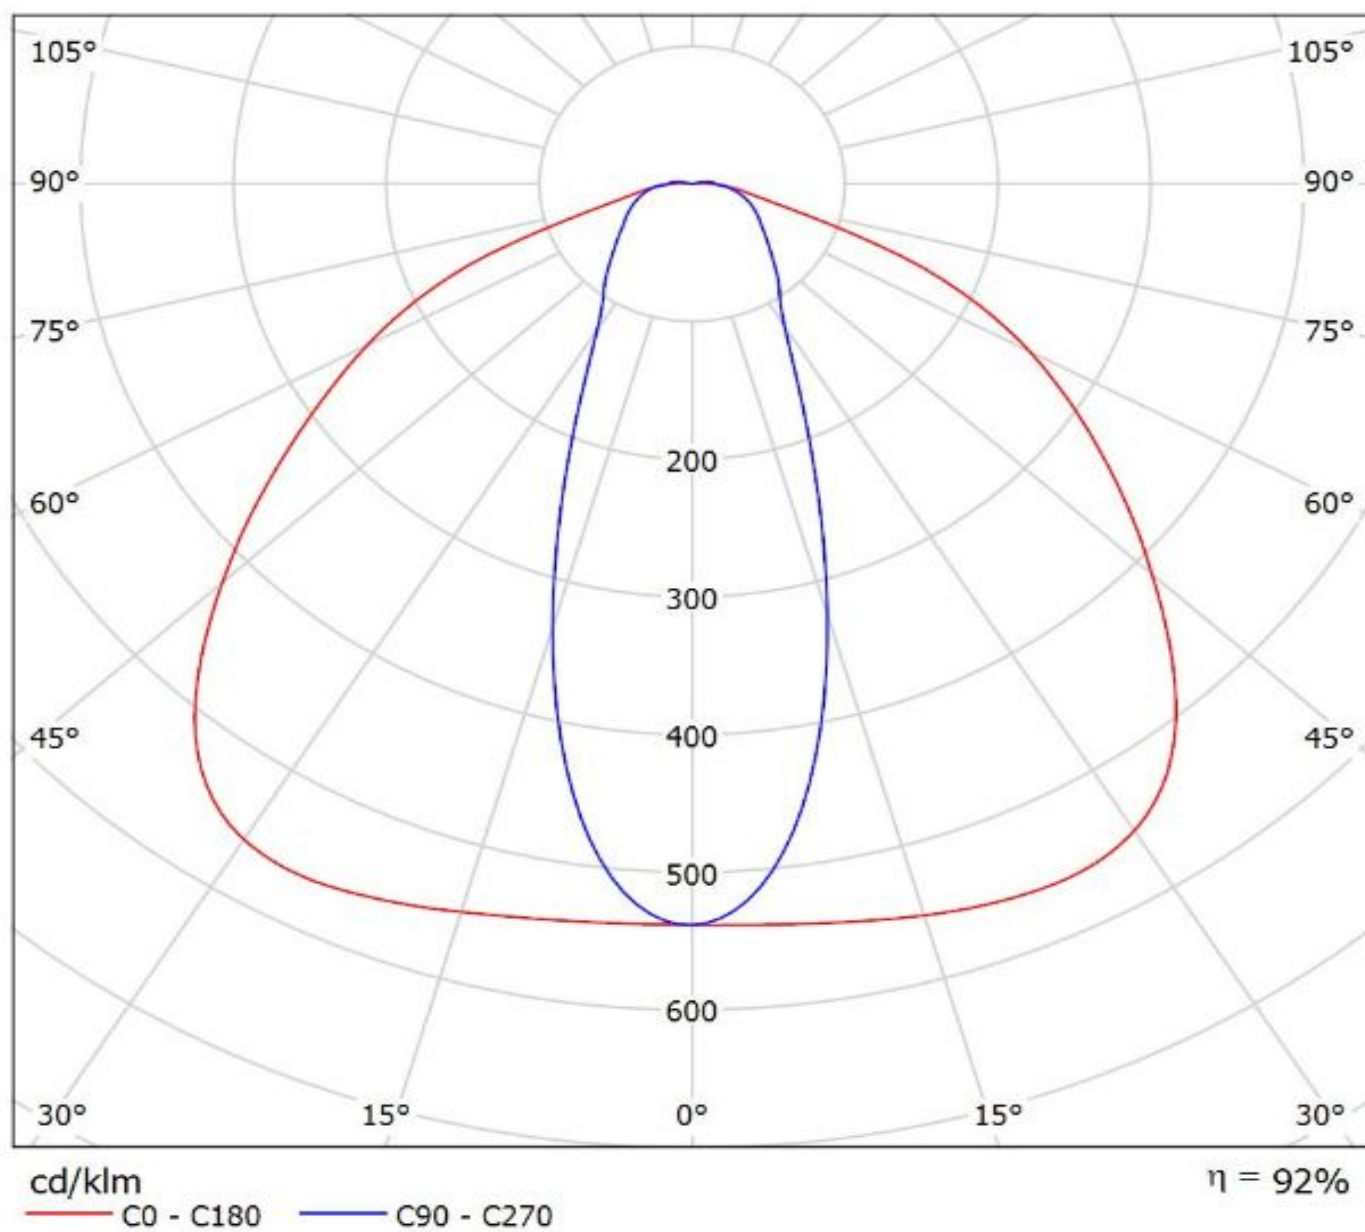


Luminaire: Ledil Oy CS14597_HB-IP-2X6-O_(H35C1)_SIMULATED
Lamps: 1 x LG H35C1

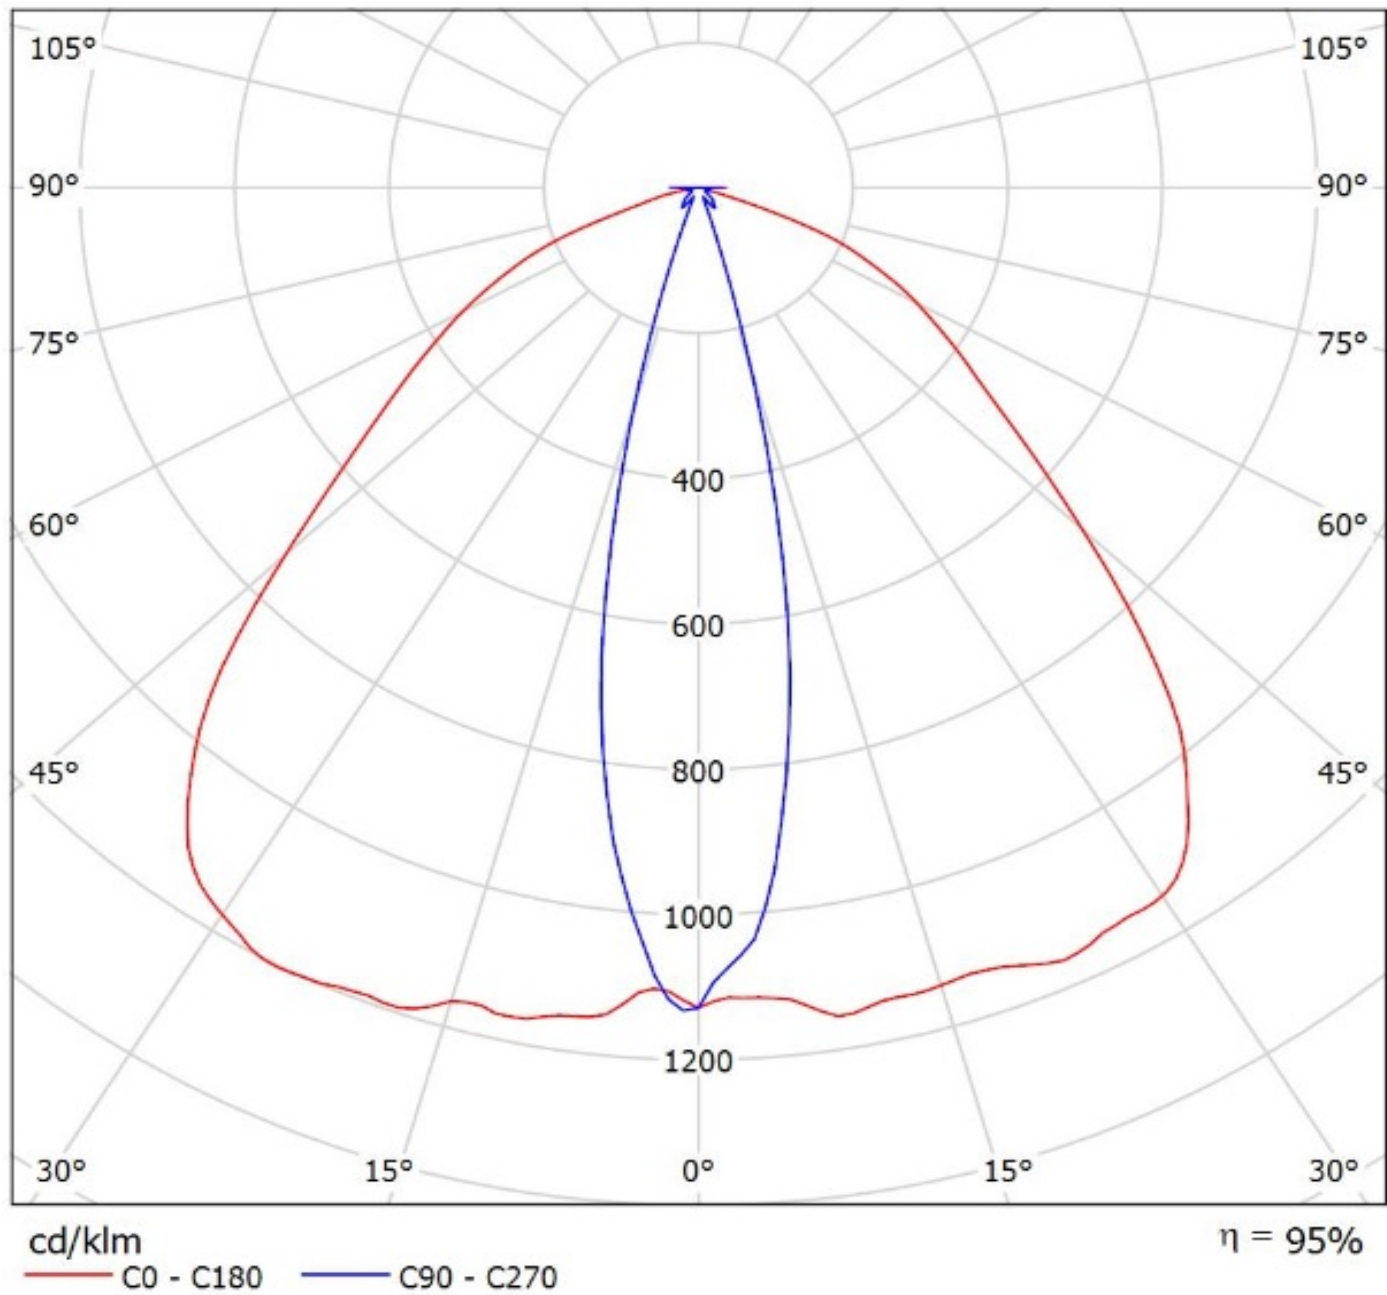

Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Luxeon_T)_2

Lamps: 1 x Luxeon_T_2x6_(LXH8-FW30)_1041.23lm@250mA_P=8.37779W_I=249.8mA

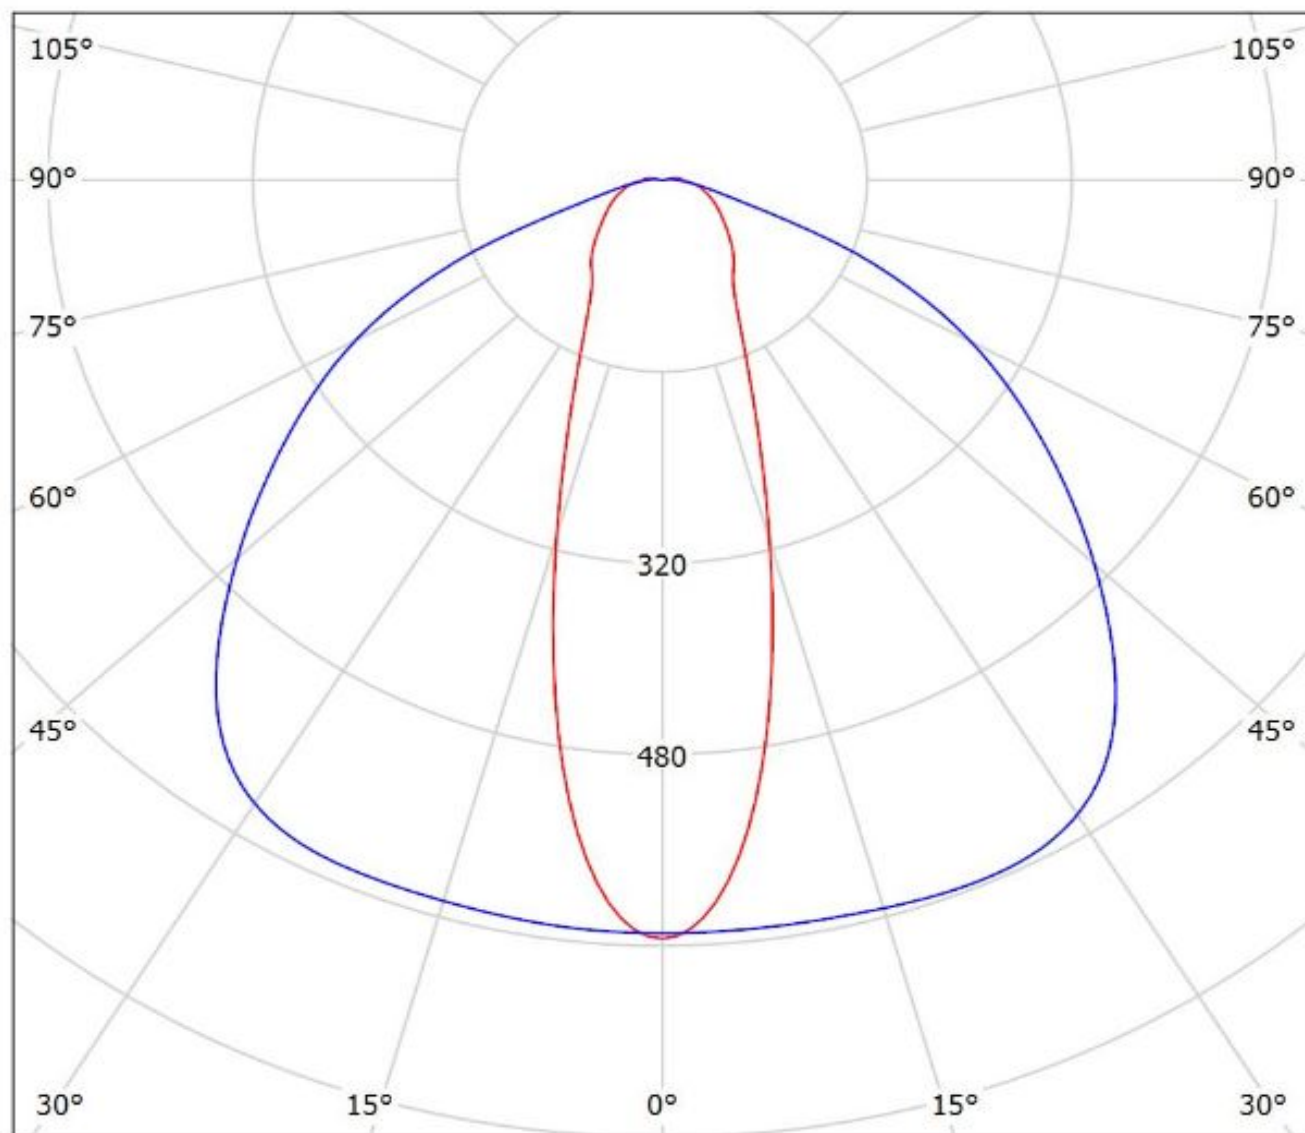

cd/klm


$\eta = 91\%$

— C0 - C180

— C90 - C270


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Luxeon_R)

Lamps: 1 x Philips_Lumileds_Luxeon_R_2x6_848.853lm@250mA_P=9.03352W_I=0.2498A

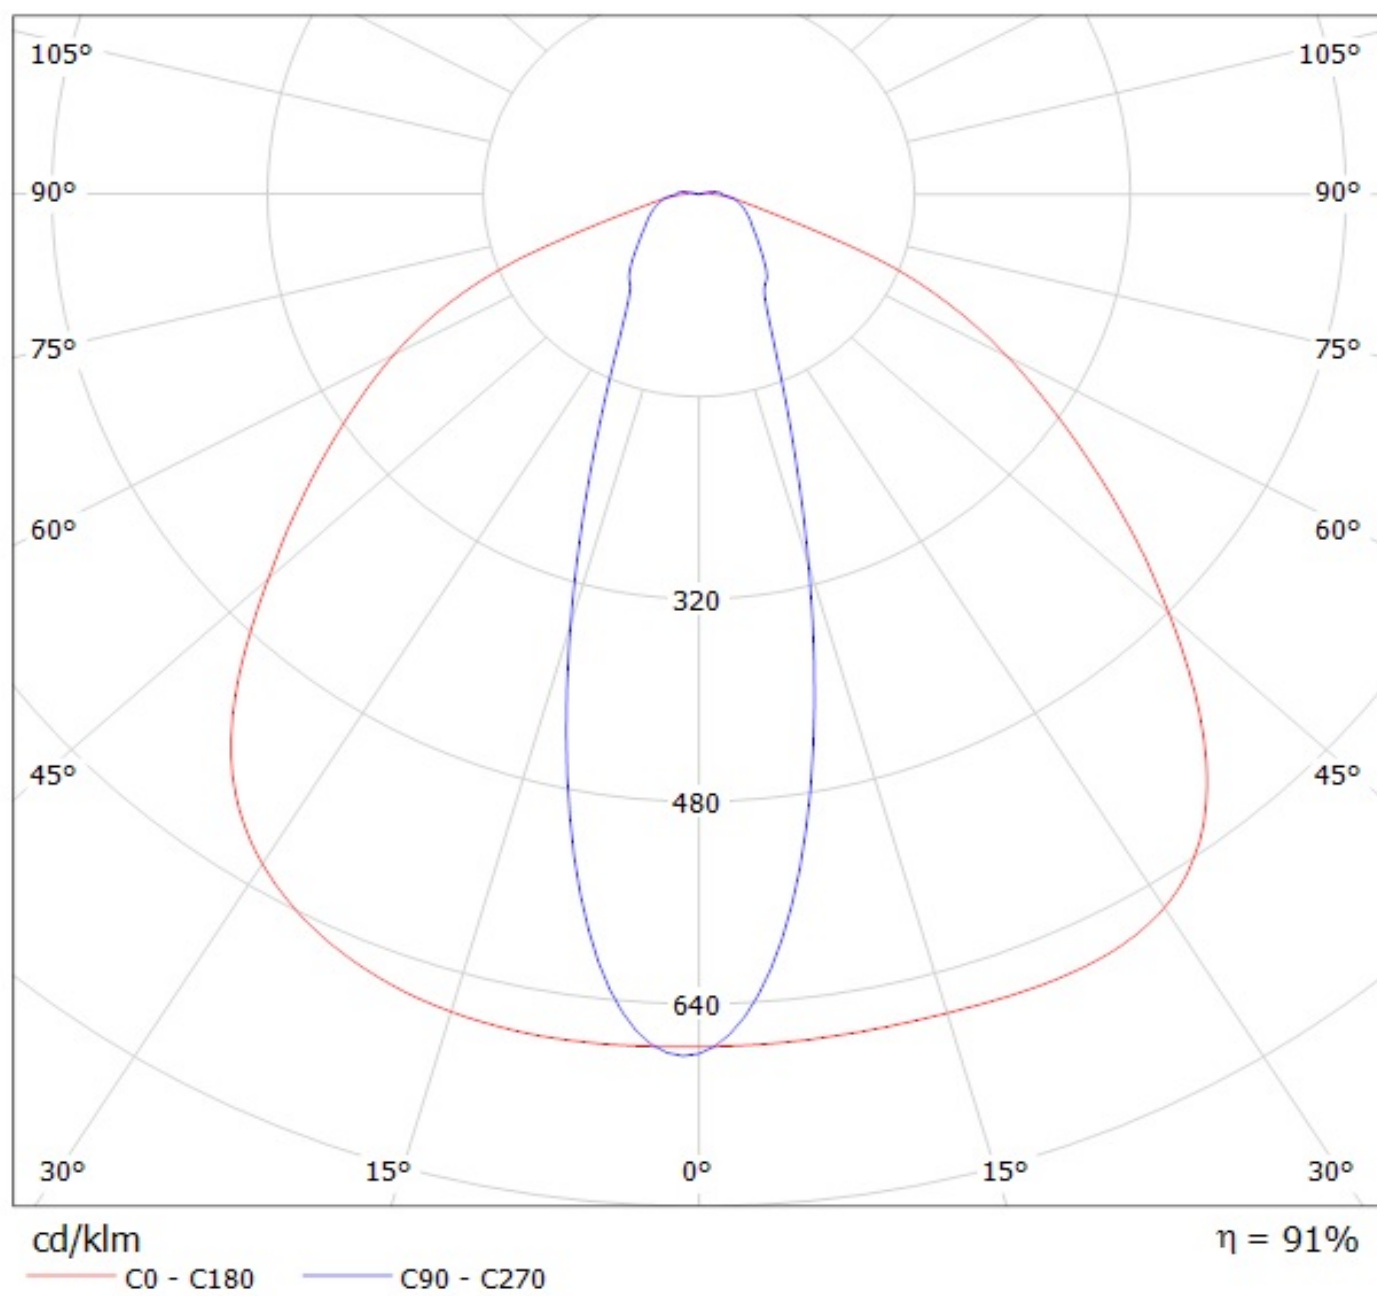


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Luxeon_Rebel)

Lamps: 1 x Philips_Lumileds_Luxeon_Rebel_2x6_(LXM8-PW30)_745.574lm@250mA_P=8.36755W_I=0.2498A

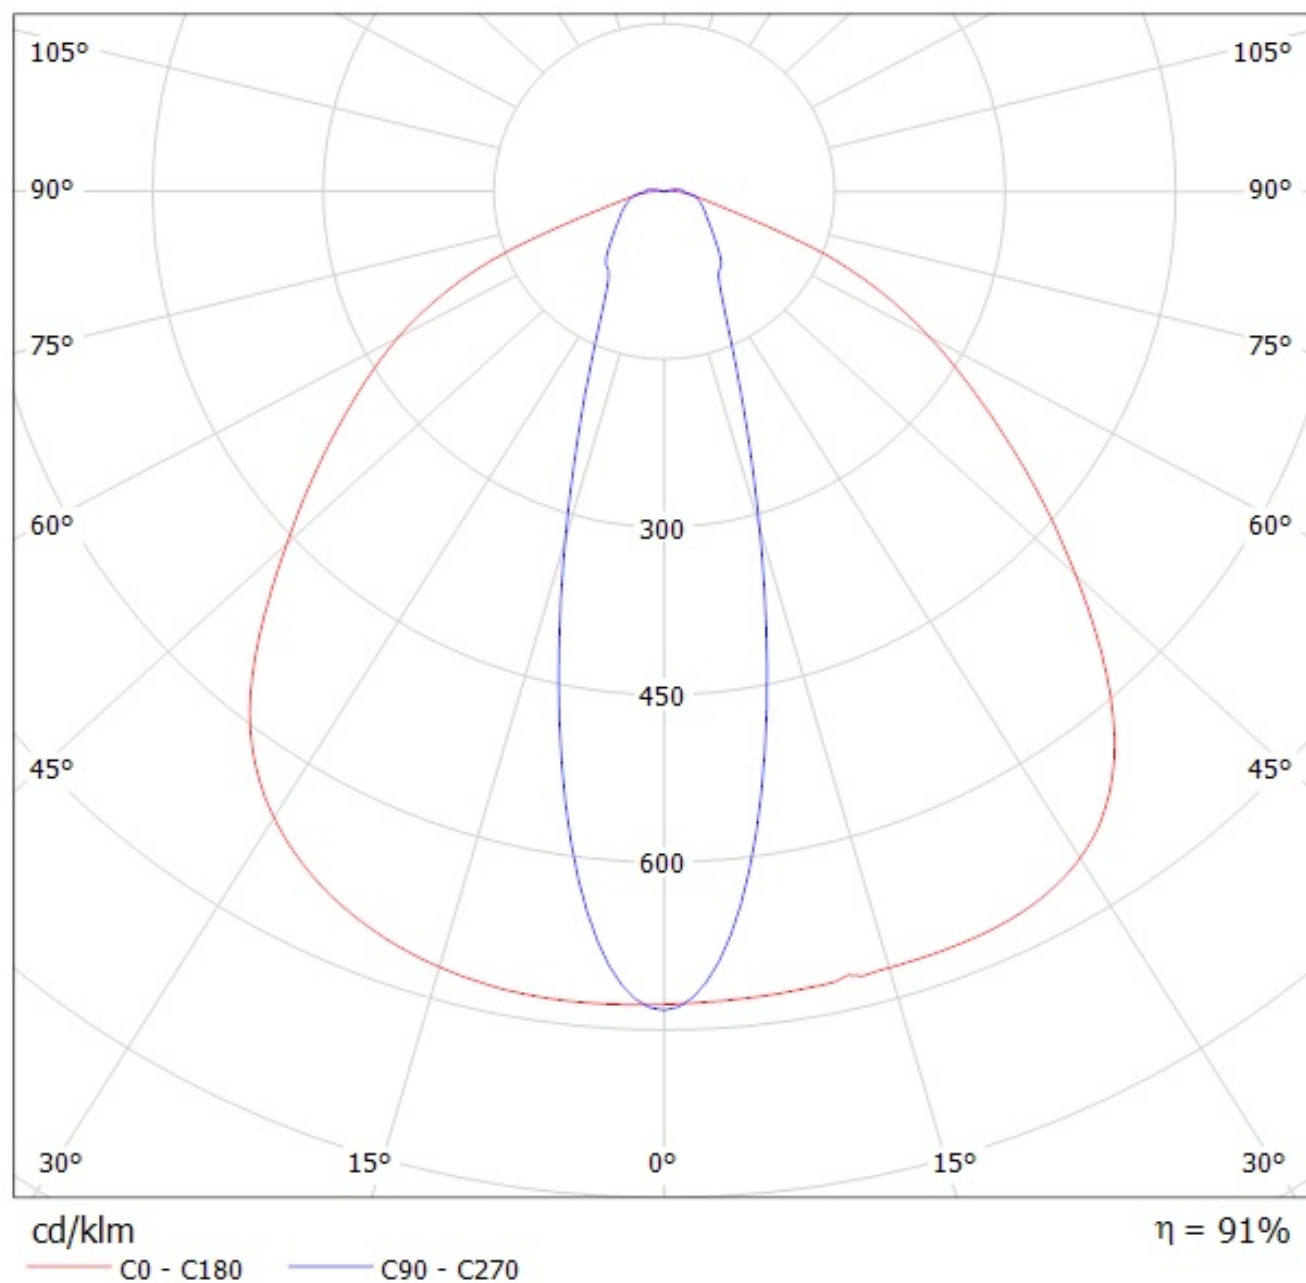

Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Luxeon_Rebel_ES)

Lamps: 1 x Philips_Lumileds_Luxeon_Rebel_ES_2x6_1132.87lm@250mA_P=8.30967W_I=0.2499A

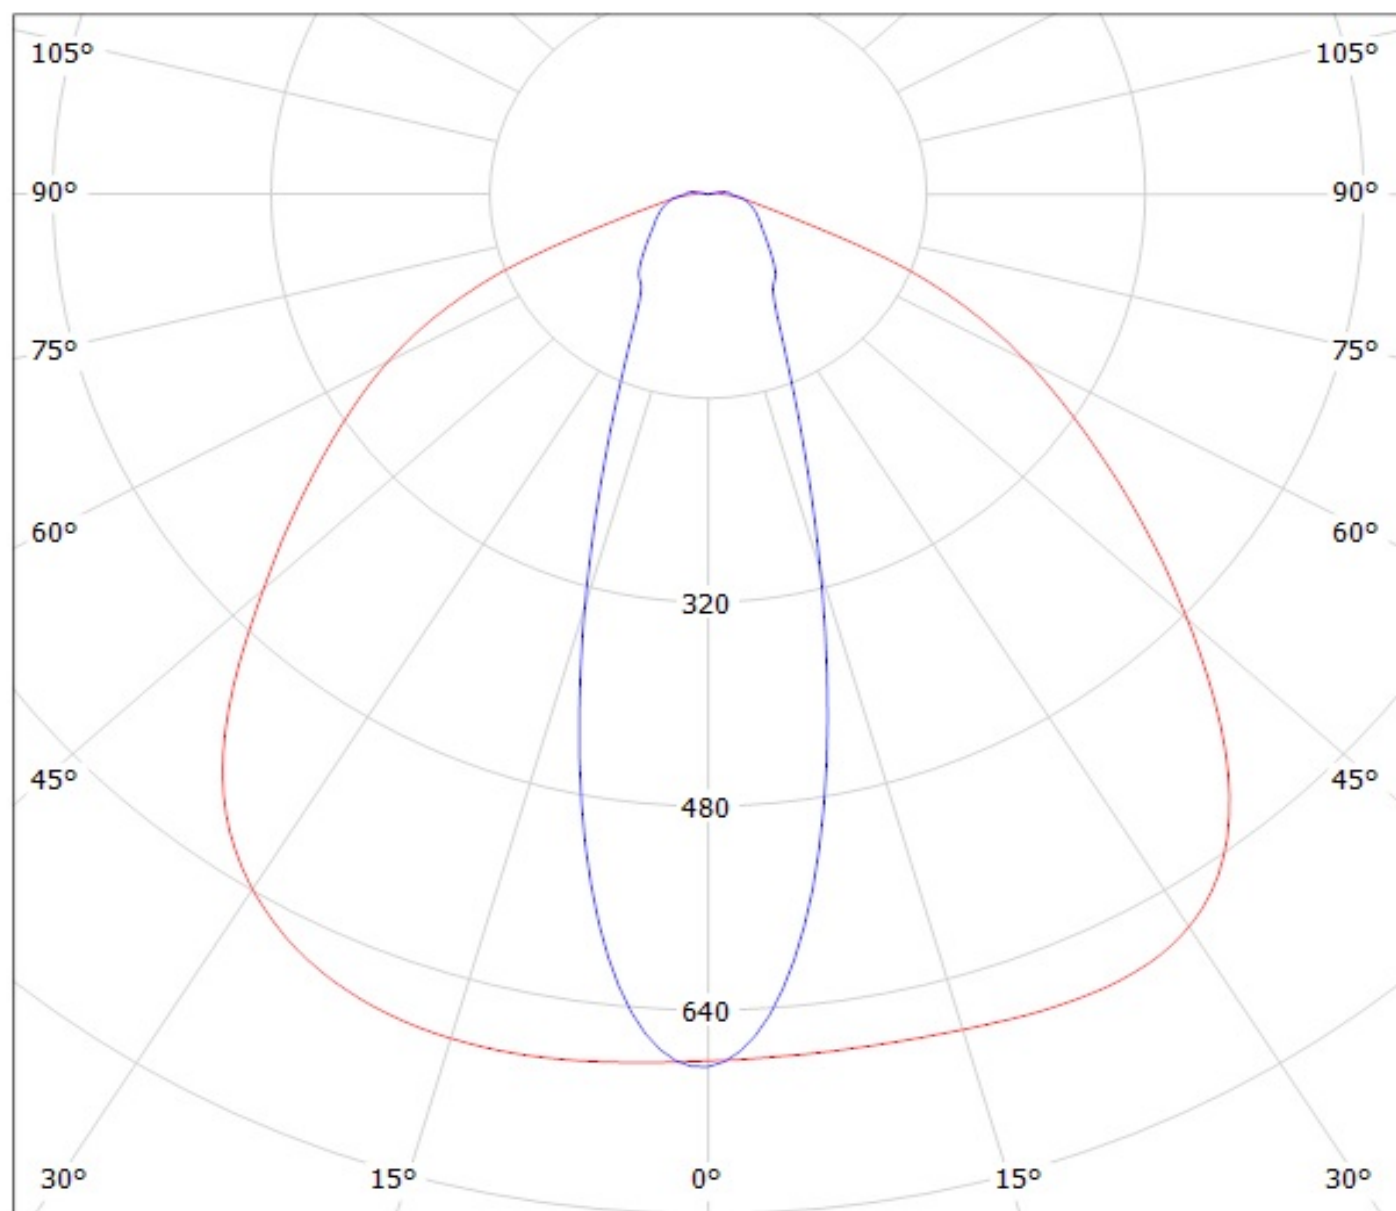

cd/klm


— C0 - C180

— C90 - C270

$\eta = 91\%$


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Luxeon_Z_ES)

Lamps: 1 x Philips_Lumileds_Luxeon_Z_ES_2x6_977.042lm@250mA_P=8.33092W_I=0.2499A

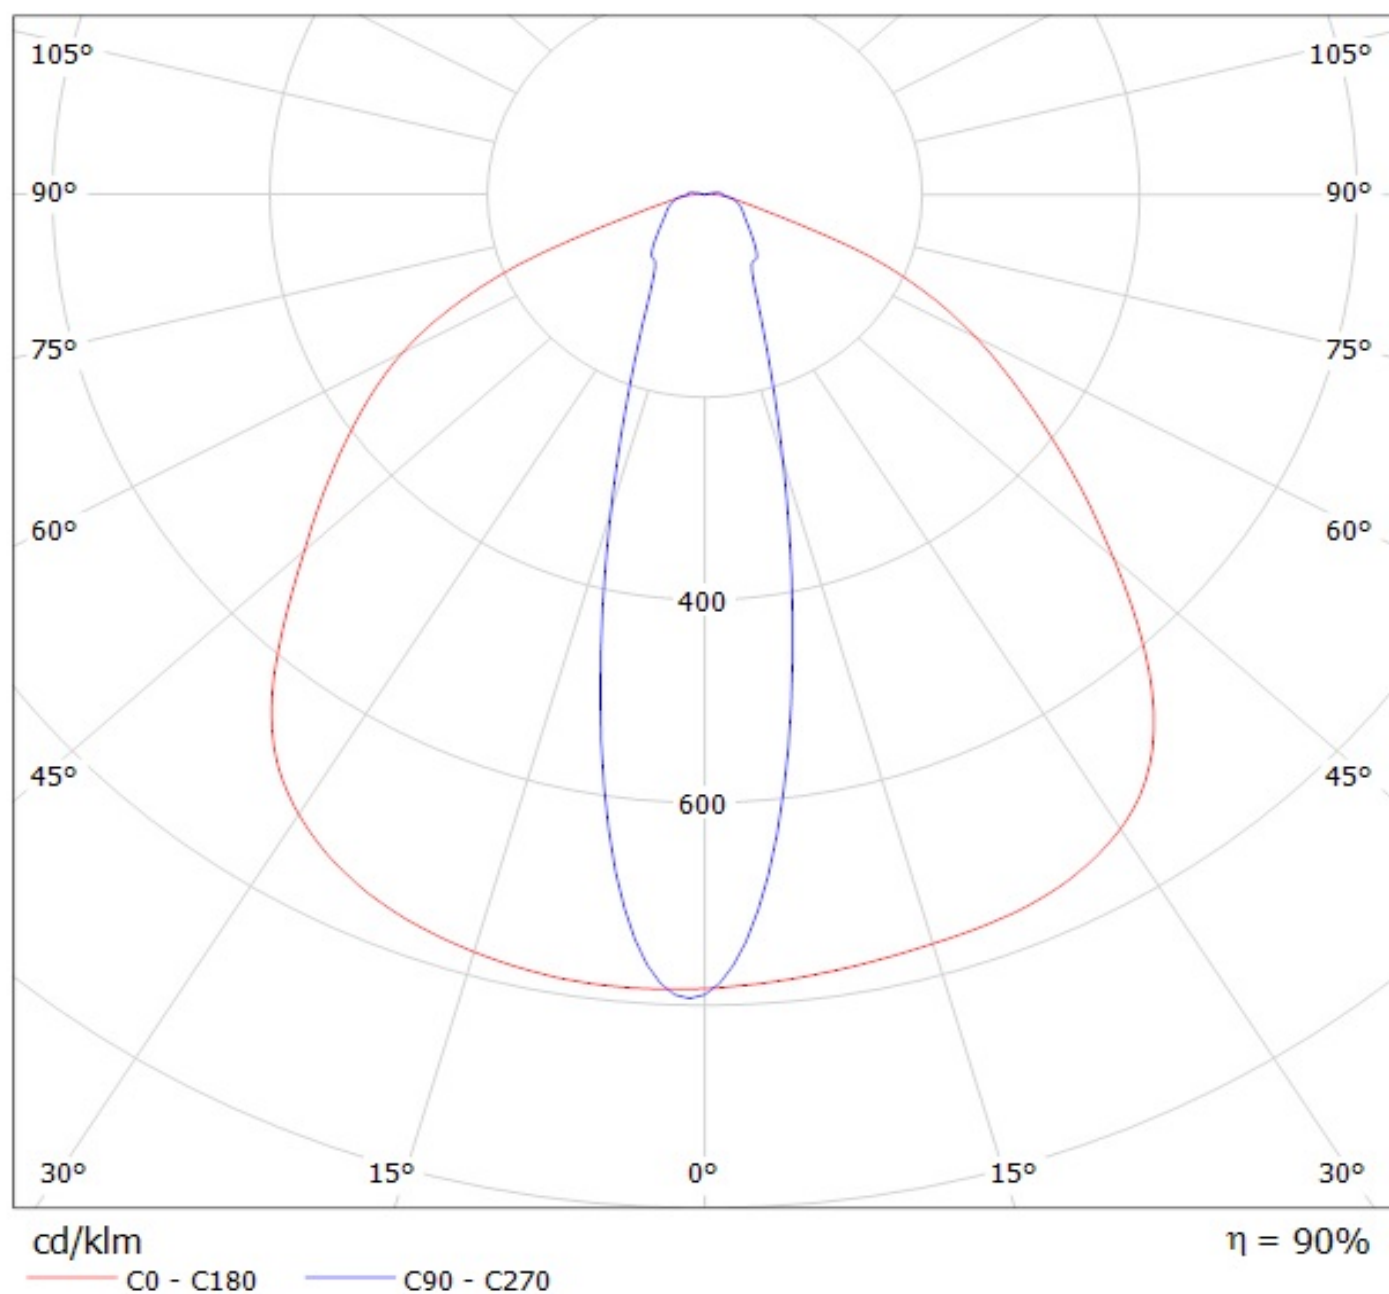


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Luxeon_TX)


Lamps: 1 x Philips_Lumileds_Luxeon_TX_2x6_1294.69lm@250mA_P=8.32967W_I=0.2499A

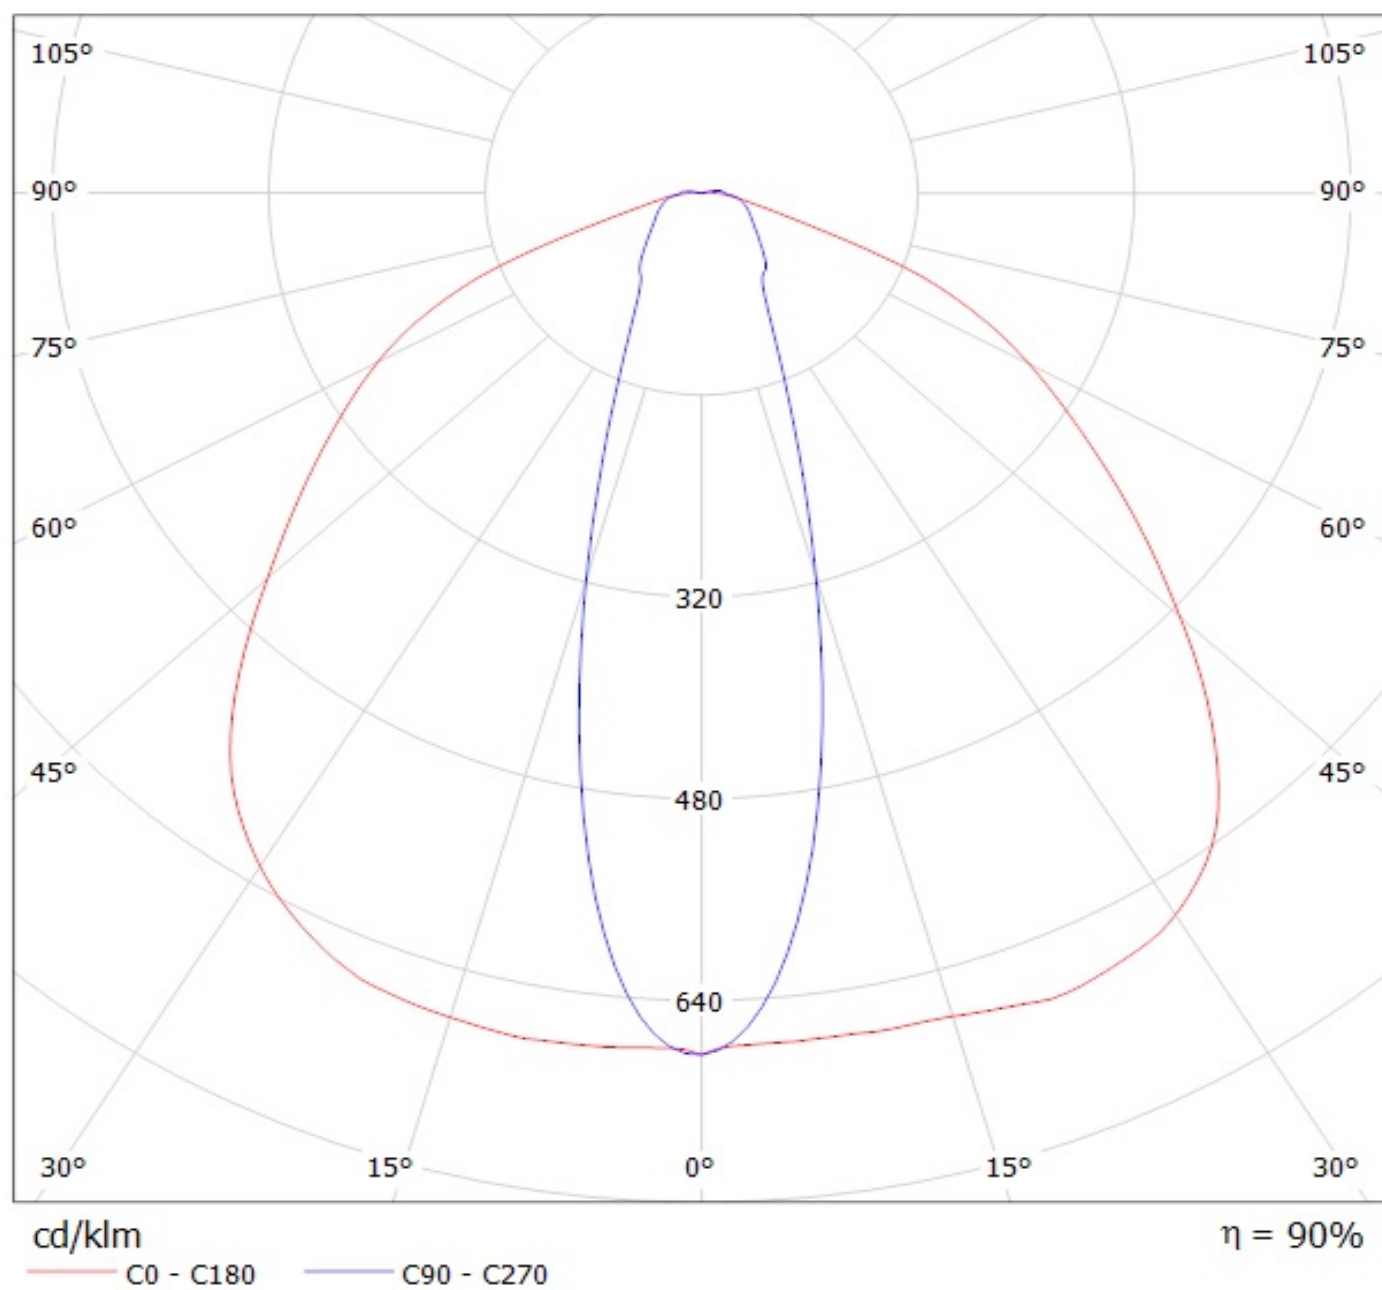

Luminaire: Ledil CS14597_HB-IP-2X6-O_(XR-TX)
Lamps: 1 x Luxeon_XR-TX_1376.41lm@250mA_P=8.3920W_I=0.250A

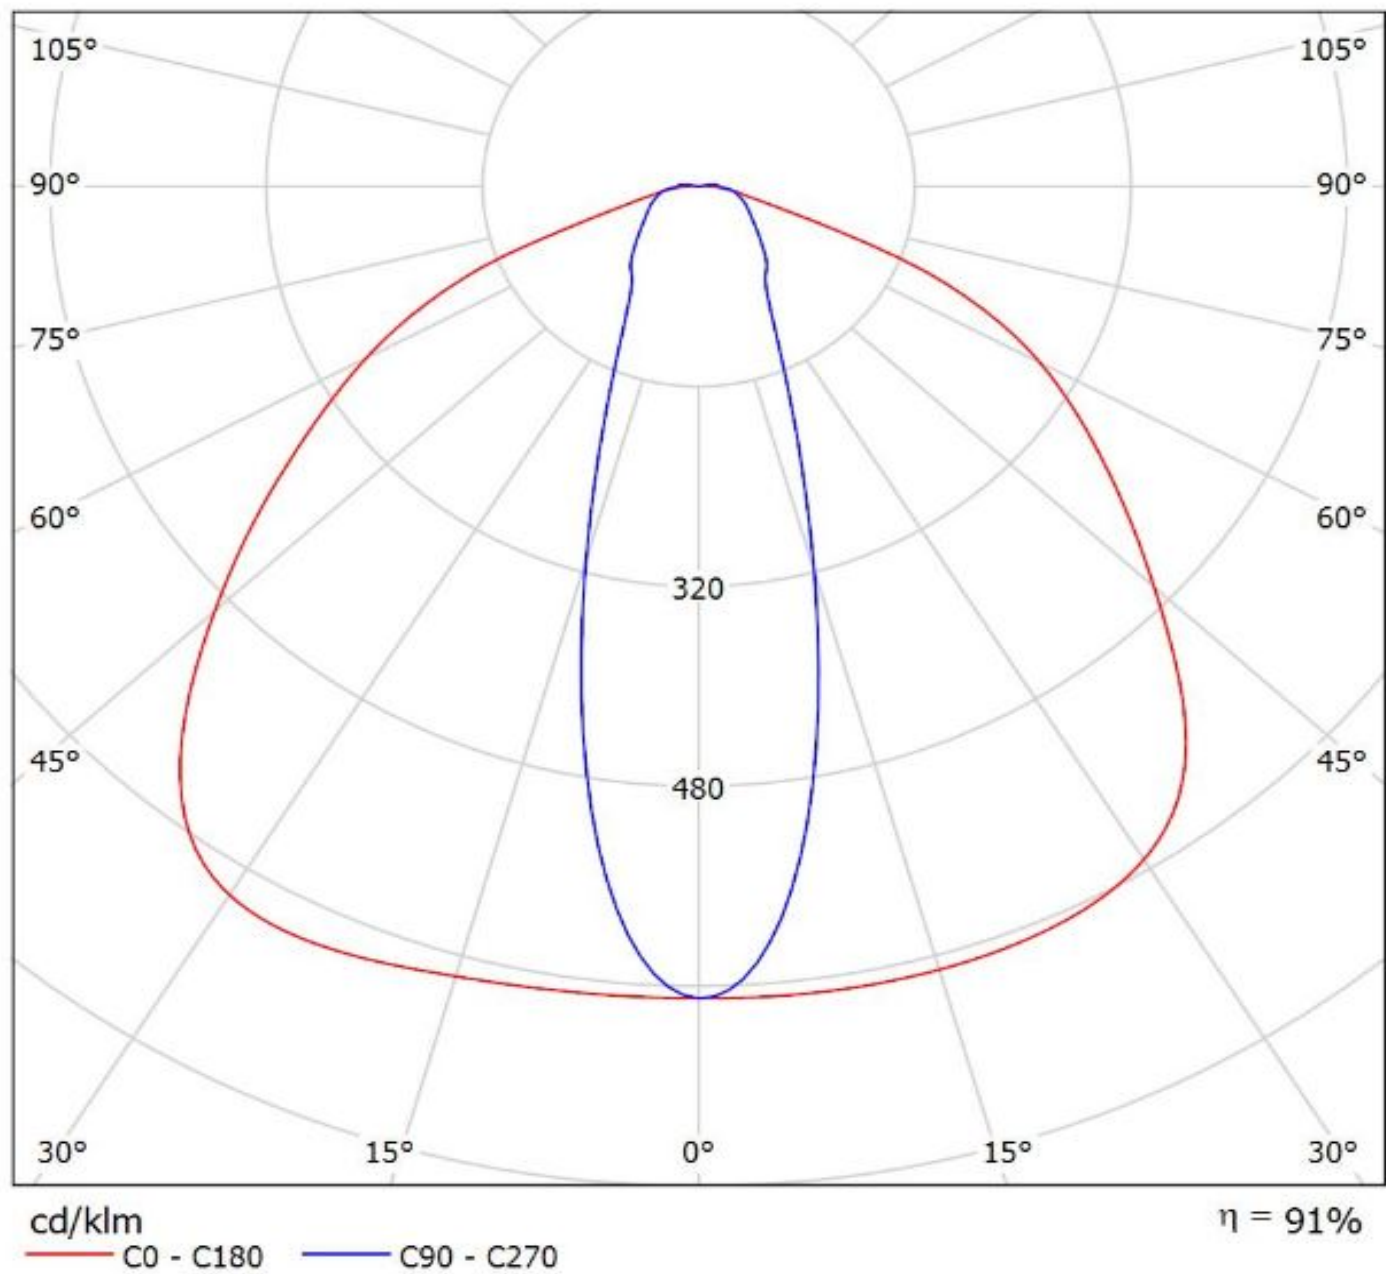


Luminaire: Ledil Oy CS14597_HB-IP-2X6-O_LUXEON-5050_SIMULATED
Lamps: 1 x Lumileds Luxeon 5050

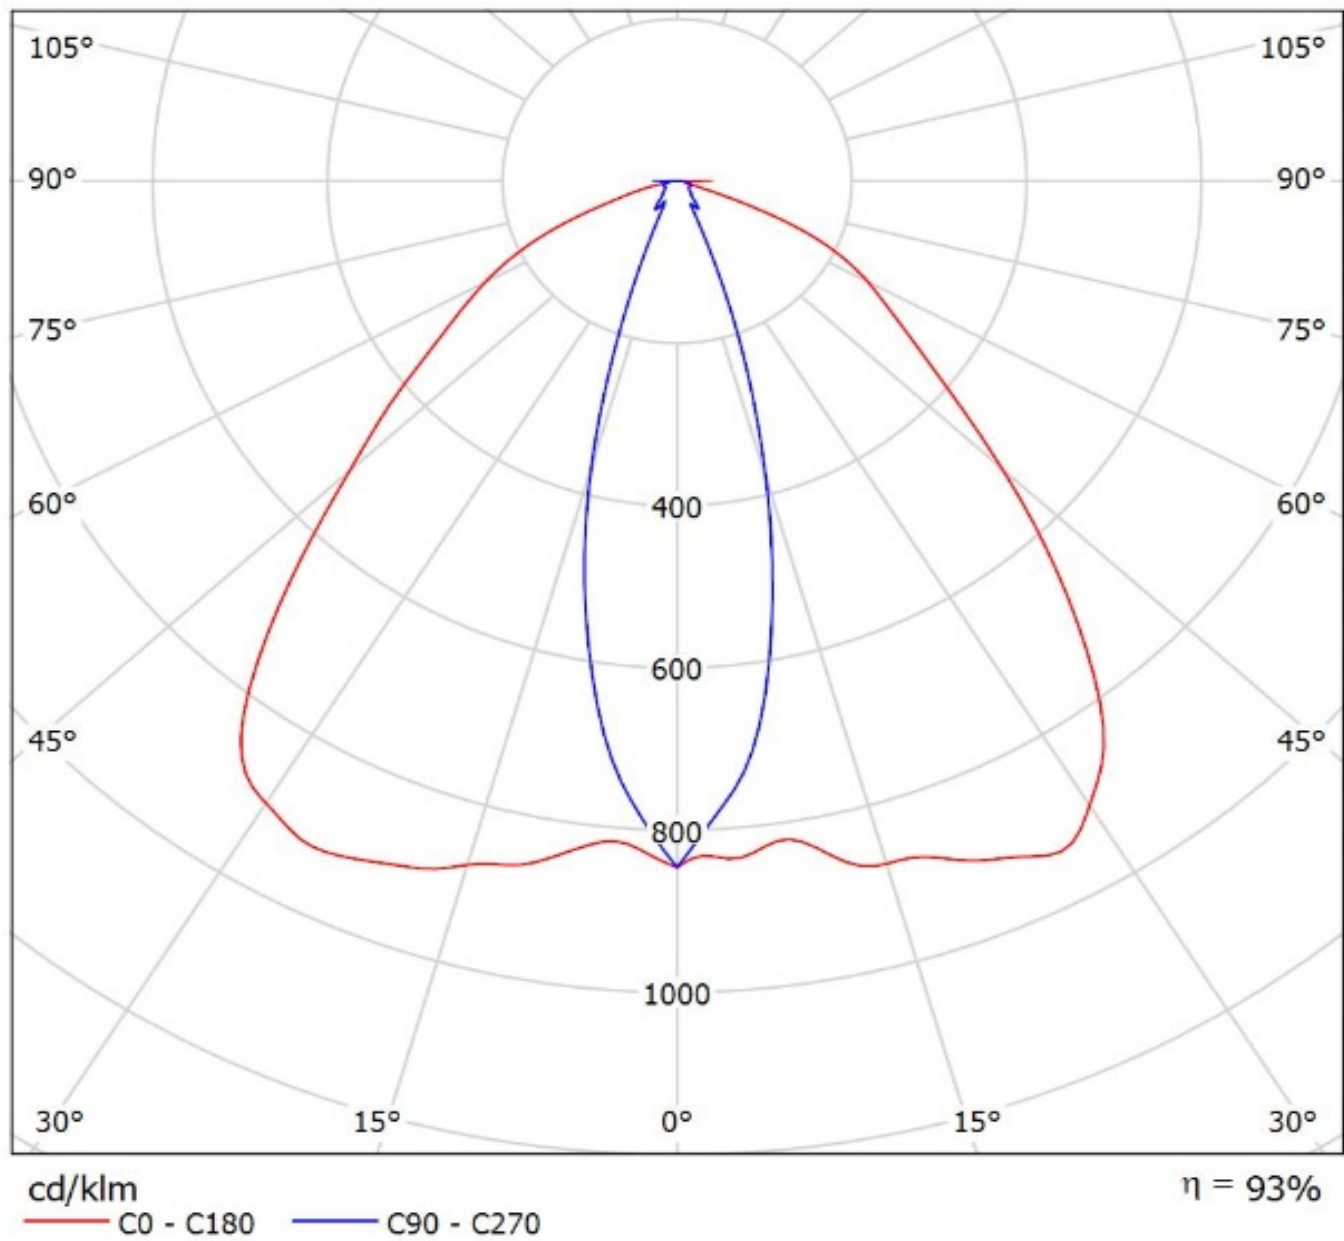

Luminaire: Ledil CS14597_HB-IP-2X6-O_(Luxeon_V)

Lamps: 1 x Lumileds_Luxeon_V_1451.92lm@250mA_P=8.21196W_U=32.860V

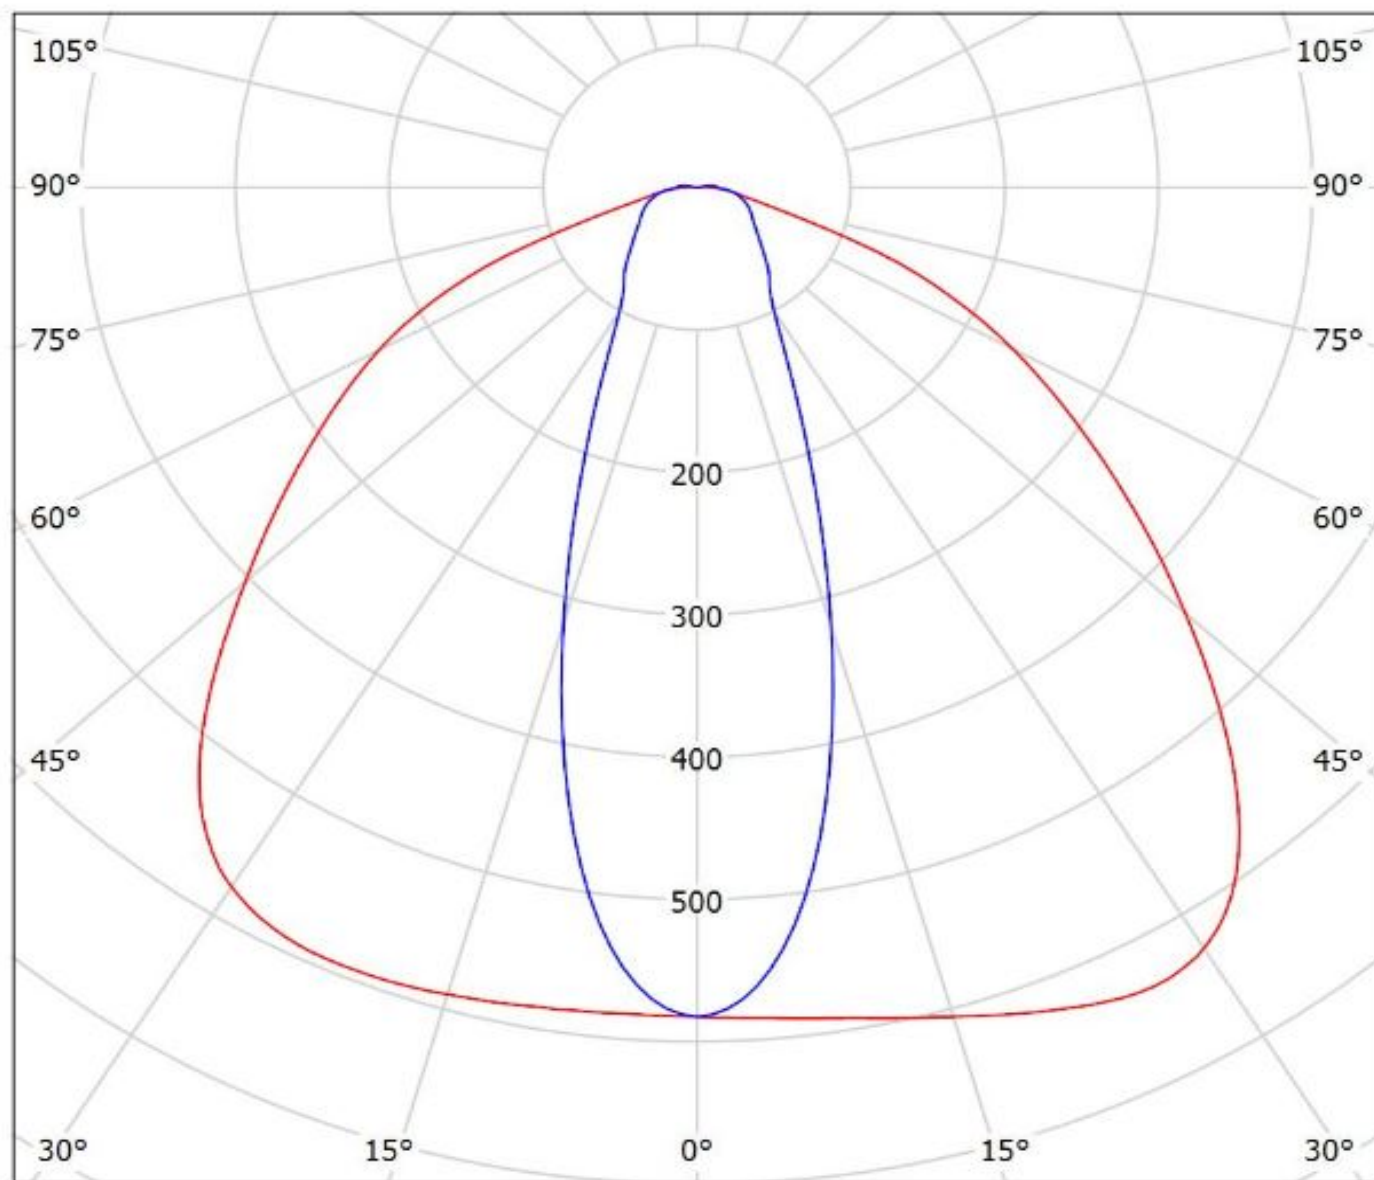

cd/klm


— C0 - C180

— C90 - C270

$\eta = 87\%$


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(NVSxx19B)

Lamps: 1 x Nichia_NVsxx19B_(NVSL219BT)_2x6_1264.03lm@250mA_P=8.31559W_I=0.2498A

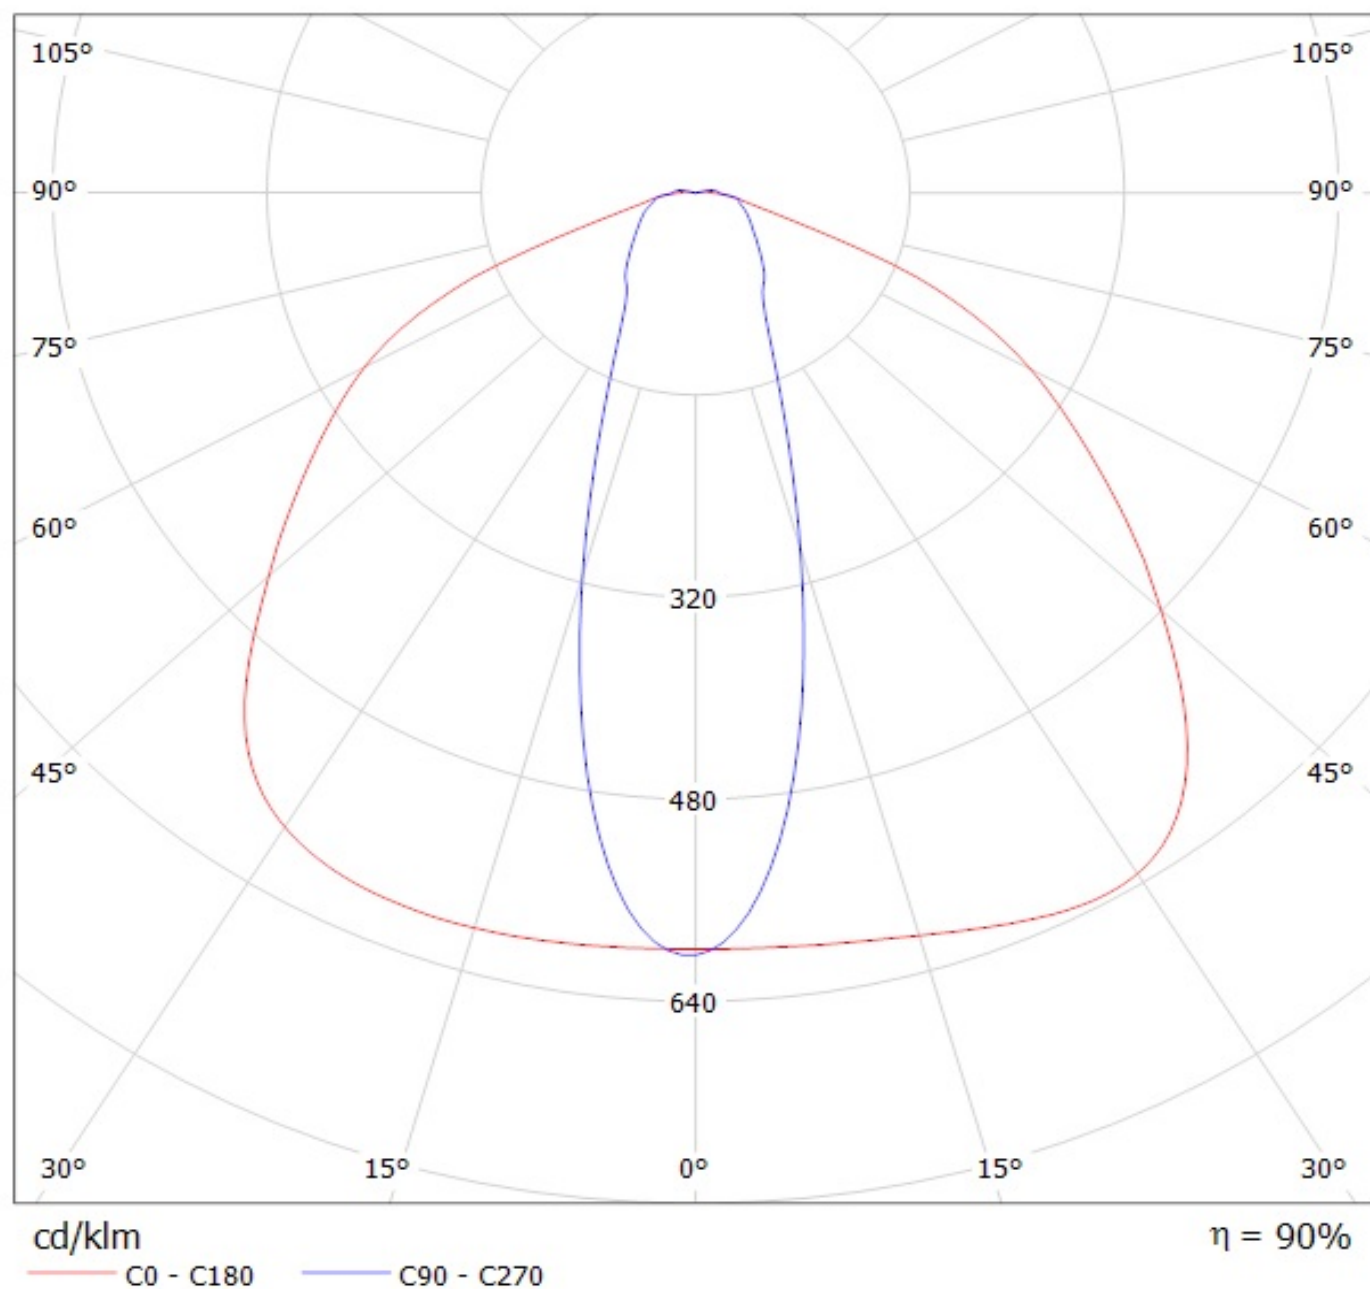


Luminaire: Ledil CS14597_HB-IP-2X6-O_(Nichia_E21)

Lamps: 1 x Nichia_NVSW E21A_602.725lm@600mA_P=3.5006W_η=0.600A

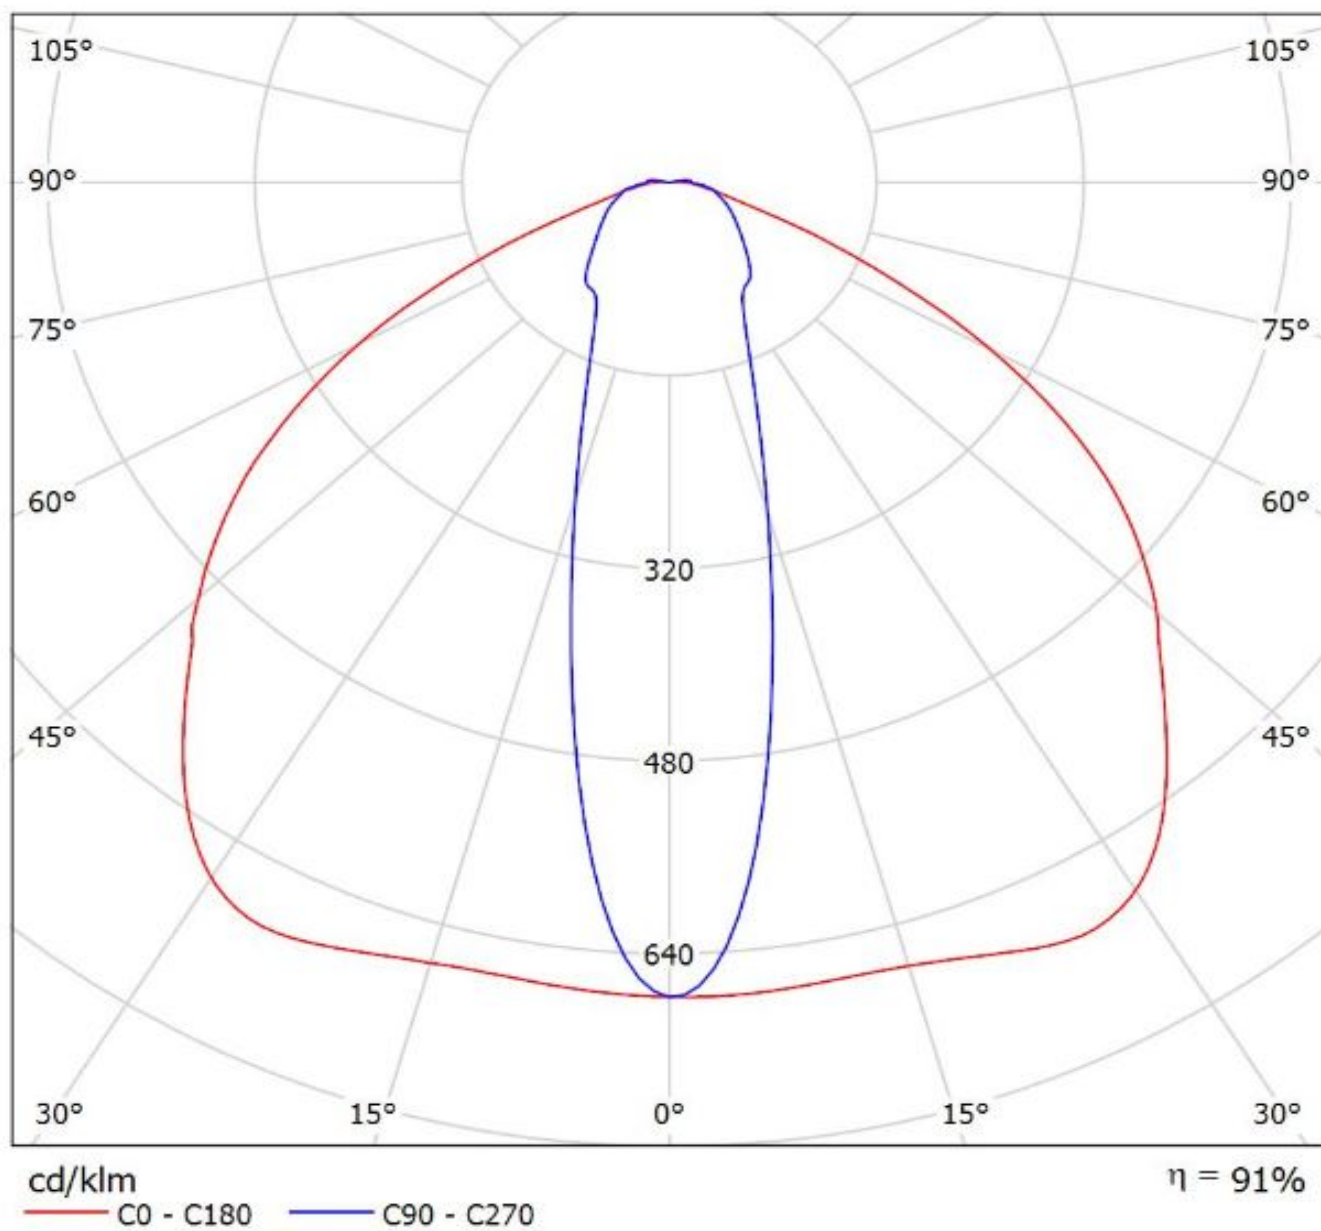


Luminaire: Ledil Oy CS14597_HB-IP-2X6-O_NVSW3x9A_SIMULATED
Lamps: 1 x Nichia NVSW219A

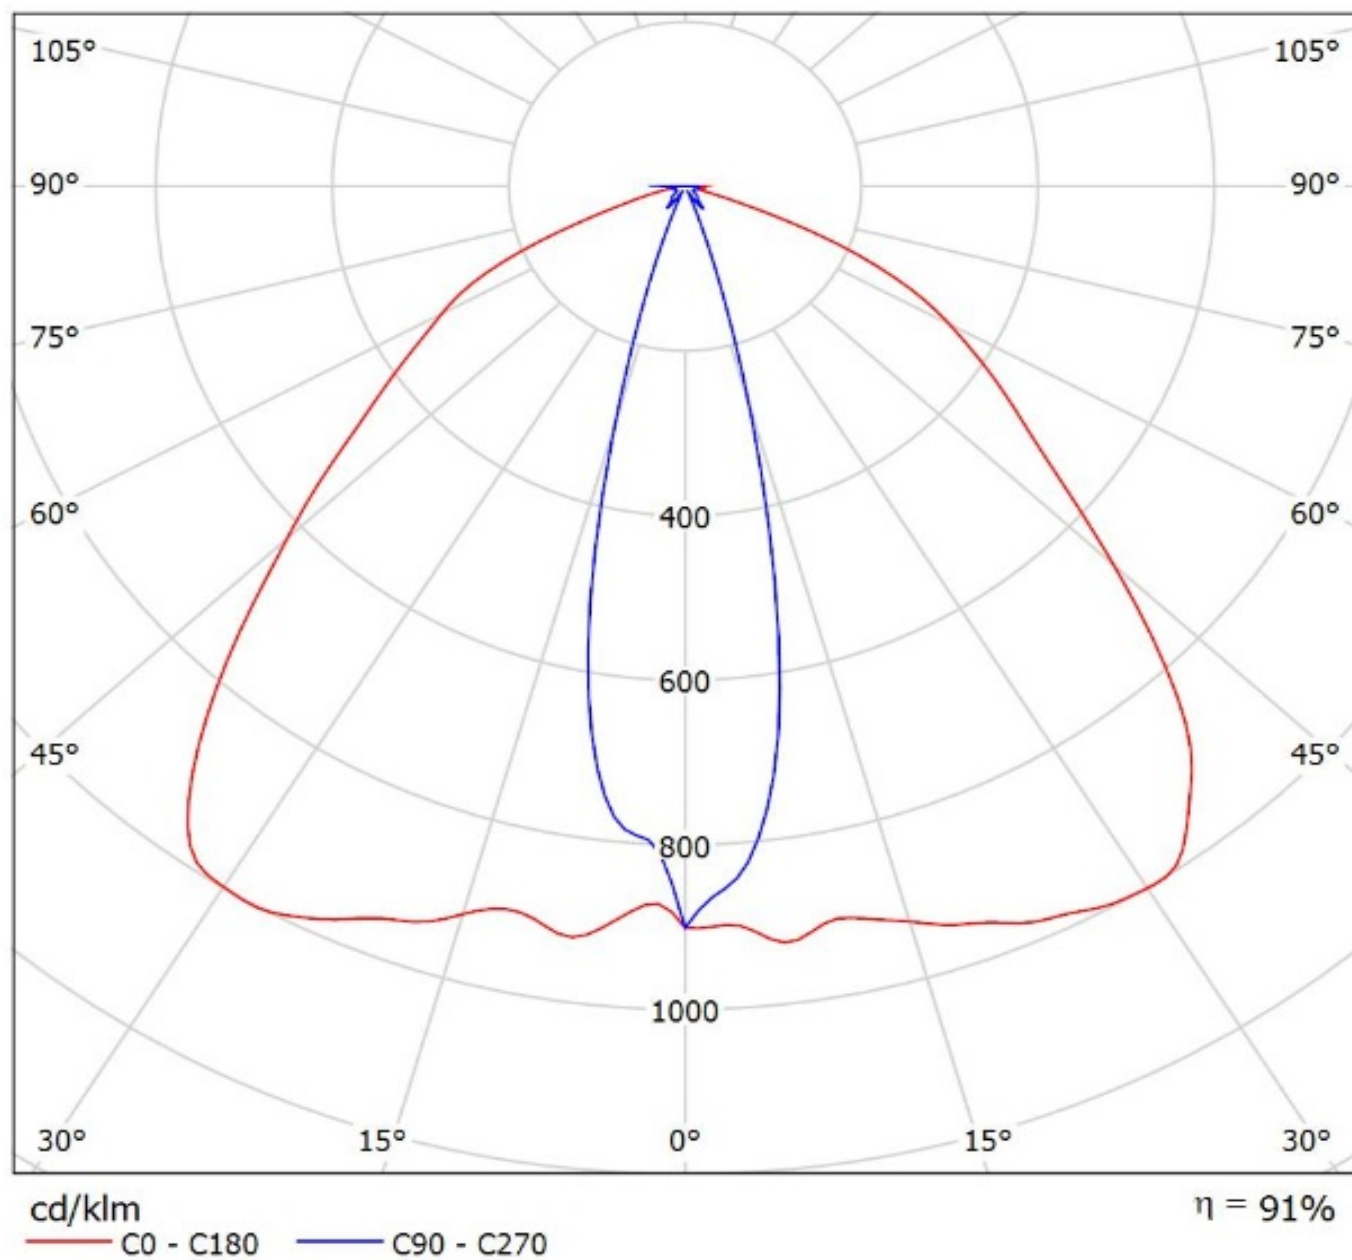


Luminaire: Ledil CS14597_HB-IP-2X6-O_(NVSL219CT)

Lamps: 1 x Nichia_NVSL219CT_2x6_1262.53lm@250mA_P=8.35825W_I=0.25A

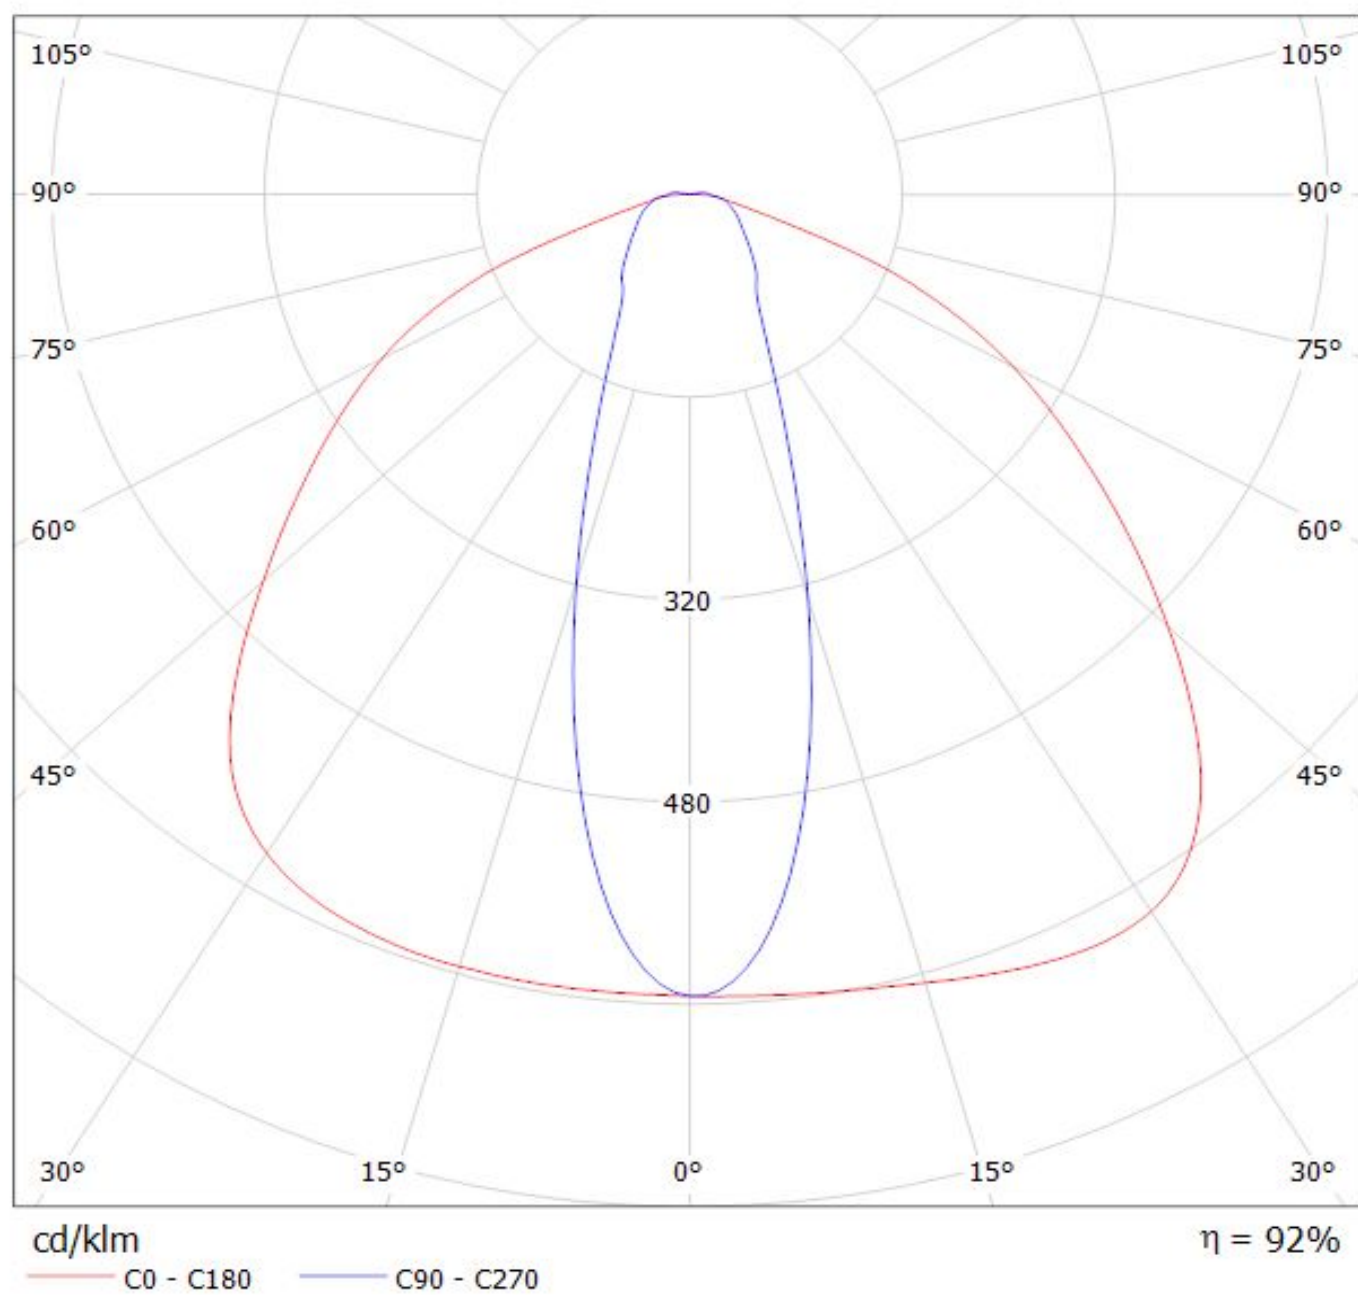


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Oslon_Square_PC)

Lamps: 1 x Osram_Oslon_Square_PC_2x6_1225.05lm@250mA_P=8.80595W_I=0.2498A

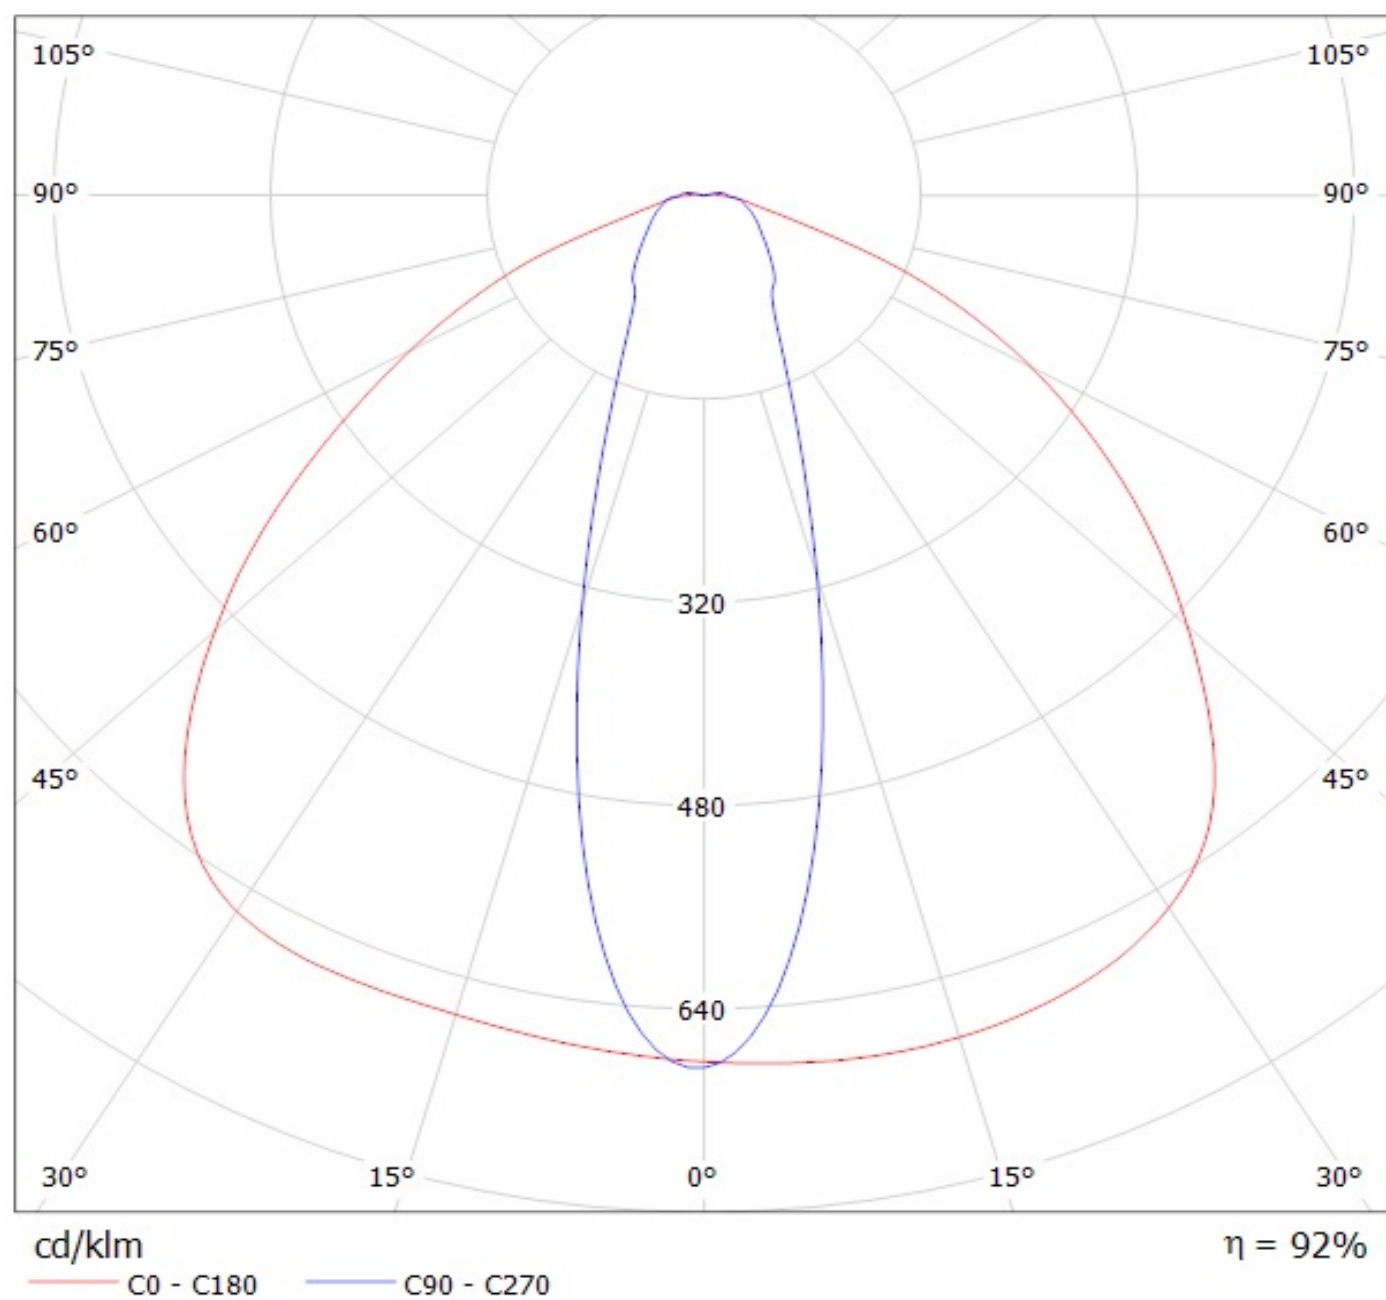


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Oslon_Square_EC)

Lamps: 1 x Osram_Oslon_Square_EC_2x6_(LCW CQAR.EC-MQMS-5R8T-35)_948.673lm@250mA_P=8.85466W_I=0.2498A

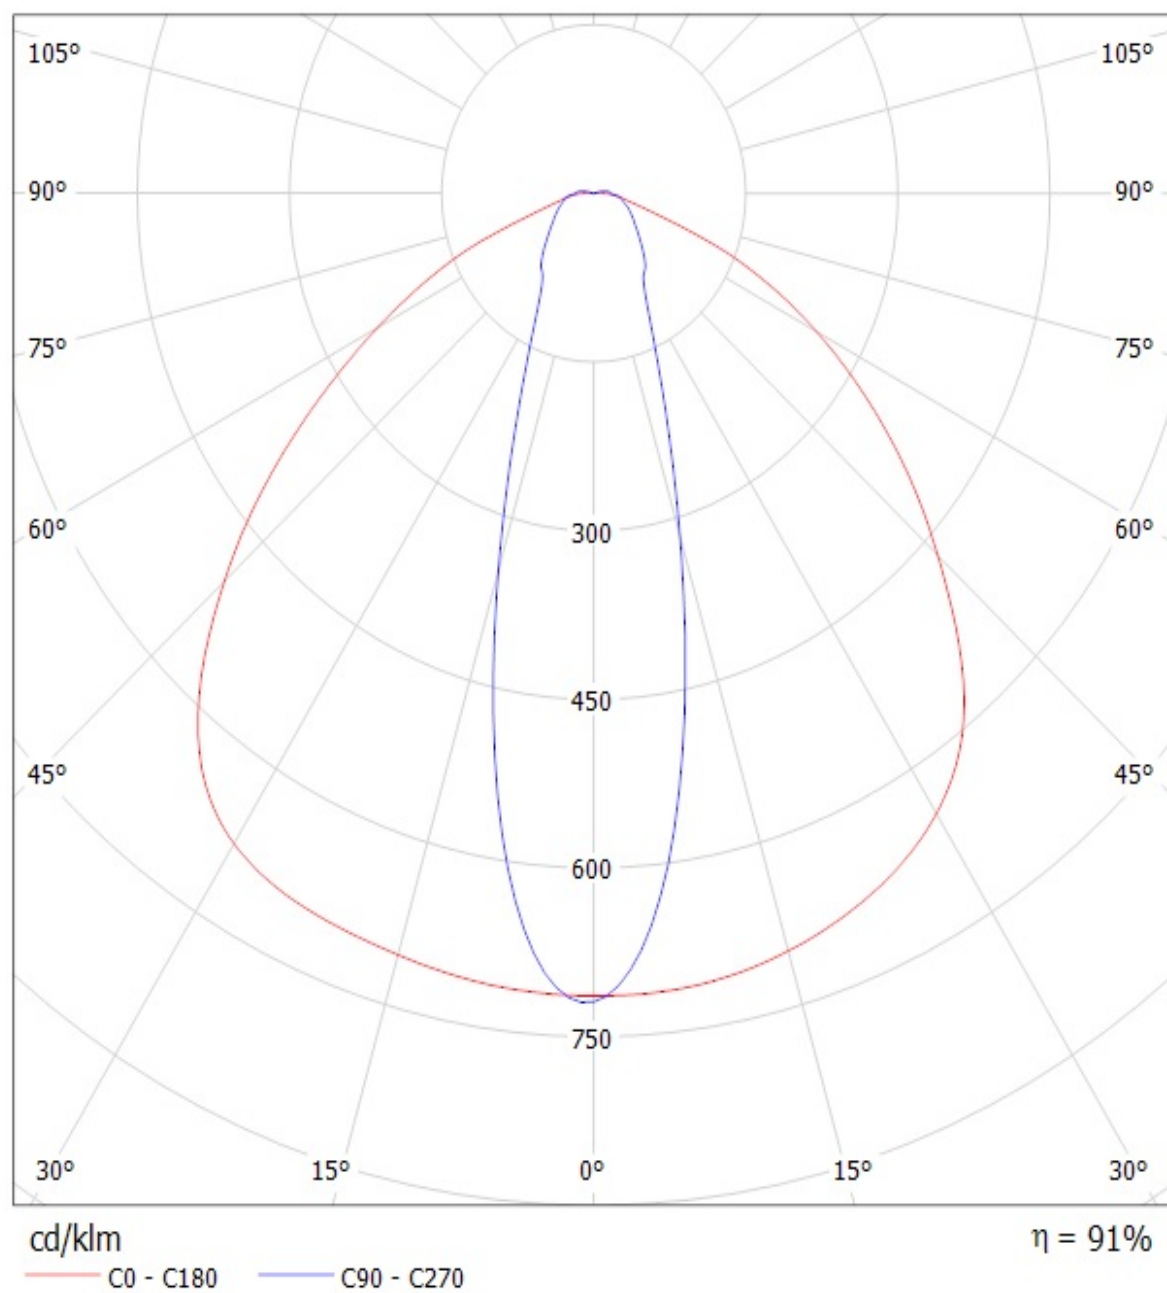


Luminaire: Ledil CS14597_HB-IP-2X6-O_(Duris_S8_2x6)
Lamps: 1 x Duris_S8_2x6_1600.71lm@150mA_P=10.21W_I=0.15A

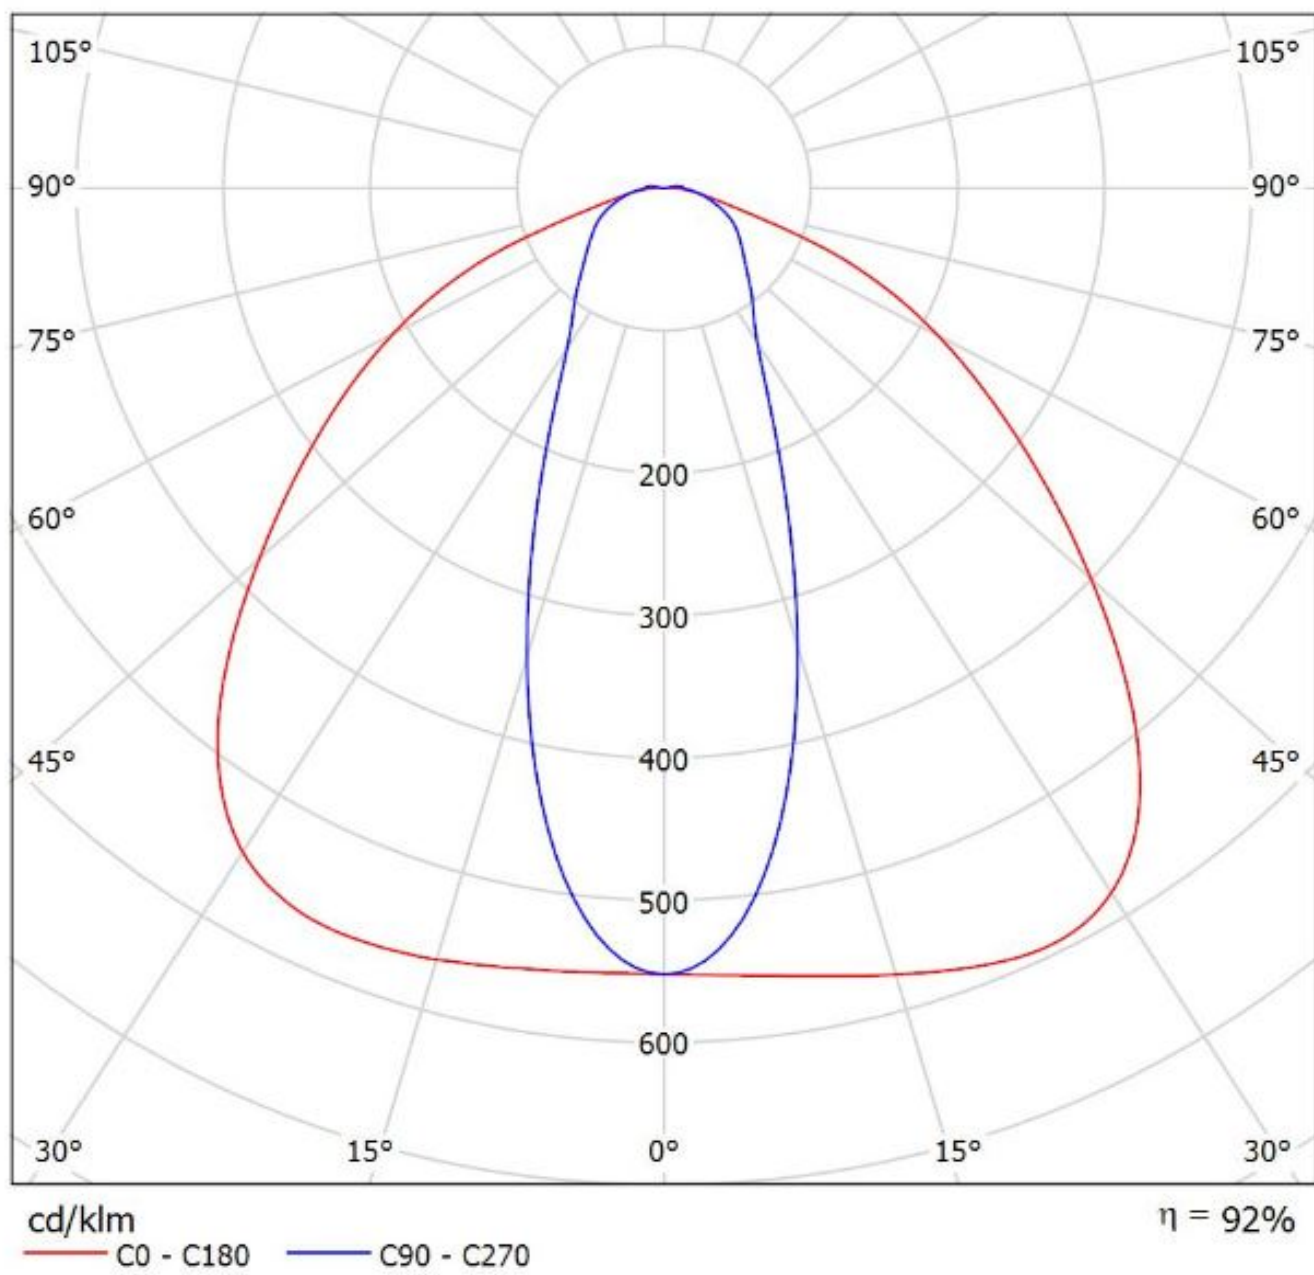

Luminaire: Ledil CS14597_HB-IP-2X6-O_(Square_Gen3)

Lamps: 1 x Osram-Oslon_Square_Gen3_(PM-MUNQ-A737-1)_1311.93lm@250mA_P=8.2362W_I=0.25A

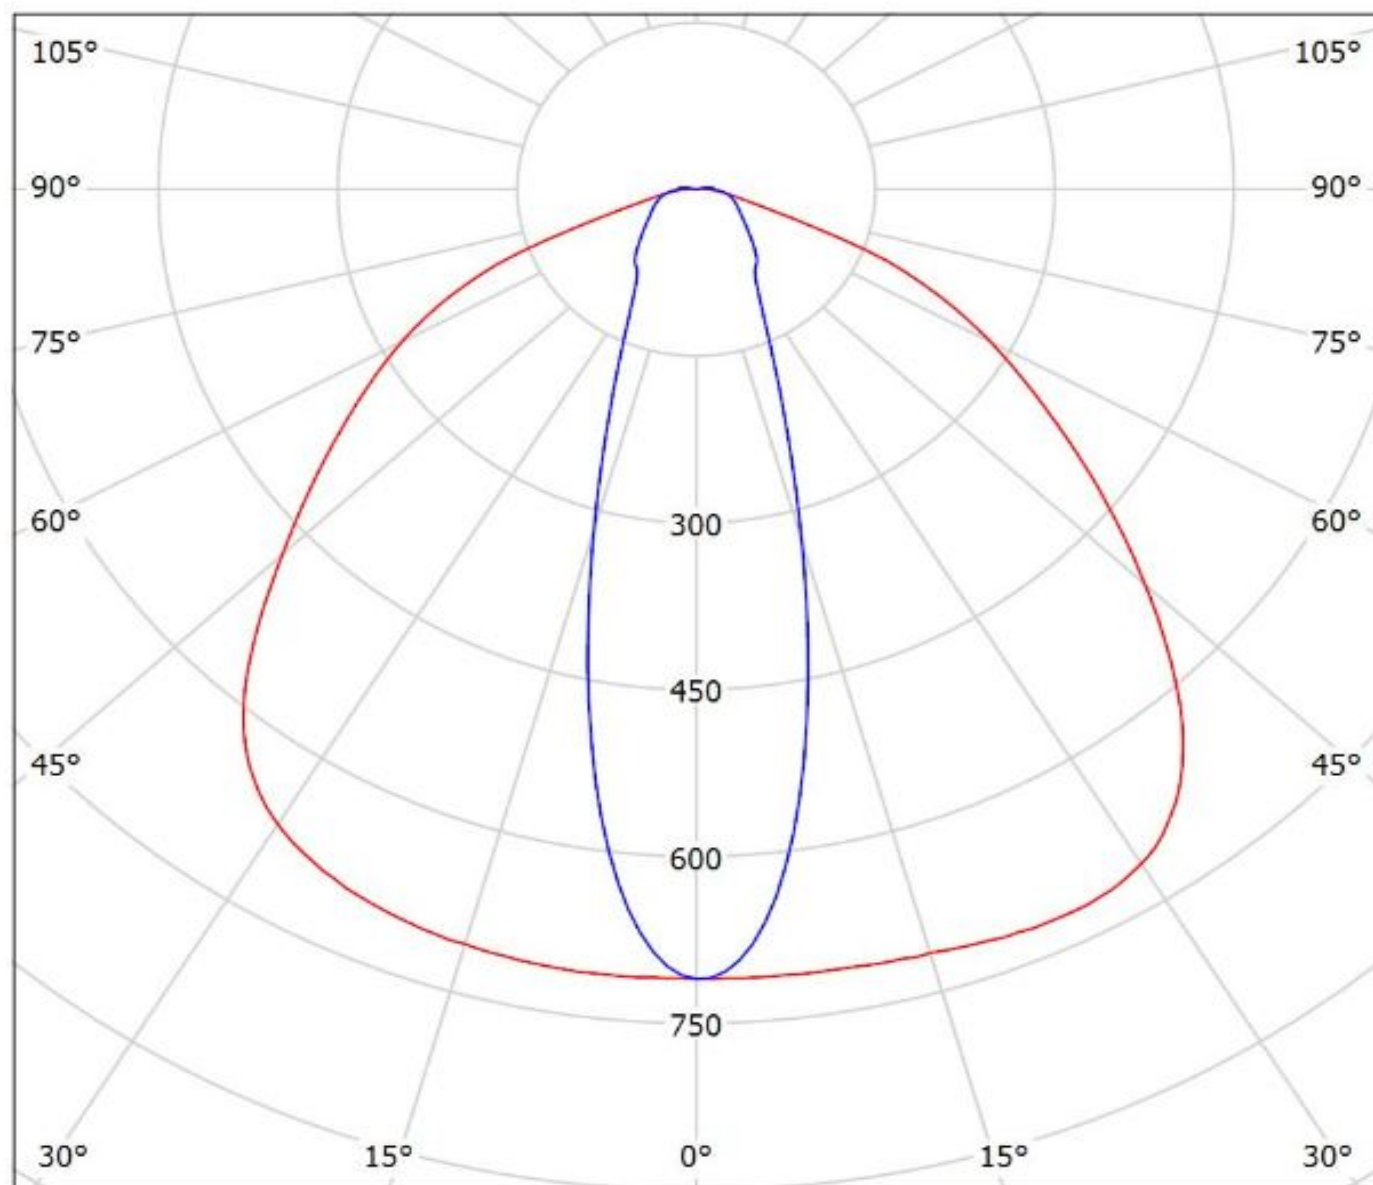


cd/klm


— C0 - C180 — C90 - C270

η = 92%


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(SSL80)
Lamps: 1 x SSL80_1292.29lm@250mA_P=8.5574W_I=0.250A

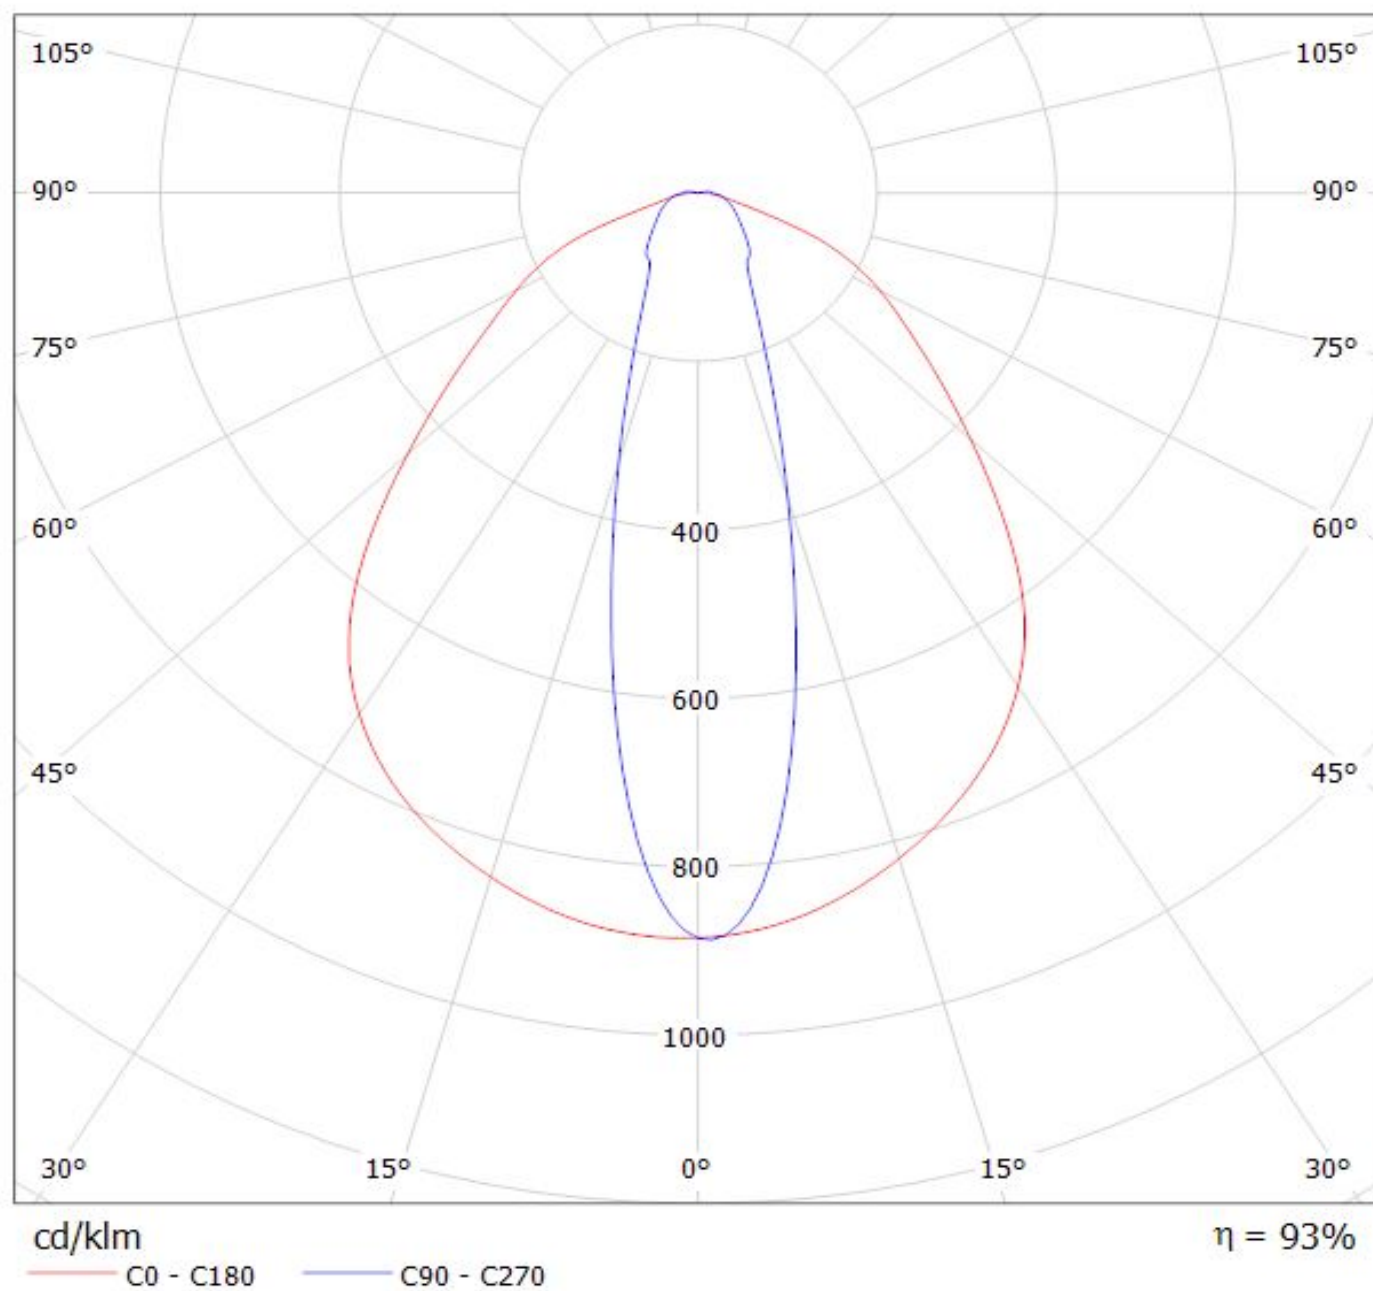


Luminaire: Ledil Oy CS14597_HB-IP-2X6-O_OSRAM_DURIS_P9_SIMULATED
Lamps: 1 x OSRAM DURIS P9

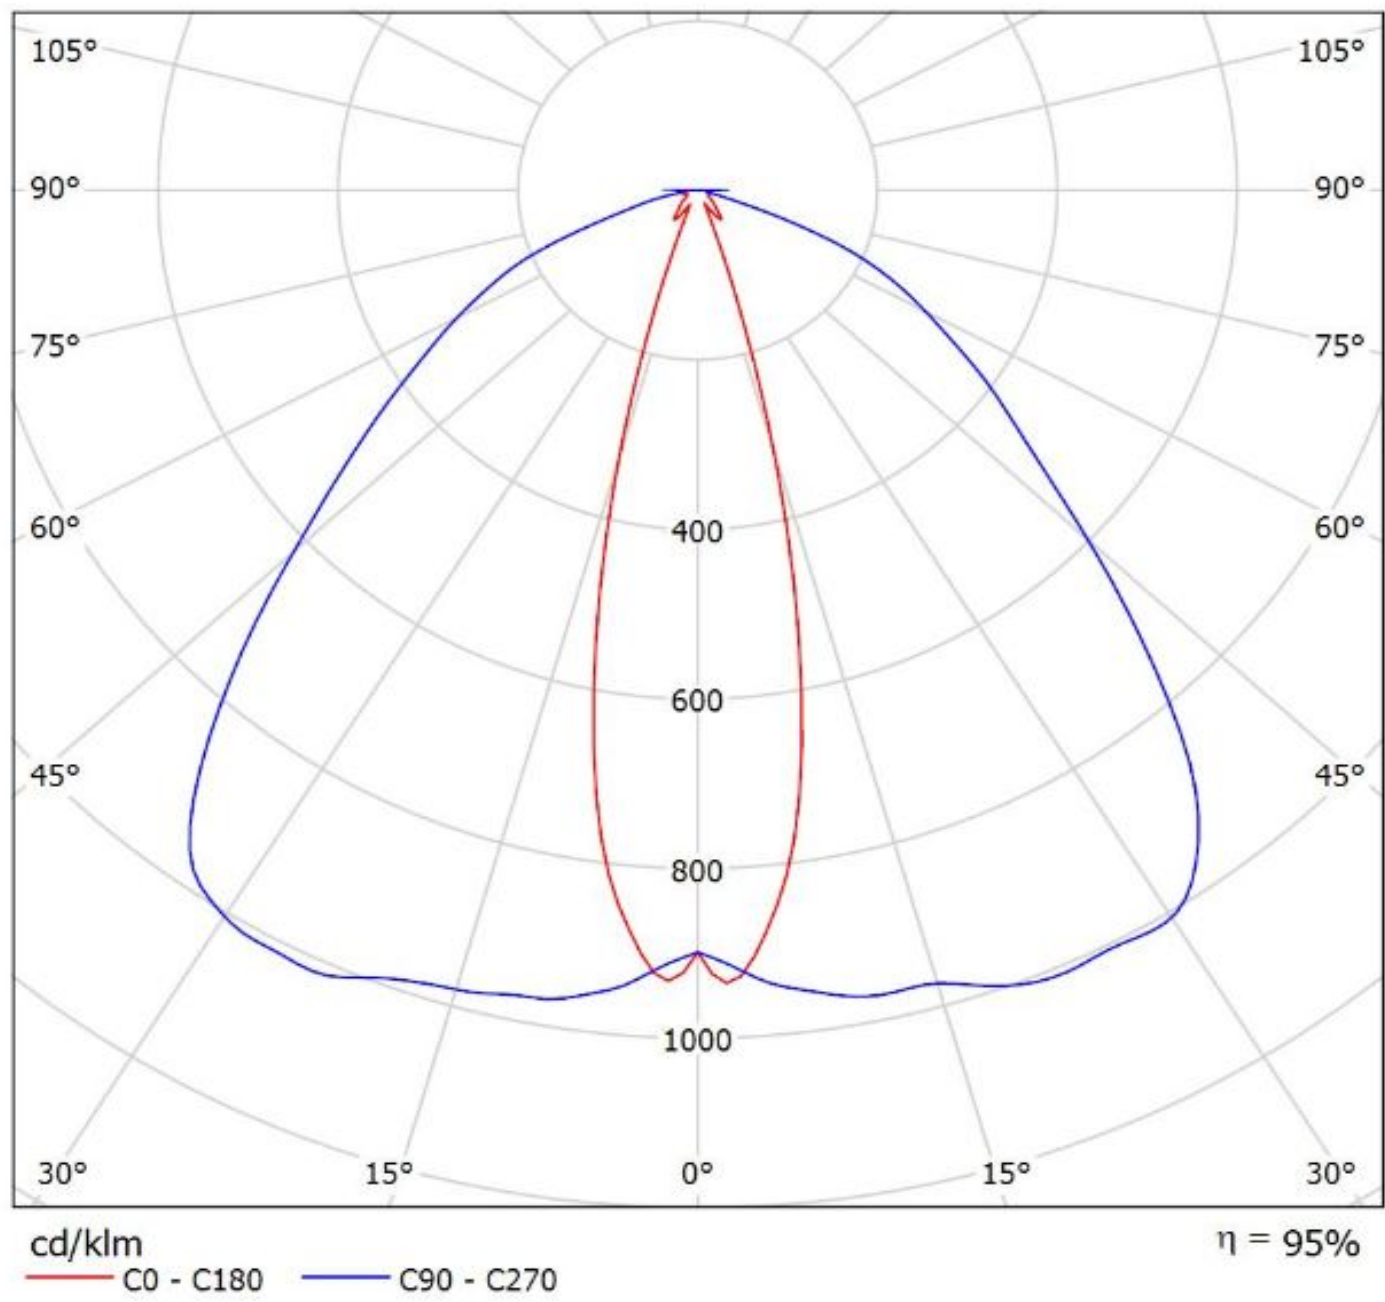

Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_Fortimo FastFlex LED board 2x6 DP G4
Lamps: 1 x Fortimo FastFlex LED board 2x6 DP G4

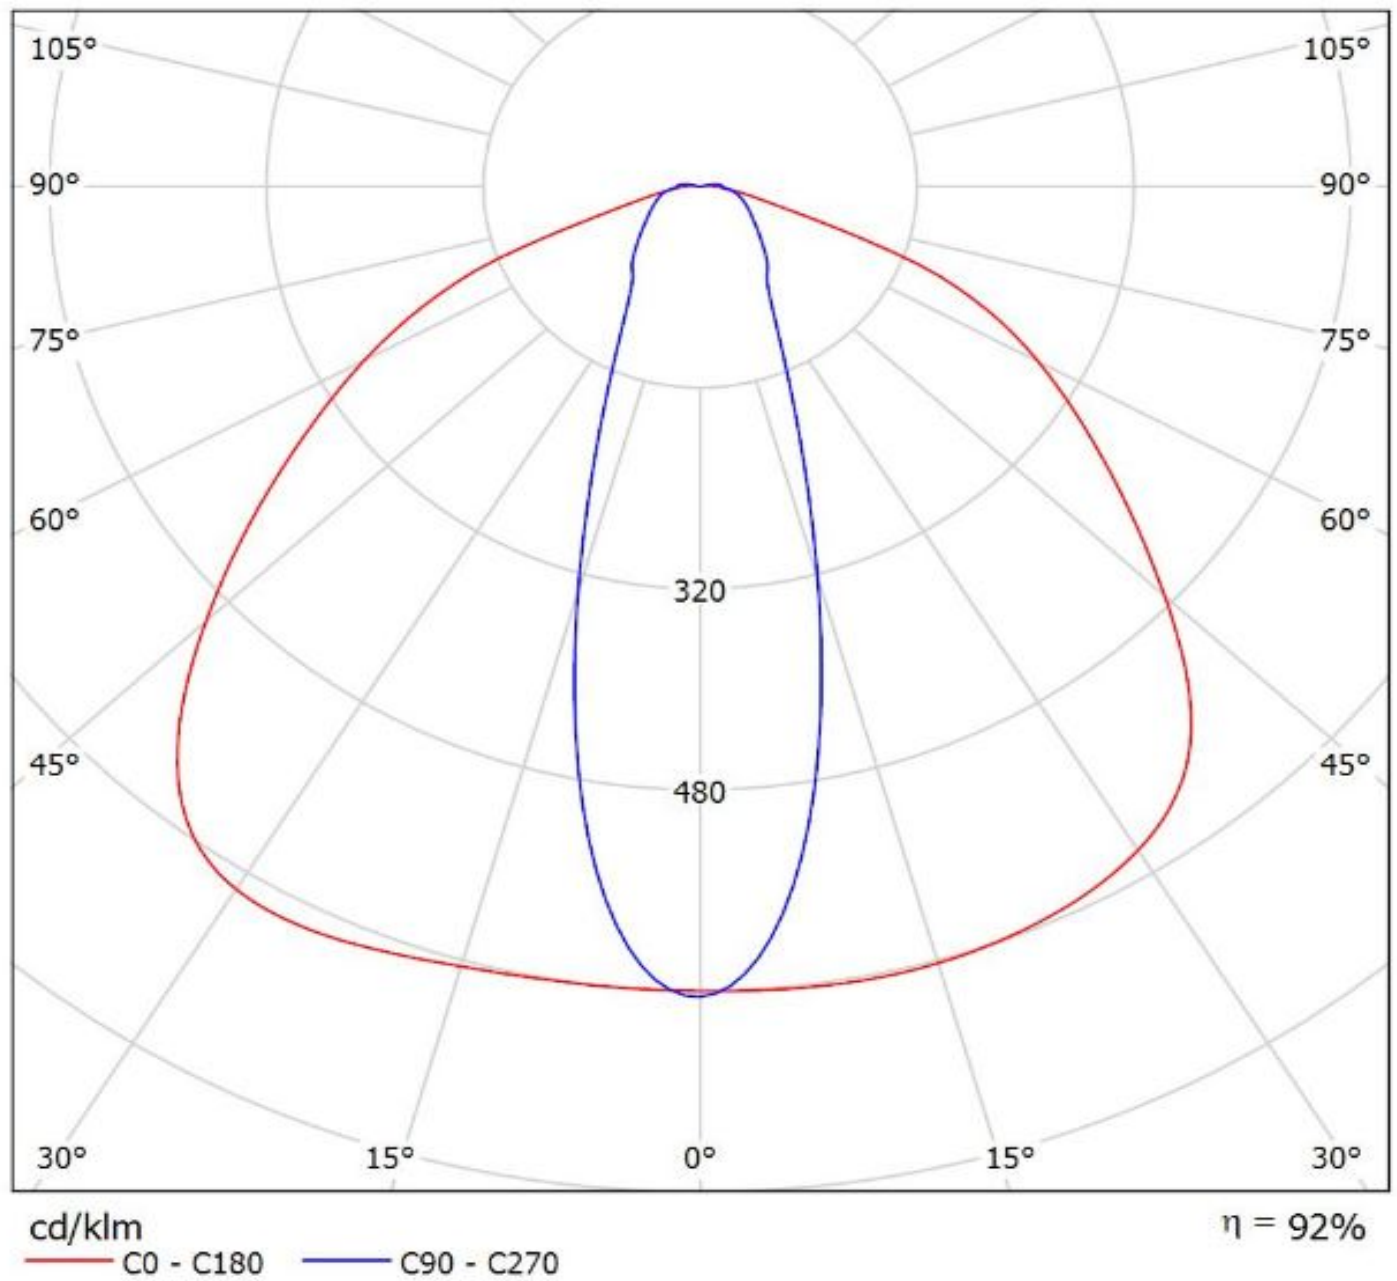


Luminaire: Ledil CS14597_HB-IP-2x6-O_Fortimo FastFlex LED board 2x6 DPX G4
Lamps: 1 x Fortimo FastFlex LED board 2x6 DPX G4

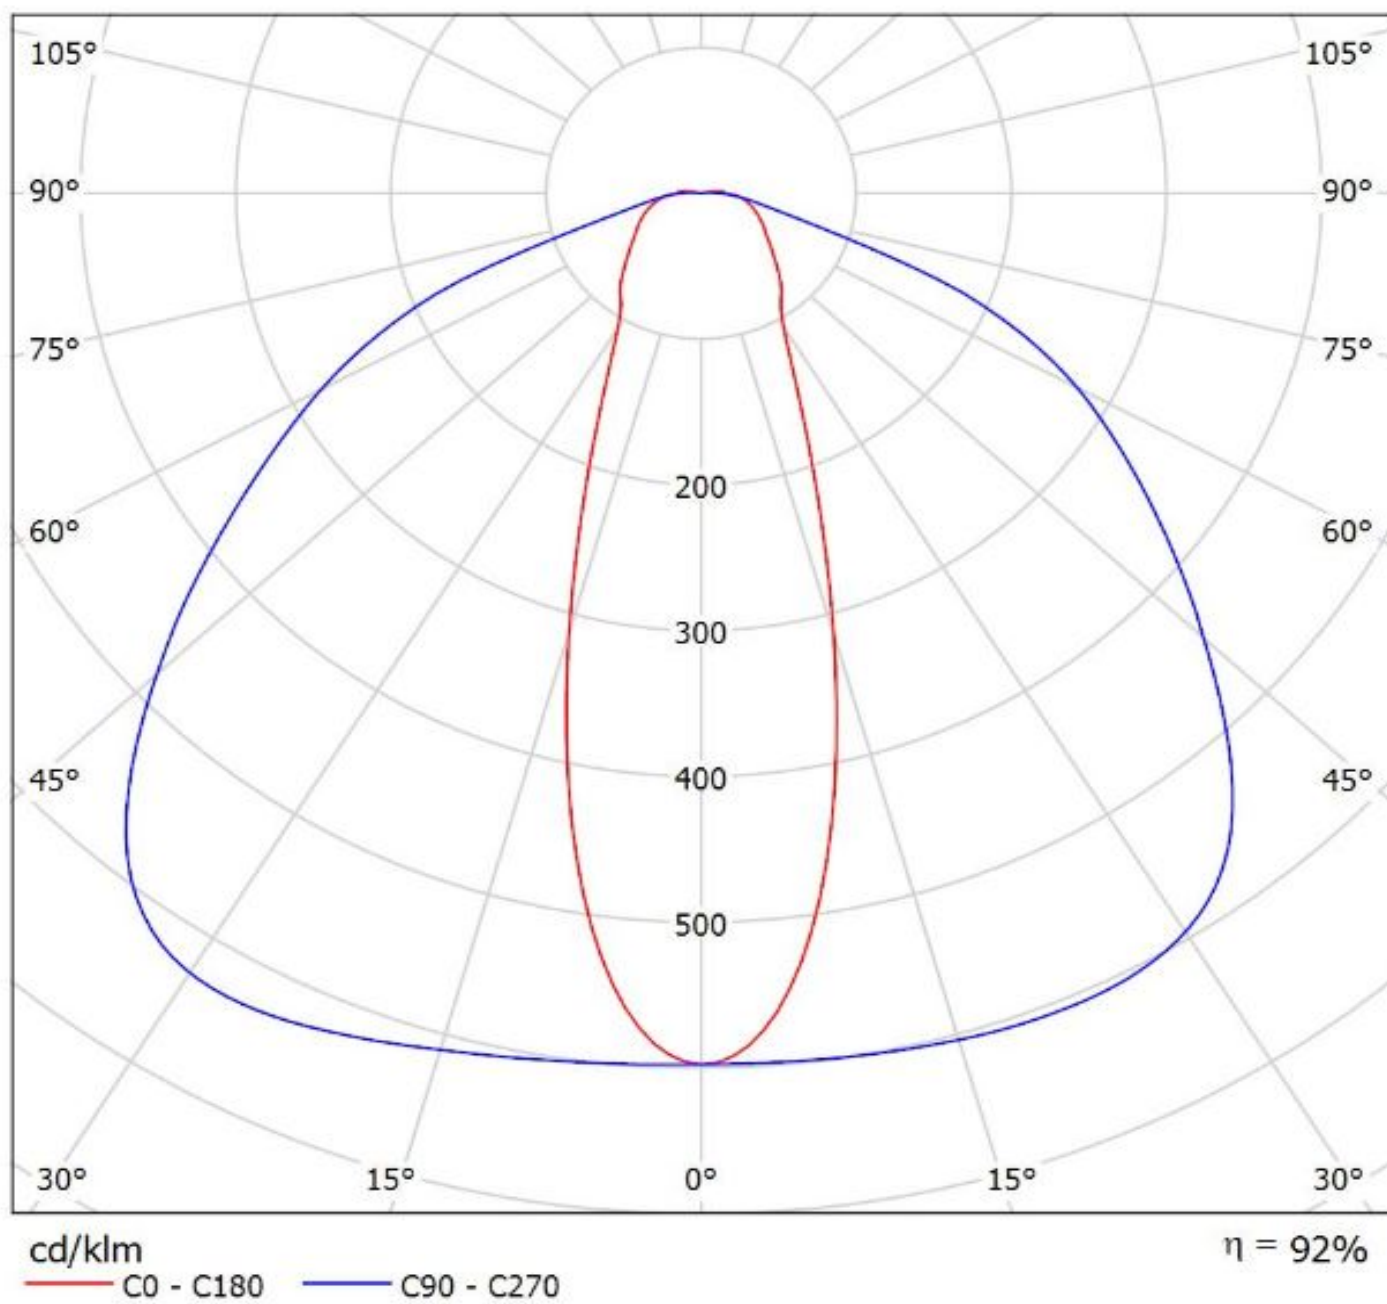


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(LH351Z)

Lamps: 1 x Samsung_LH351Z_(2X6)_951.129lm@250mA_P=8.7495W_I=0.2499A

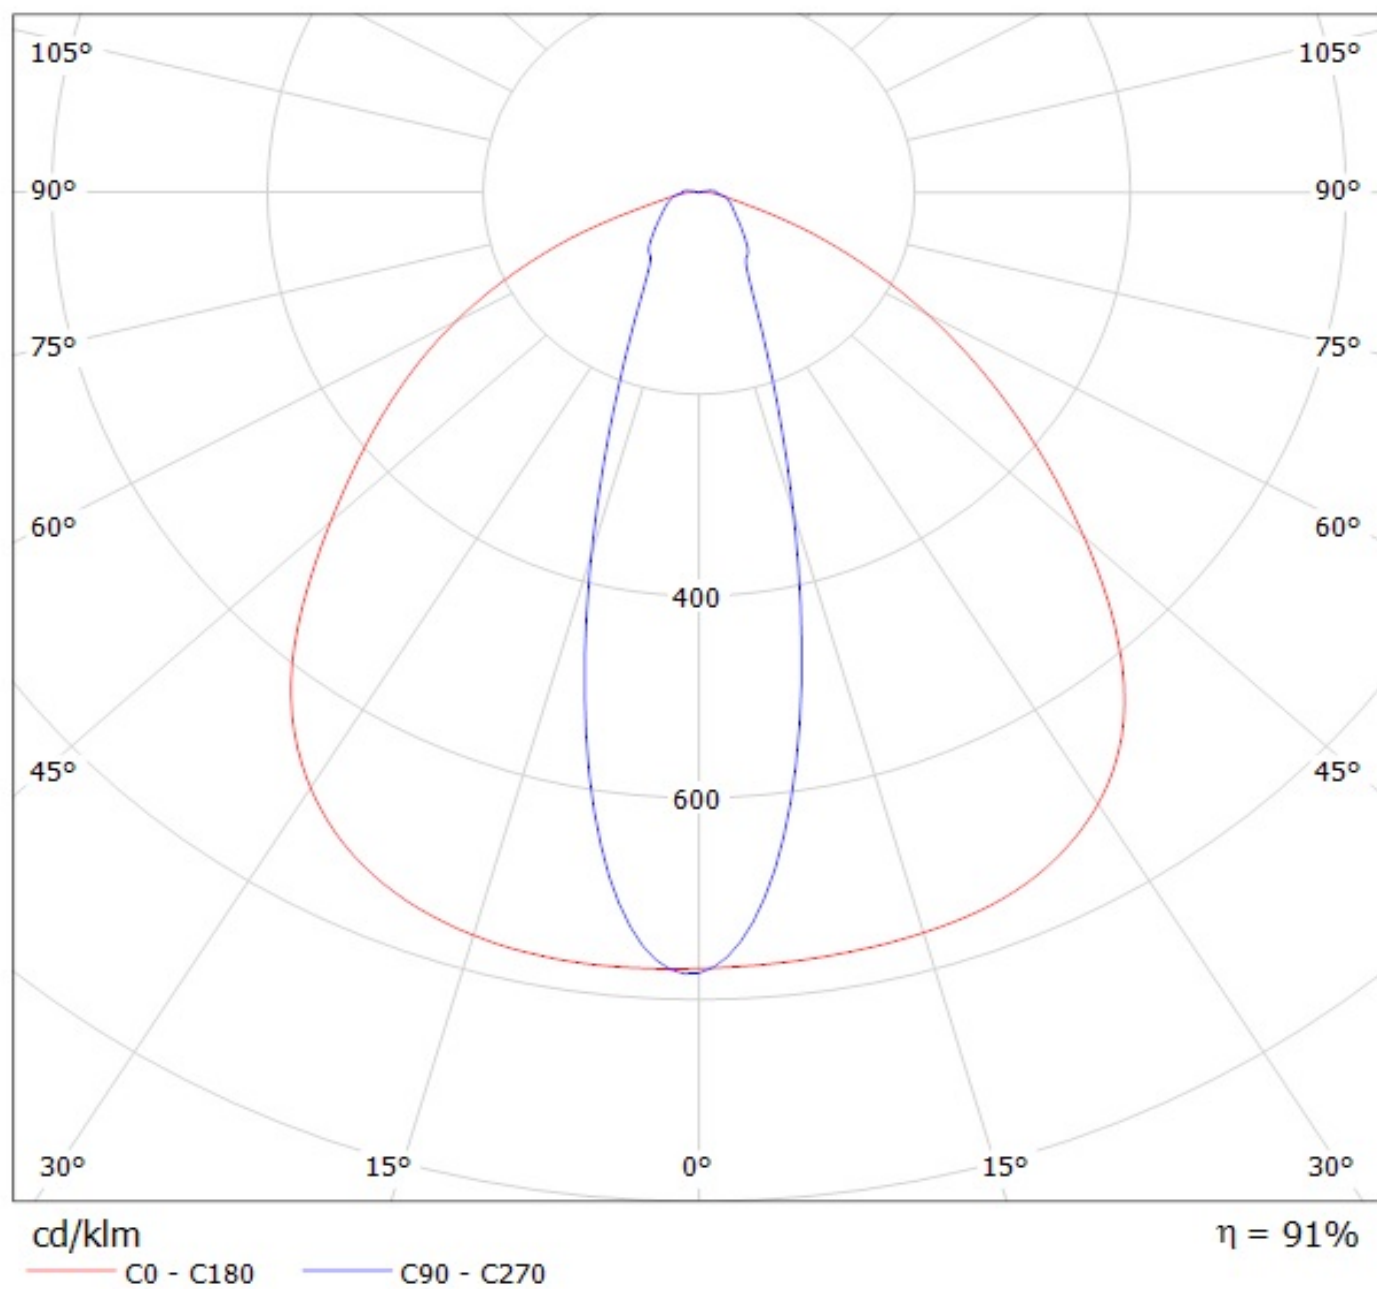


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(Z5M1)

Lamps: 1 x Seoul_Z5M1_(2x6)_(SZ5-M1-WW-C8)_1165.11lm@250mA_P=8.58881W_I=0.2499A

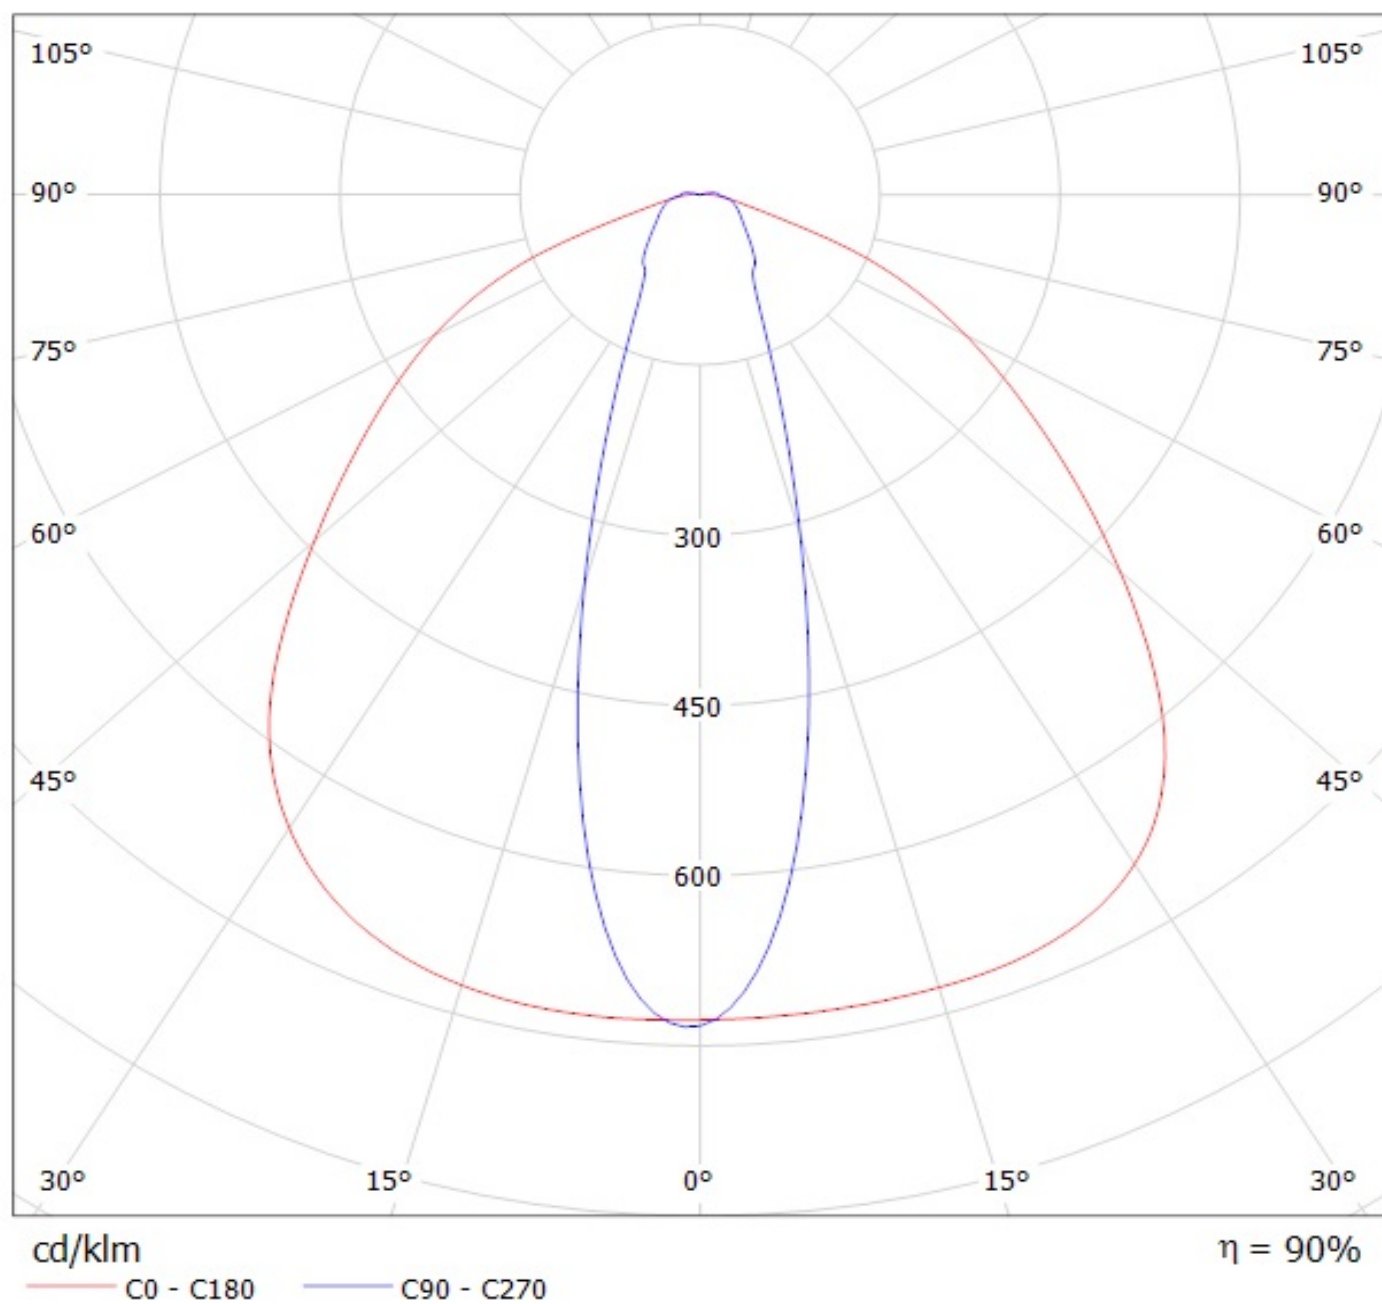


Luminaire: Ledil CS14597_HB-IP-2X6-O_(Z8Y22_PLUS)


Lamps: 1 x Seoul_Z8Y22_PLUS_2X6_(SZ8-Y22-W0-C7P)1489.65lm@250mA_P=8.30675W_I=0.250A

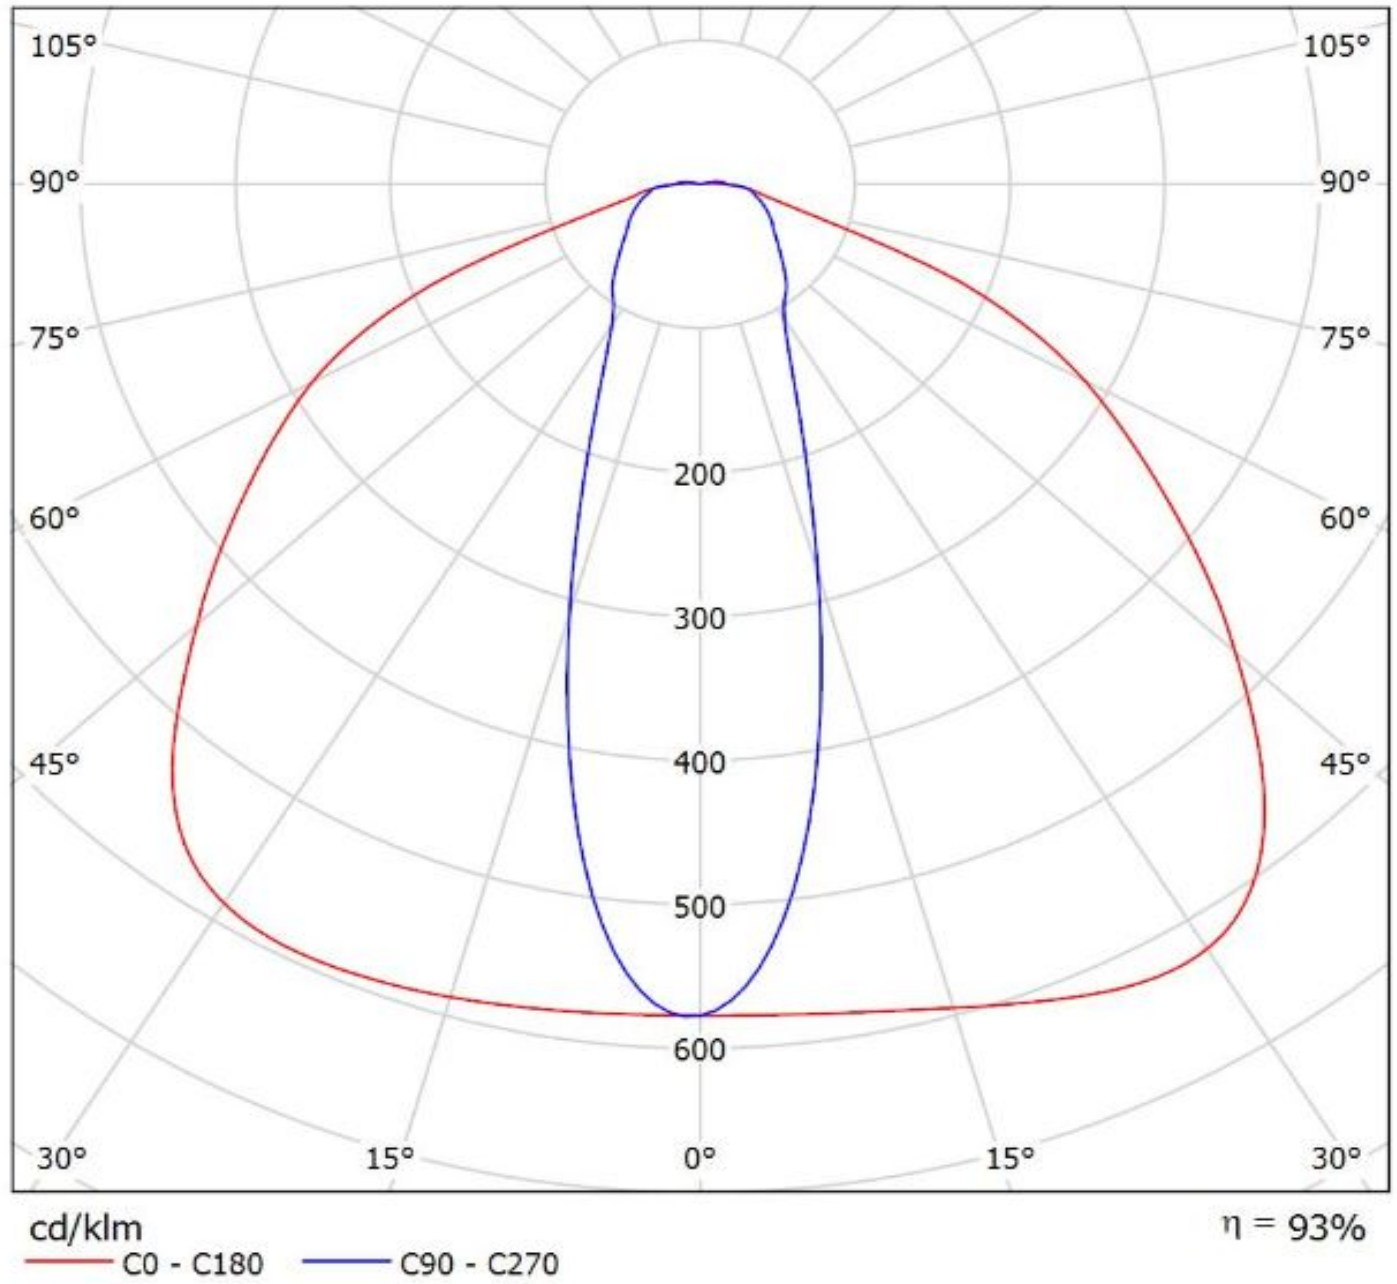

Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(SMJQ-D36W12Mx)
Lamps: 1 x Seoul_SMJQ-D36W12Mx_3765.02@700mA_P=23.6218W_I=0.25A

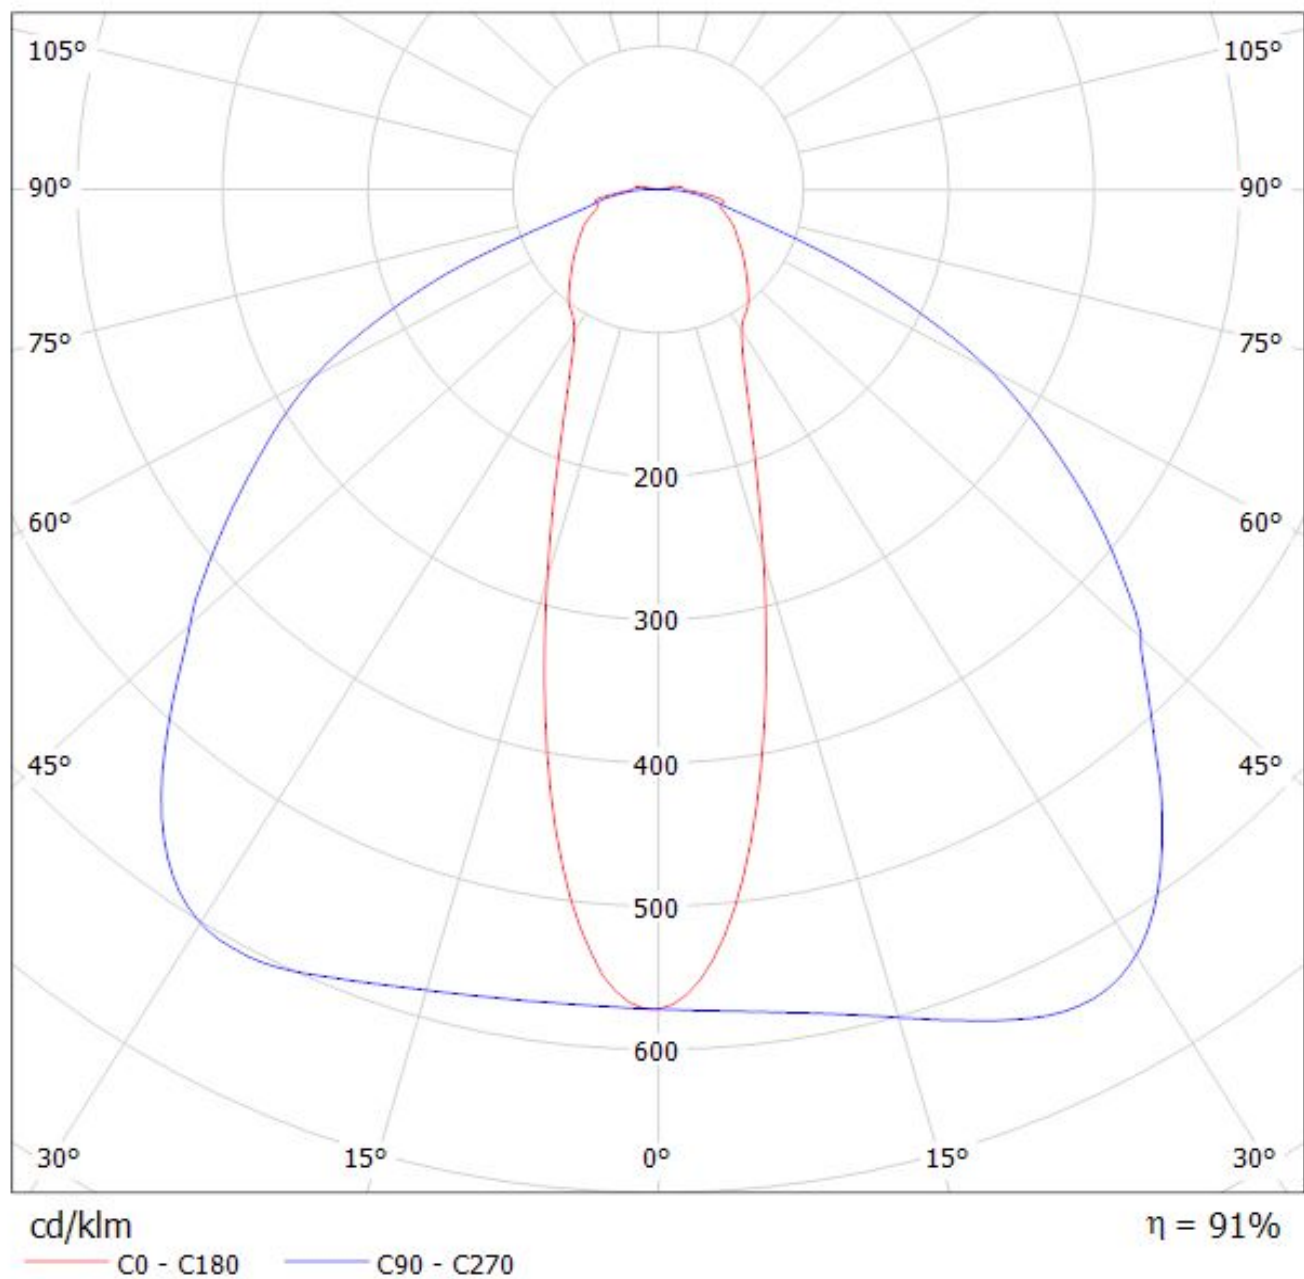


Luminaire: LEDiL Oy CS14597_HB-IP-2X6-O_(SMJQ-D36W12Px)
Lamps: 1 x Seoul_SMJQ-D36W12Px_1404.92lm@250mA_P=8.22866W_I=0.25A

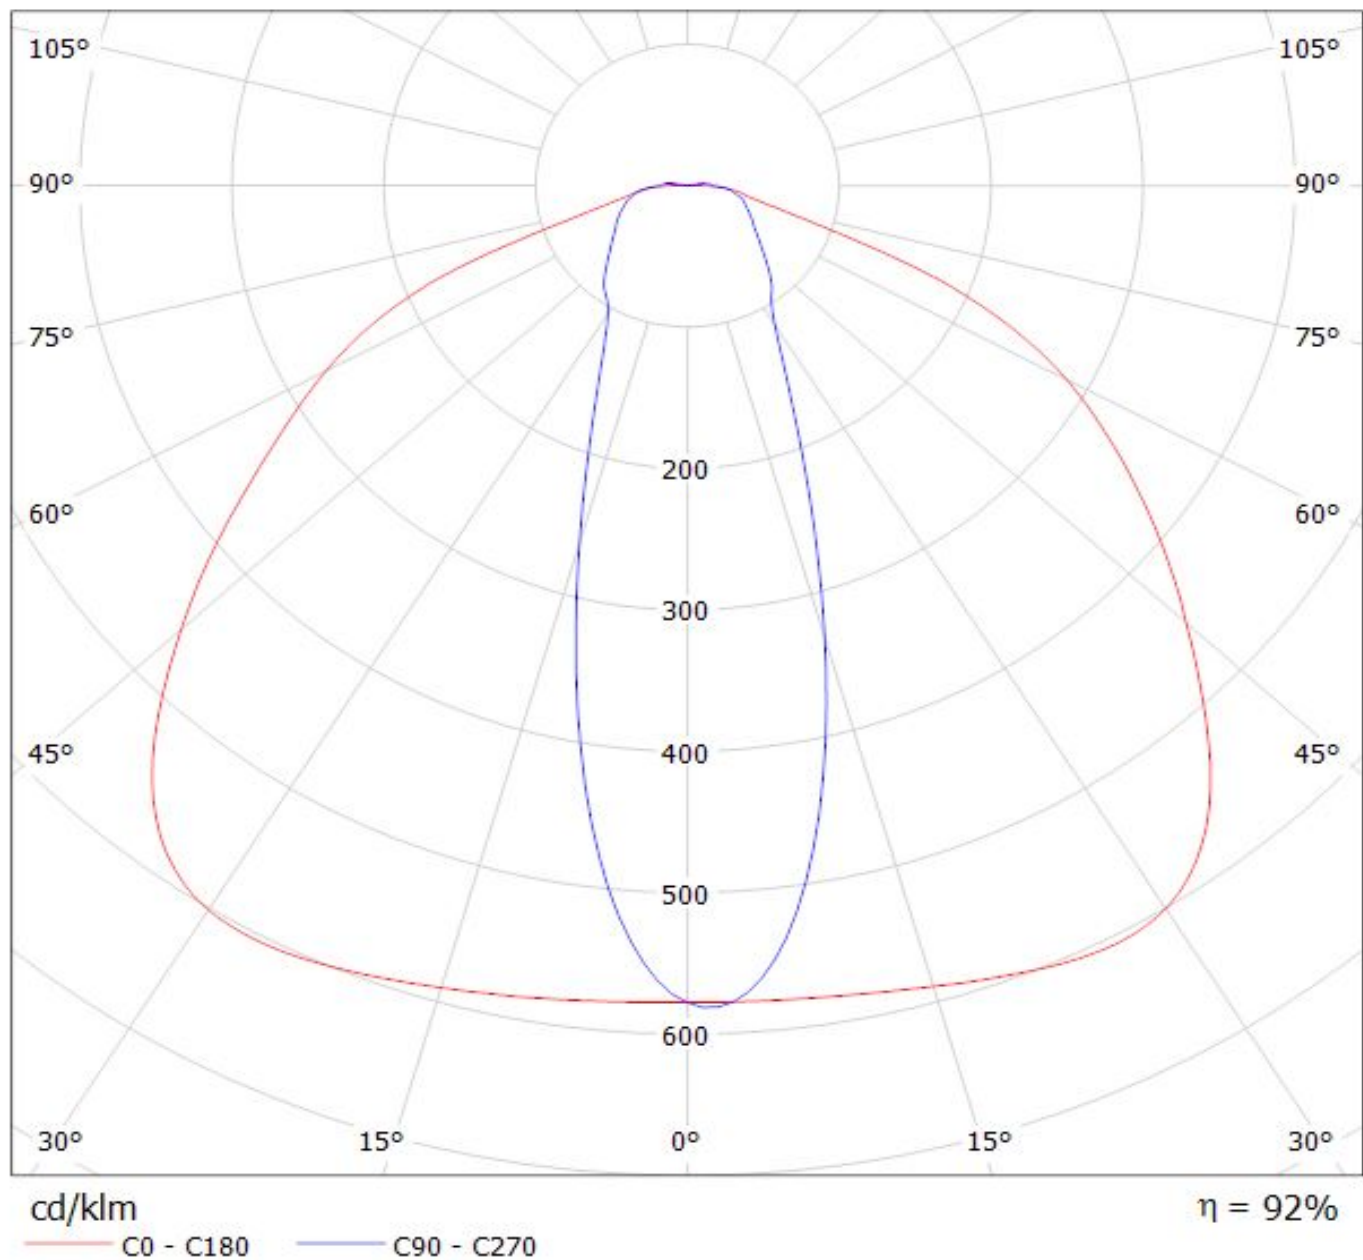

Ledil CS14597_HB-IP-2X6-O_(TL1L4) / LDC (Polar)

Luminaire: Ledil CS14597_HB-IP-2X6-O_(TL1L4)

Lamps: 1 x Toshiba_TL1L4_2x6_(TL1L4-DW0)_1346.96lm@250mA_CCT=6500K_P=8.5W_I=0.25A

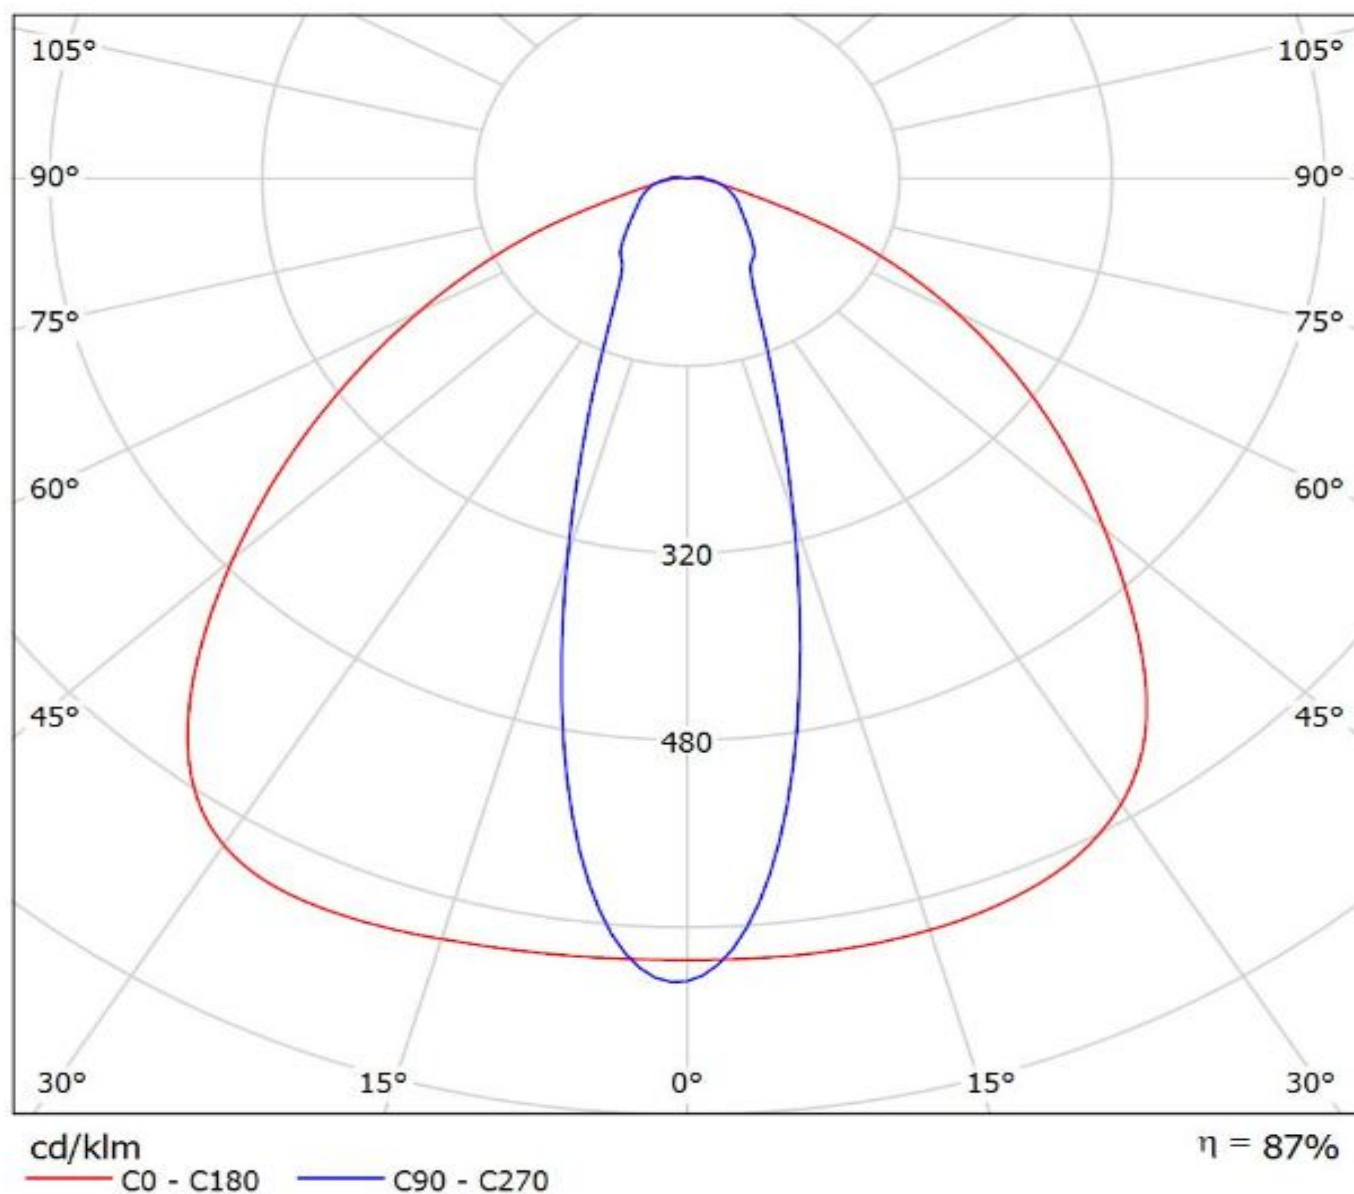

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.