



PRODUCT DATASHEET

Stradella series

last update 12/2/2018


DETAILS

Product Number	CS16034_STRADELLA-IP-28-T2
Family	Stradella
Type	Assembly
Color	clear
Diameter	100*100 mm
Height	9,2 mm
Style	square
Optic Material	PMMA
Holder Material	
Fastening	screw
Status	production ready
ROHS Compliant	Yes
Date Updated	12/02/2018



OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Efficiency	cd/lm	Connector
XP-G3	sim: Asymmetric	Asymmetric	sim: 91 %	sim: 0.420	-
XT-E	Asymmetric deg	Asymmetric	94 %	0.620	-
LG 3528	sim: Asymmetric	Asymmetric	sim: 94 %	sim: 0.550	-
LUXEON 3030 2D	Asymmetric deg	Asymmetric	94 %	0.840	-
NF2x757G	sim: Asymmetric	Asymmetric	sim: 94 %	sim: 0.710	-
NVSxE21A	sim: Asymmetric	Asymmetric	sim: 92 %	sim: 0.760	-
Duris S5 (2 chip)	Asymmetric deg	Asymmetric	94 %	0.710	-

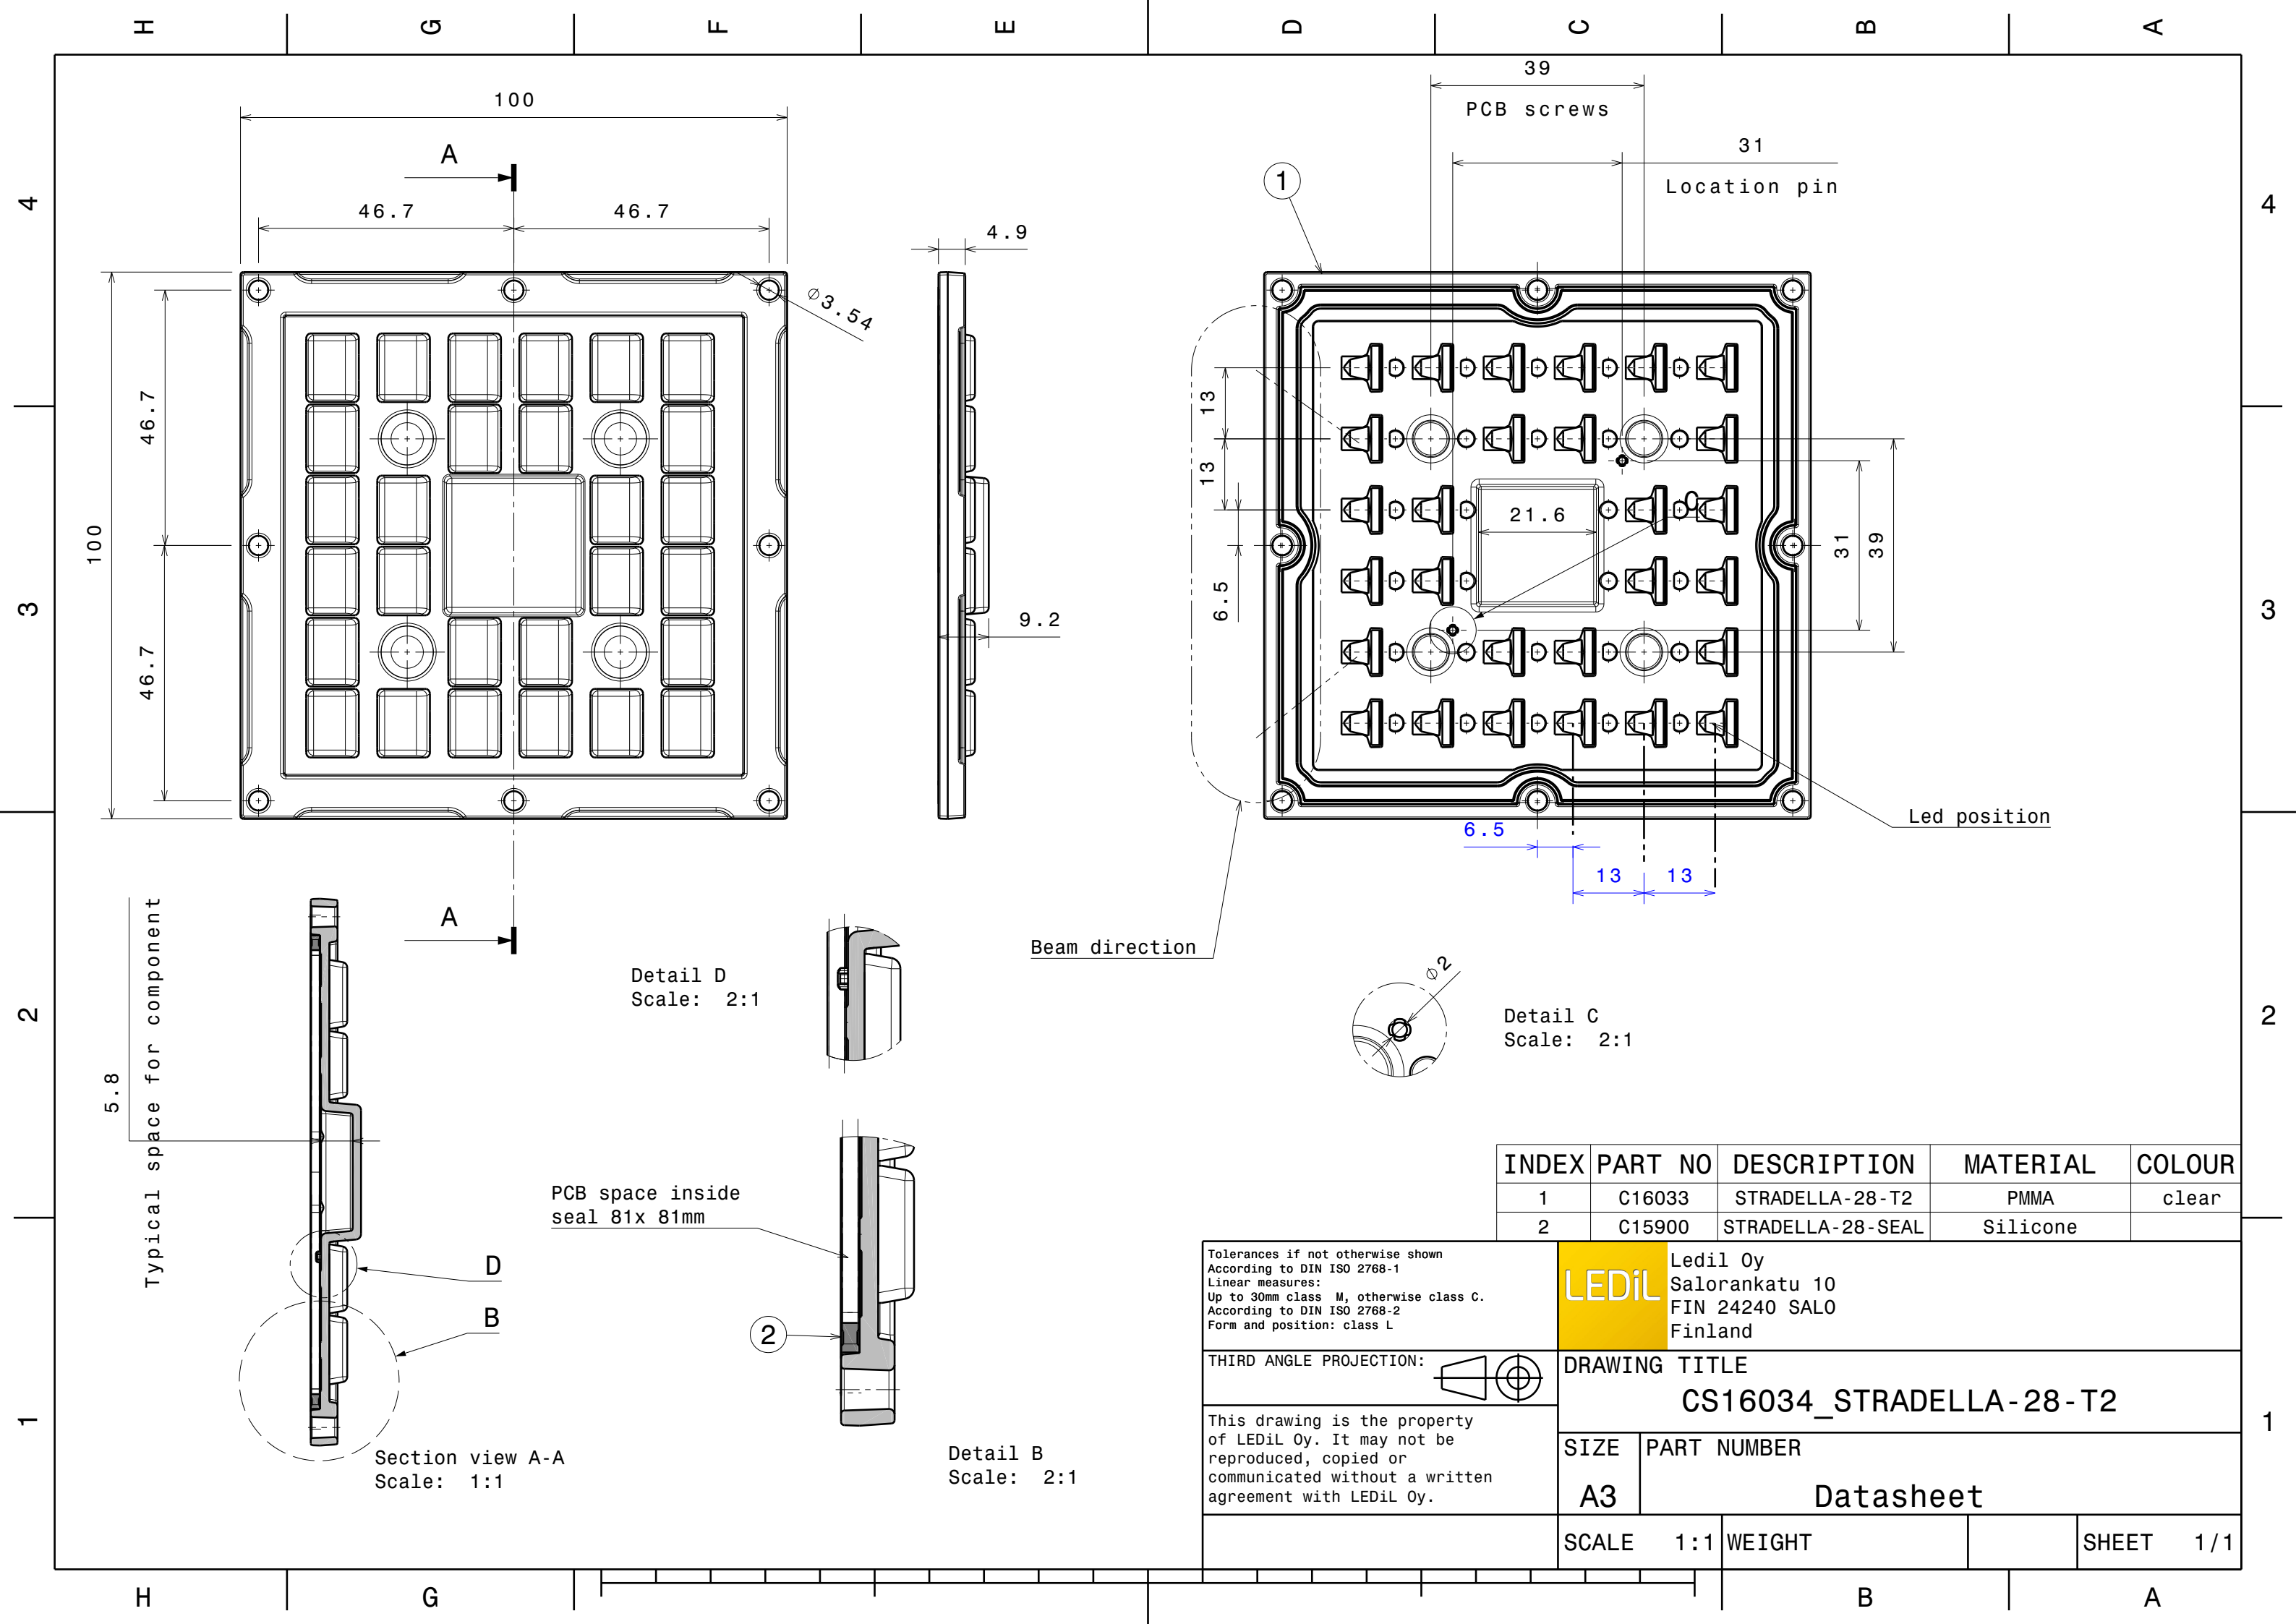

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	C16033	STRADELLA-28-T2	PMMA	clear
2	C15900	STRADELLA-28-SEAL	Silicone	

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures:
Up to 30mm class M, otherwise class C.
According to DIN ISO 2768-2
Form and position: class L

THIRD ANGLE PROJECTION:

This drawing is the property
of LEDiL Oy. It may not be
reproduced, copied or
communicated without a written
agreement with LEDiL Oy.

LEDiL

Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland

DRAWING TITLE

CS16034_STRADELLA-28-T2

SIZE

A3

PART NUMBER

Datasheet

SCALE


1:1

WEIGHT

SHEET


1/1

Luminaire: Ledil Oy CS16034_STRADELLA-IP-28-T2_(XP-G3)_SIMULATED
Lamps: 1 x Cree XP-G3

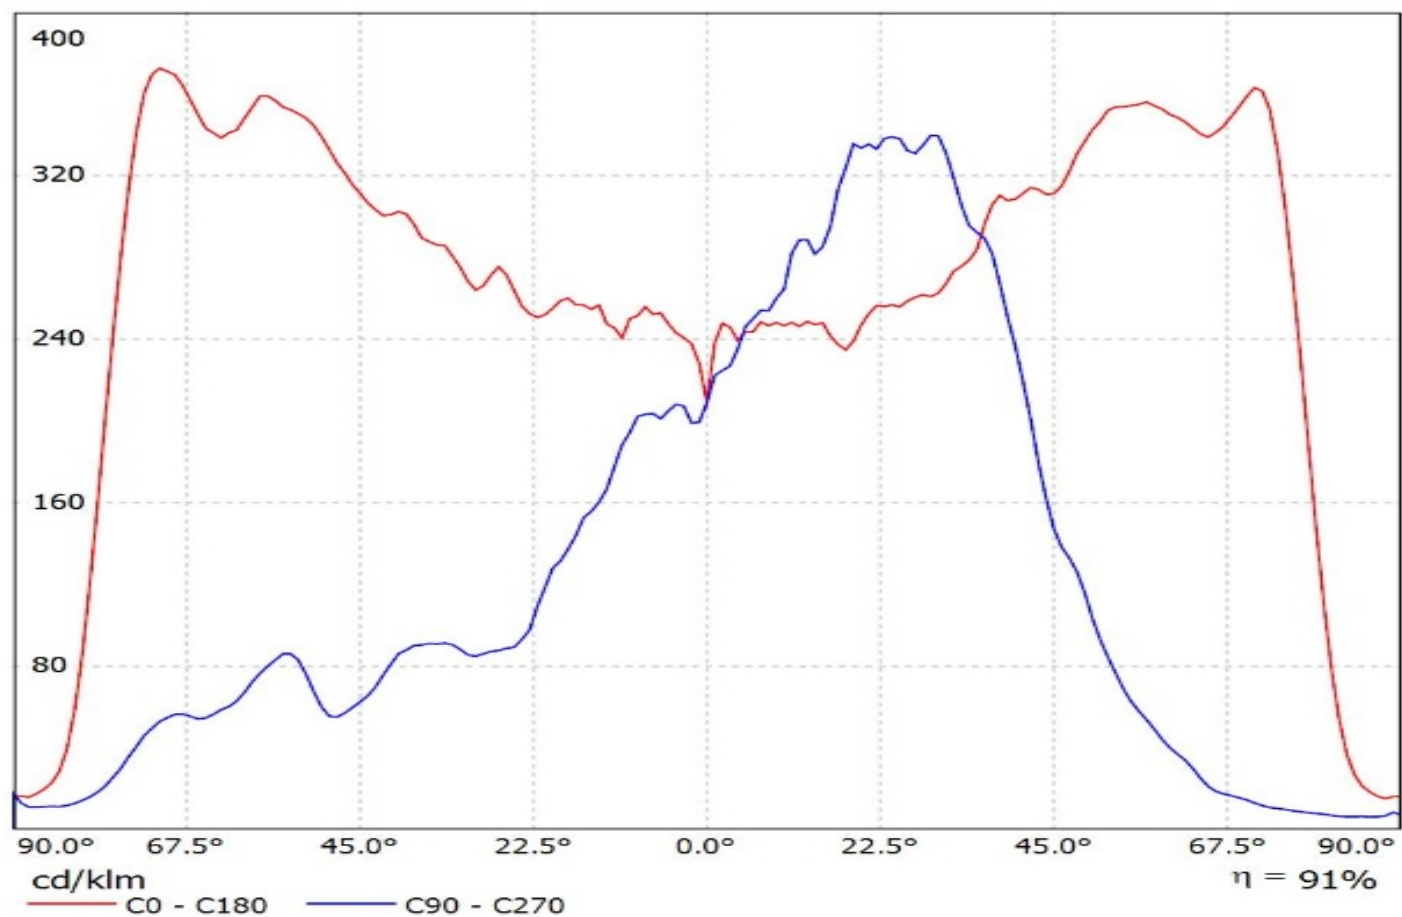


Luminaire: Ledil CS16034_STRADELLA-IP-28-T2_(XT-E)


Lamps: 1 x Cree_XT-E_Stradella-28_1802.62lm@250mA_CCT=5700K_P=9.5072W_U=38.110V

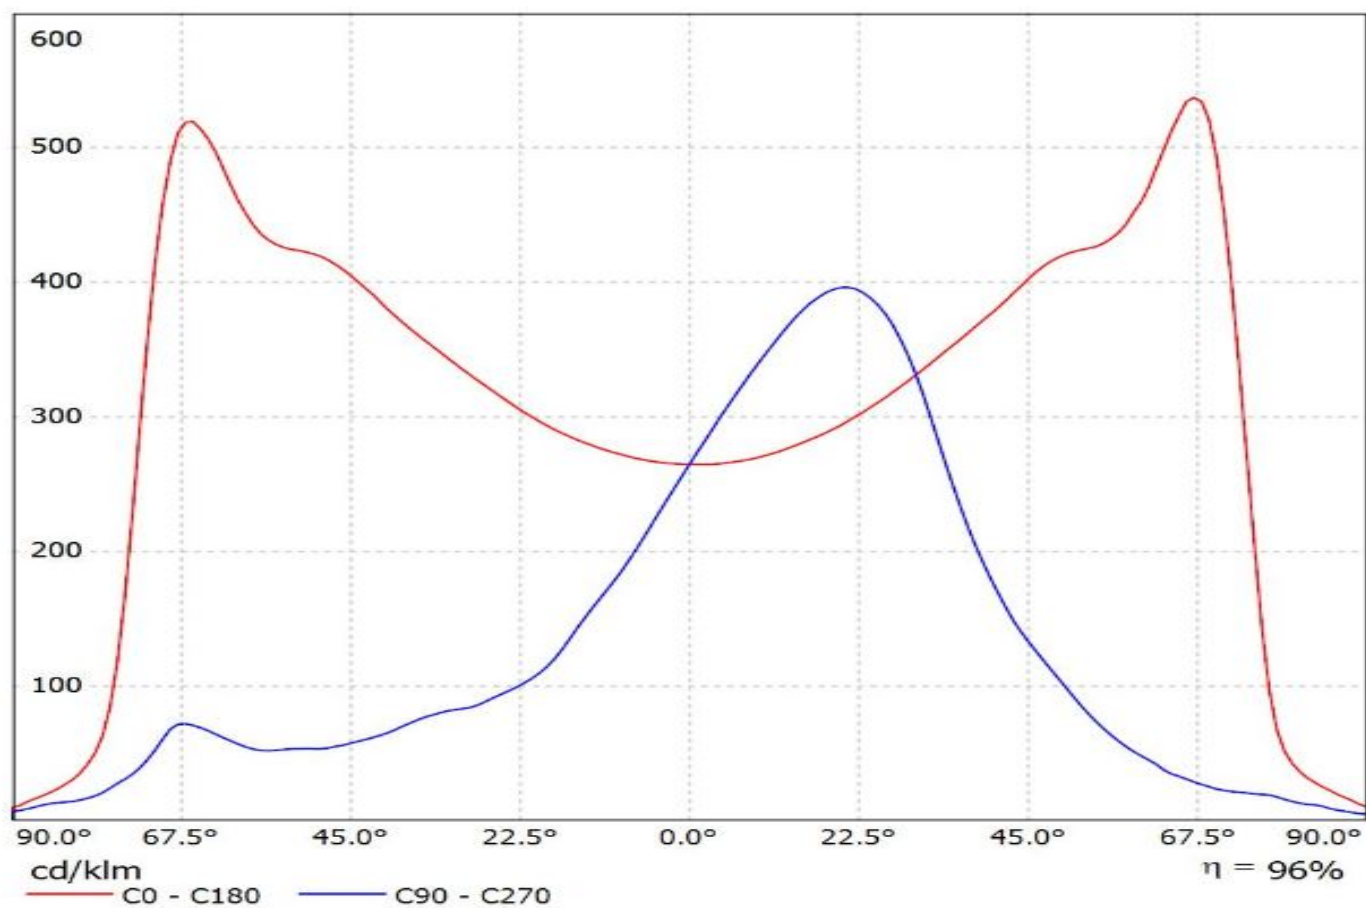

Luminaire: Ledil Oy CS16034_STRADELLA-IP-28-T2_(LG_3528)_SIMULATED
Lamps: 1 x LG 3528

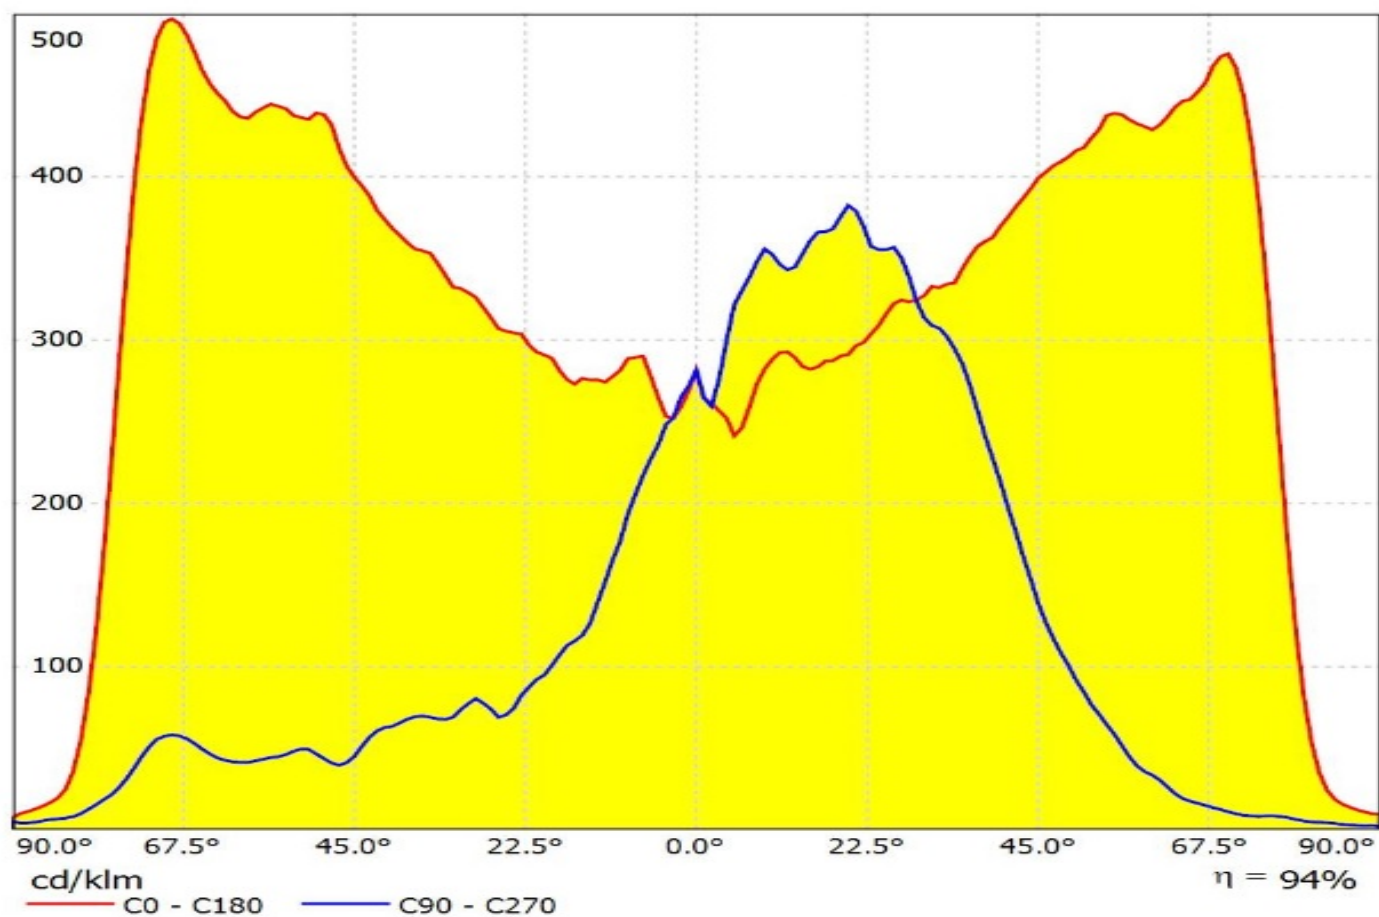


Luminaire: Ledil CS16034_STRADELLA-IP-28-T2_(Luxeon_3030_2D)
Lamps: 1 x Lumileds_Luxeon_3030_2D_1132.31lm@240mA_P=9.57624W_U=39.901V

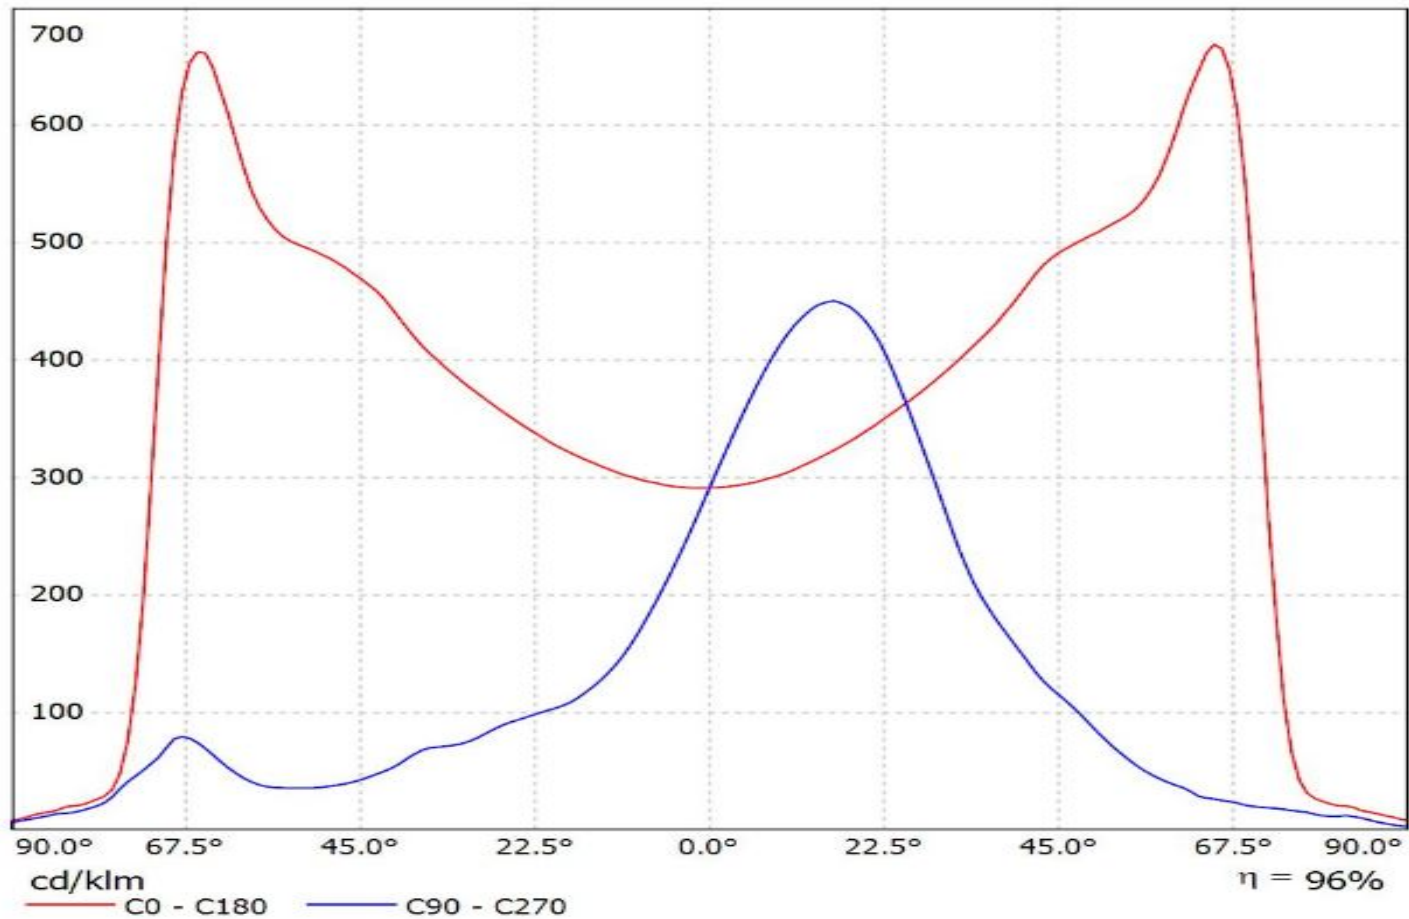


Luminaire: LEDiL Oy CS16034_STRADELLA-IP-28-T2_(NF2x757G)


Lamps: 1 x Nichia_NF2x757G_(NF2L757GRT-V1)_1005.33lm@150mA_P=5.81972W_U=38.824V

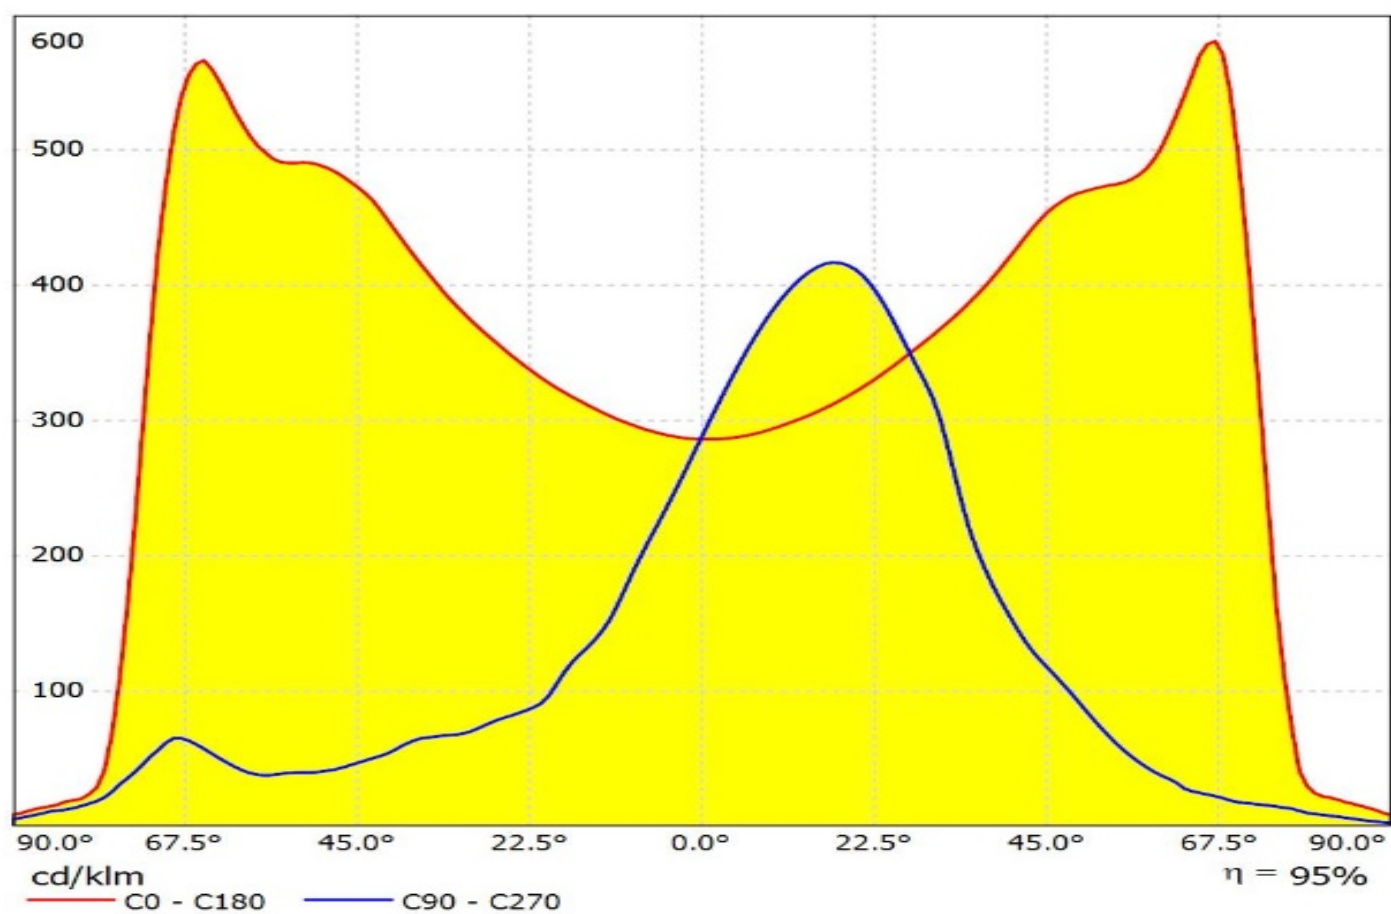


Luminaire: Ledil Oy CS16034_STRADELLA-IP-28-T2_(NVSxE21A)_SIMULATED
Lamps: 1 x Nichia NVSWE21A

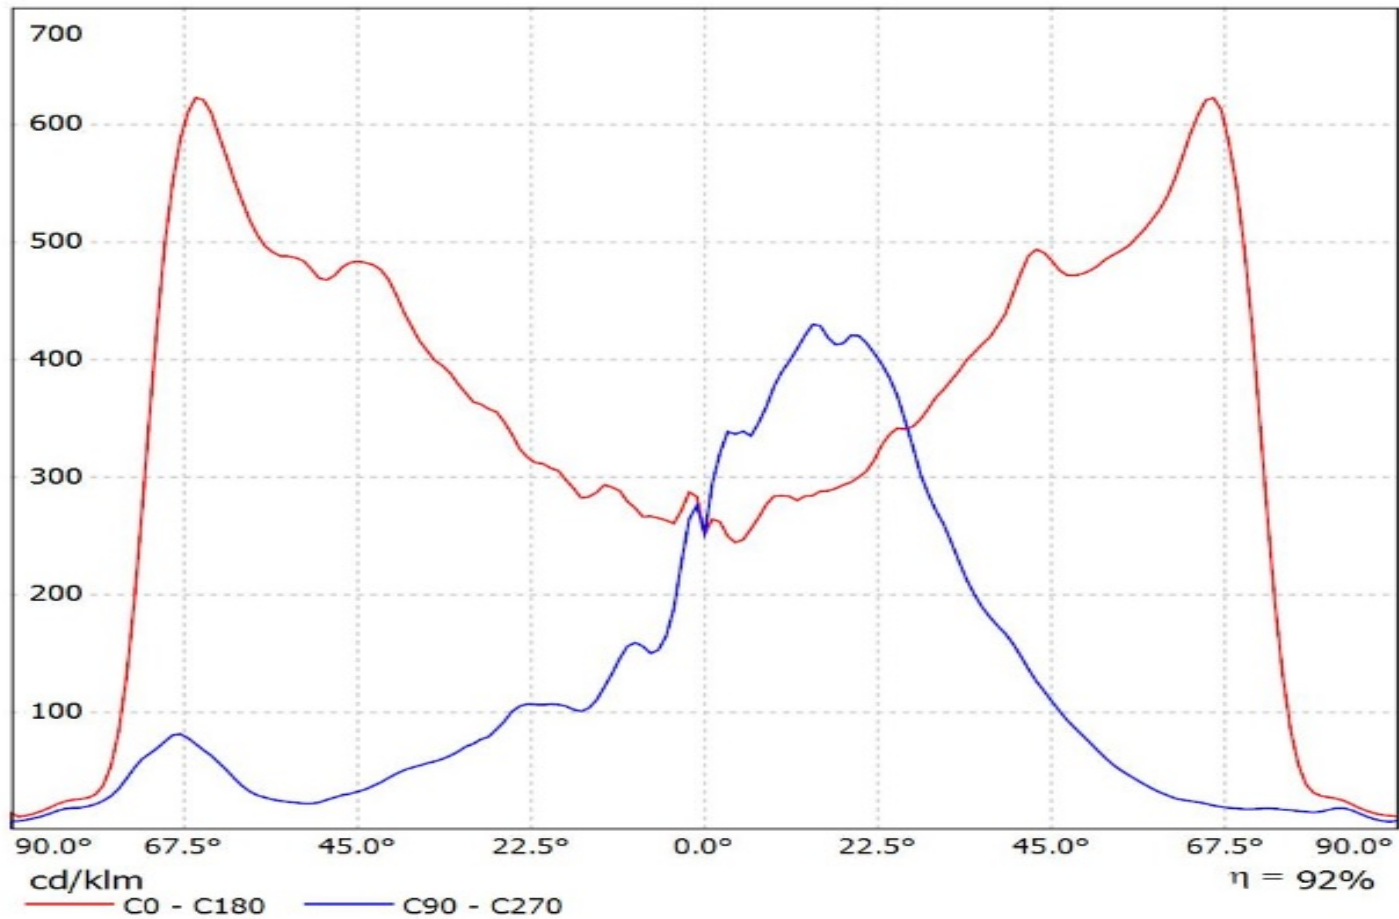

Luminaire: Ledil CS16034_STRADELLA-IP-28-T2 (Duris_S5)
Lamps: 1 x Osram_Duris_S5_Stradella28 (GW_PSLR32.EM-JQJS-A333-1)
_786.457lm@250mA_P=4.90979W_I=0.250A

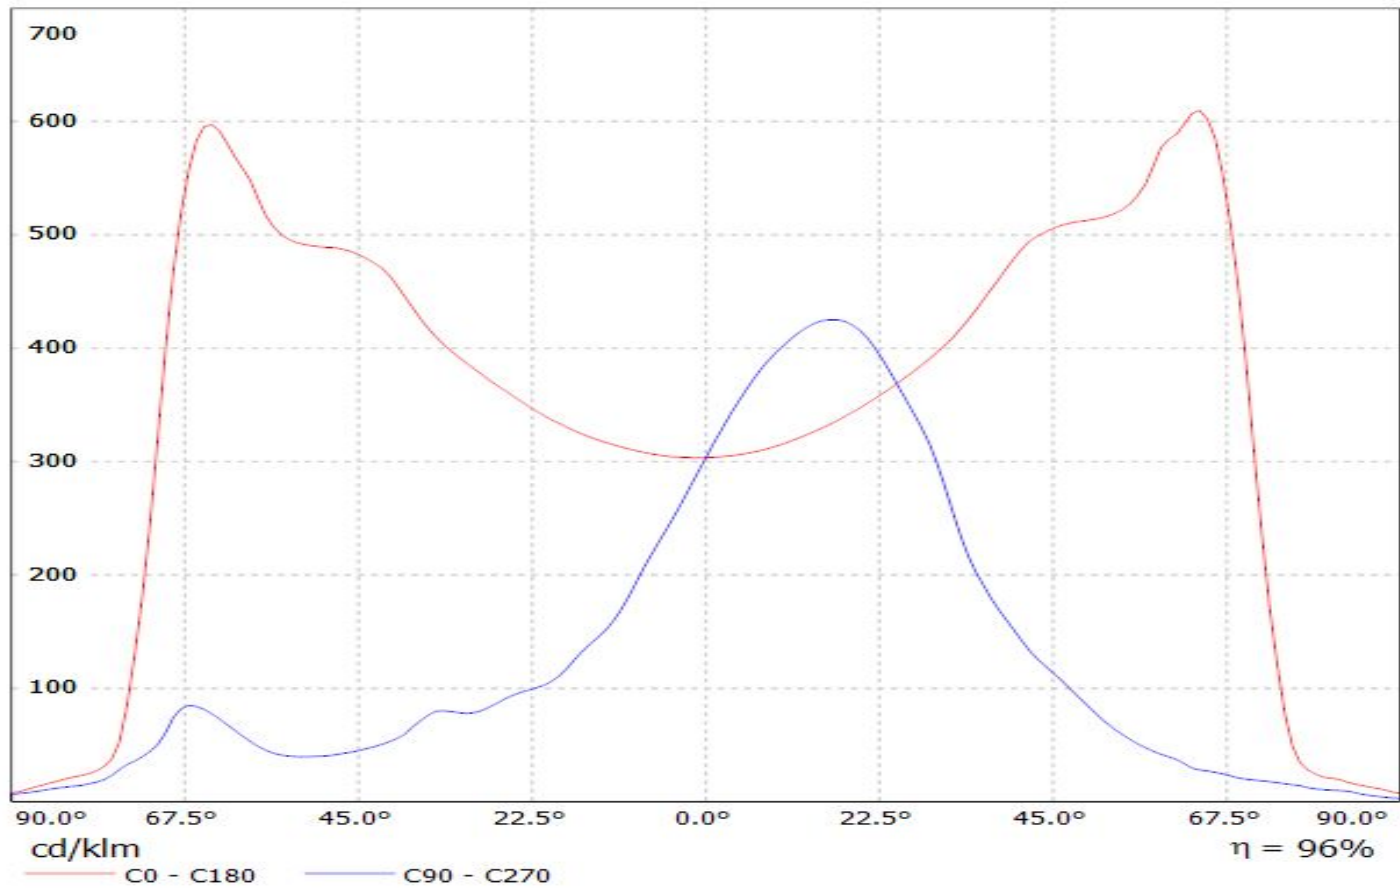


Luminaire: Ledil Oy CS16034_STRADELLA-IP-28-T2_(XP-G3)_SIMULATED
Lamps: 1 x Cree XP-G3

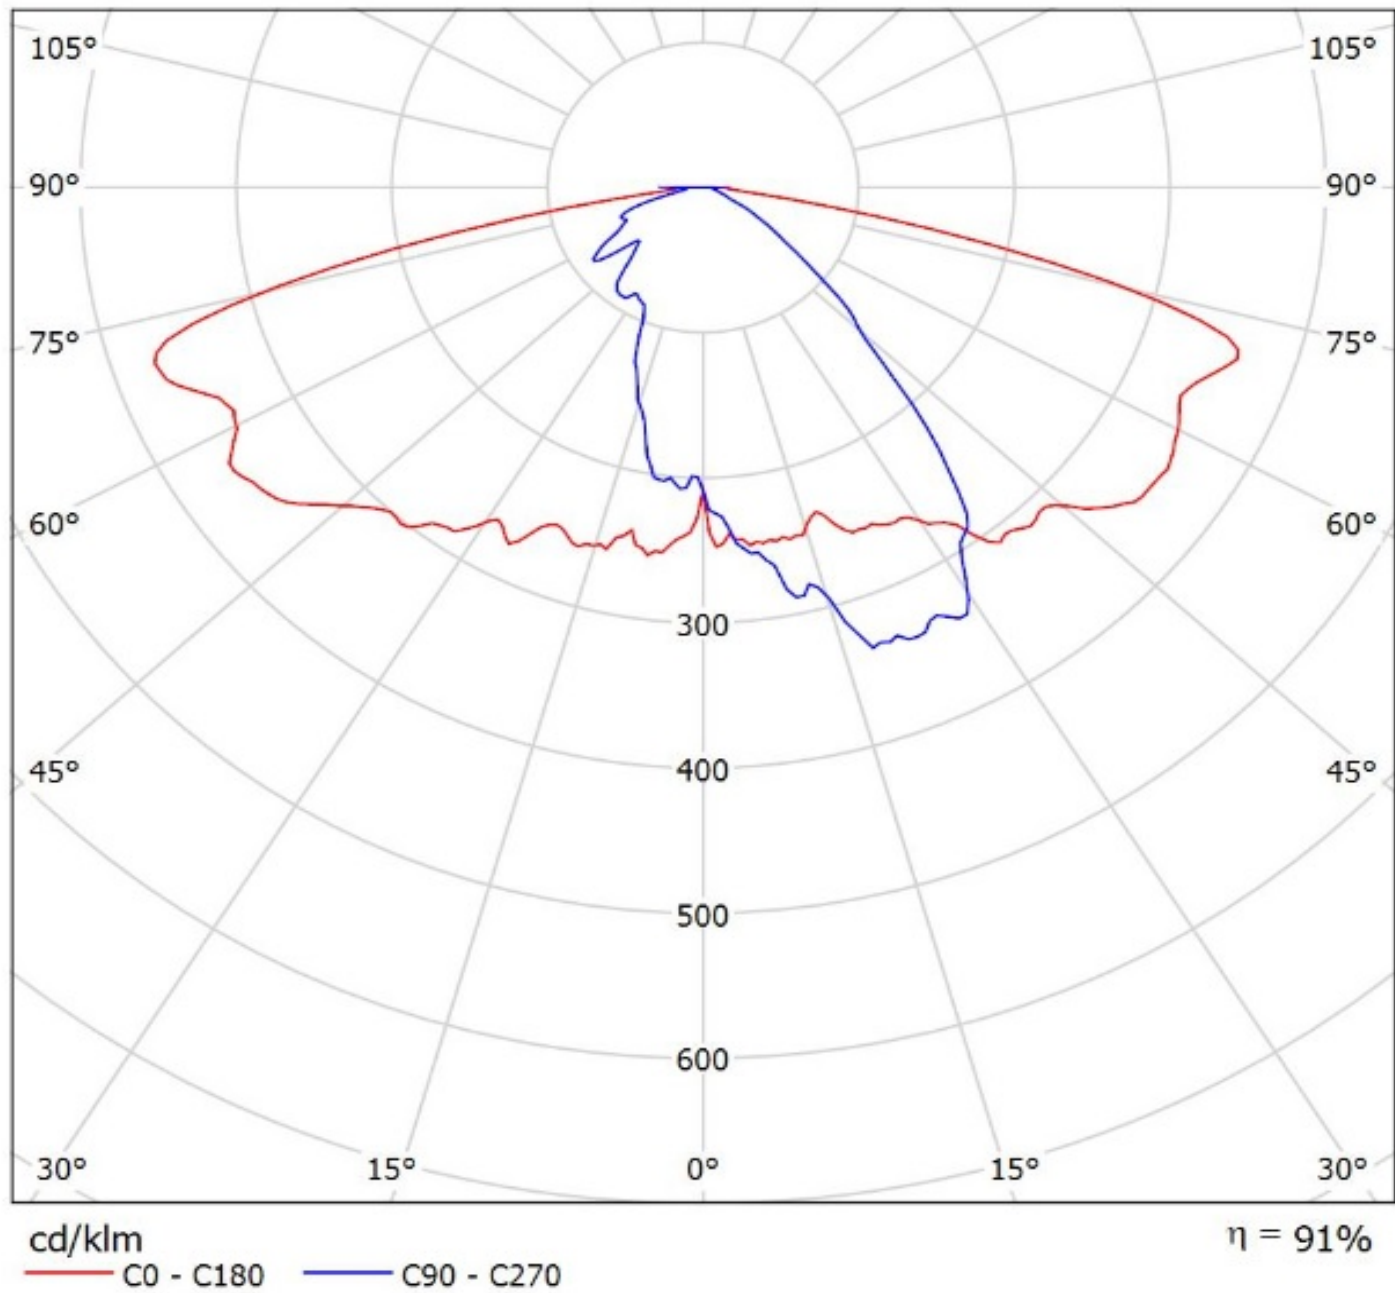

Luminaire: Ledil CS16034_STRADELLA-IP-28-T2_(XT-E)

Lamps: 1 x Cree_XT-E_Stradella-28_1802.62lm@250mA_CCT=5700K_P=9.5072W_U=38.110V

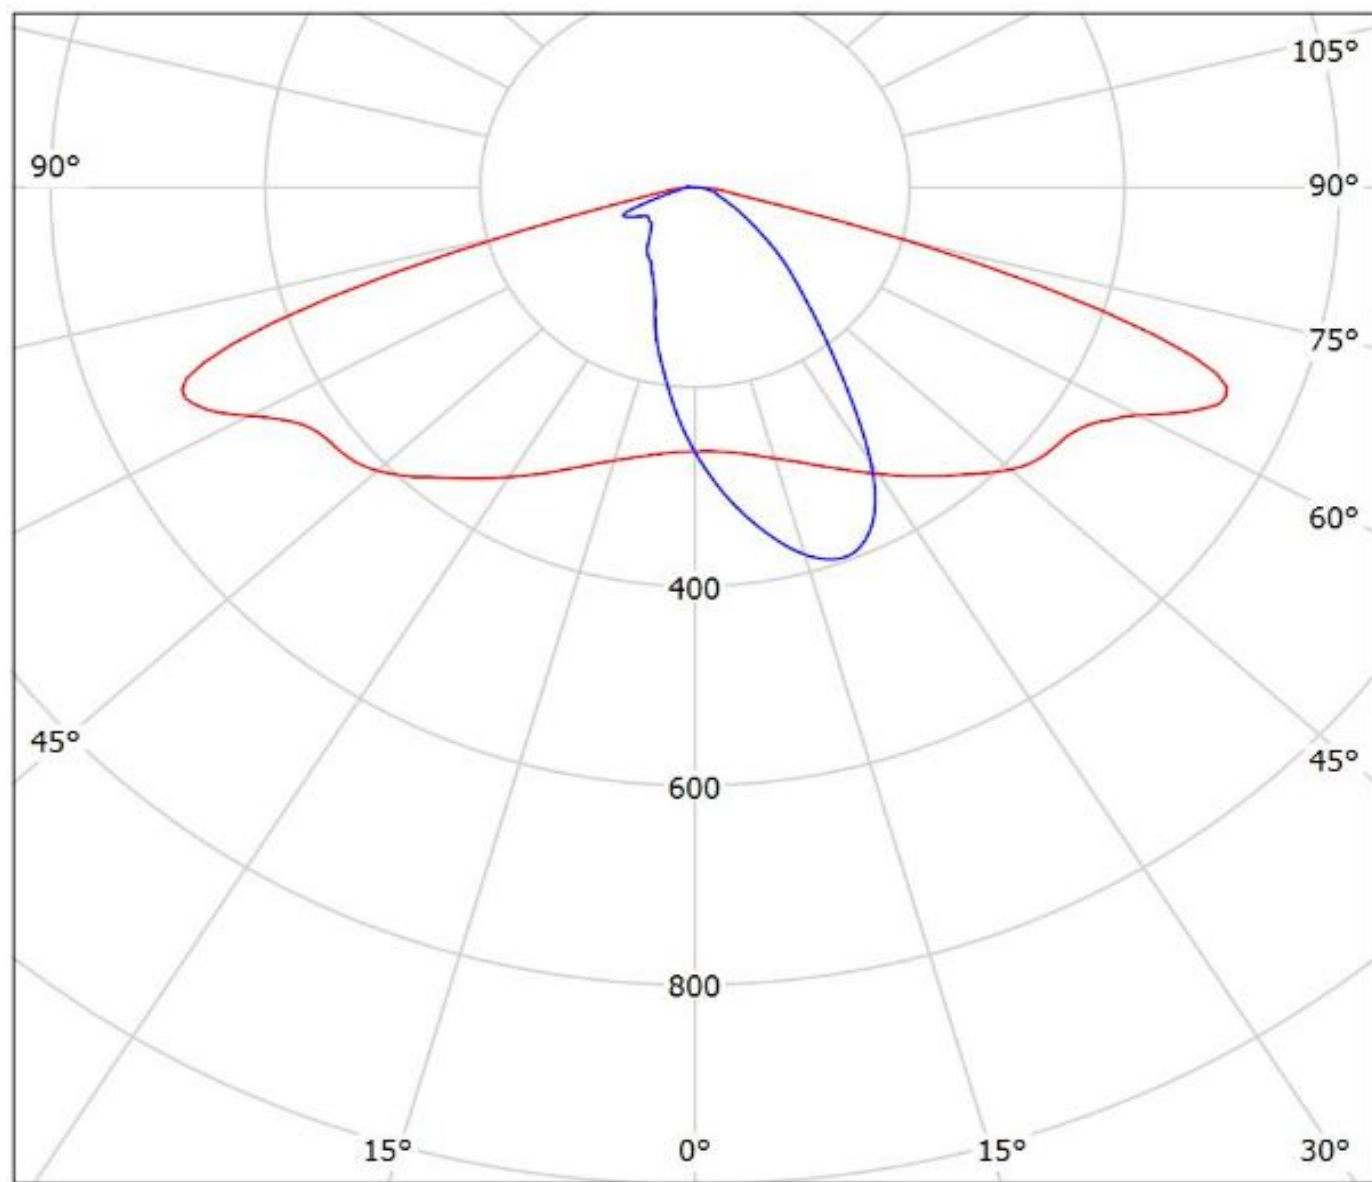


cd/klm

— C0 - C180

— C90 - C270


$\eta = 96\%$

Luminaire: Ledil Oy CS16034_STRADELLA-IP-28-T2_(LG_3528)_SIMULATED
Lamps: 1 x LG 3528

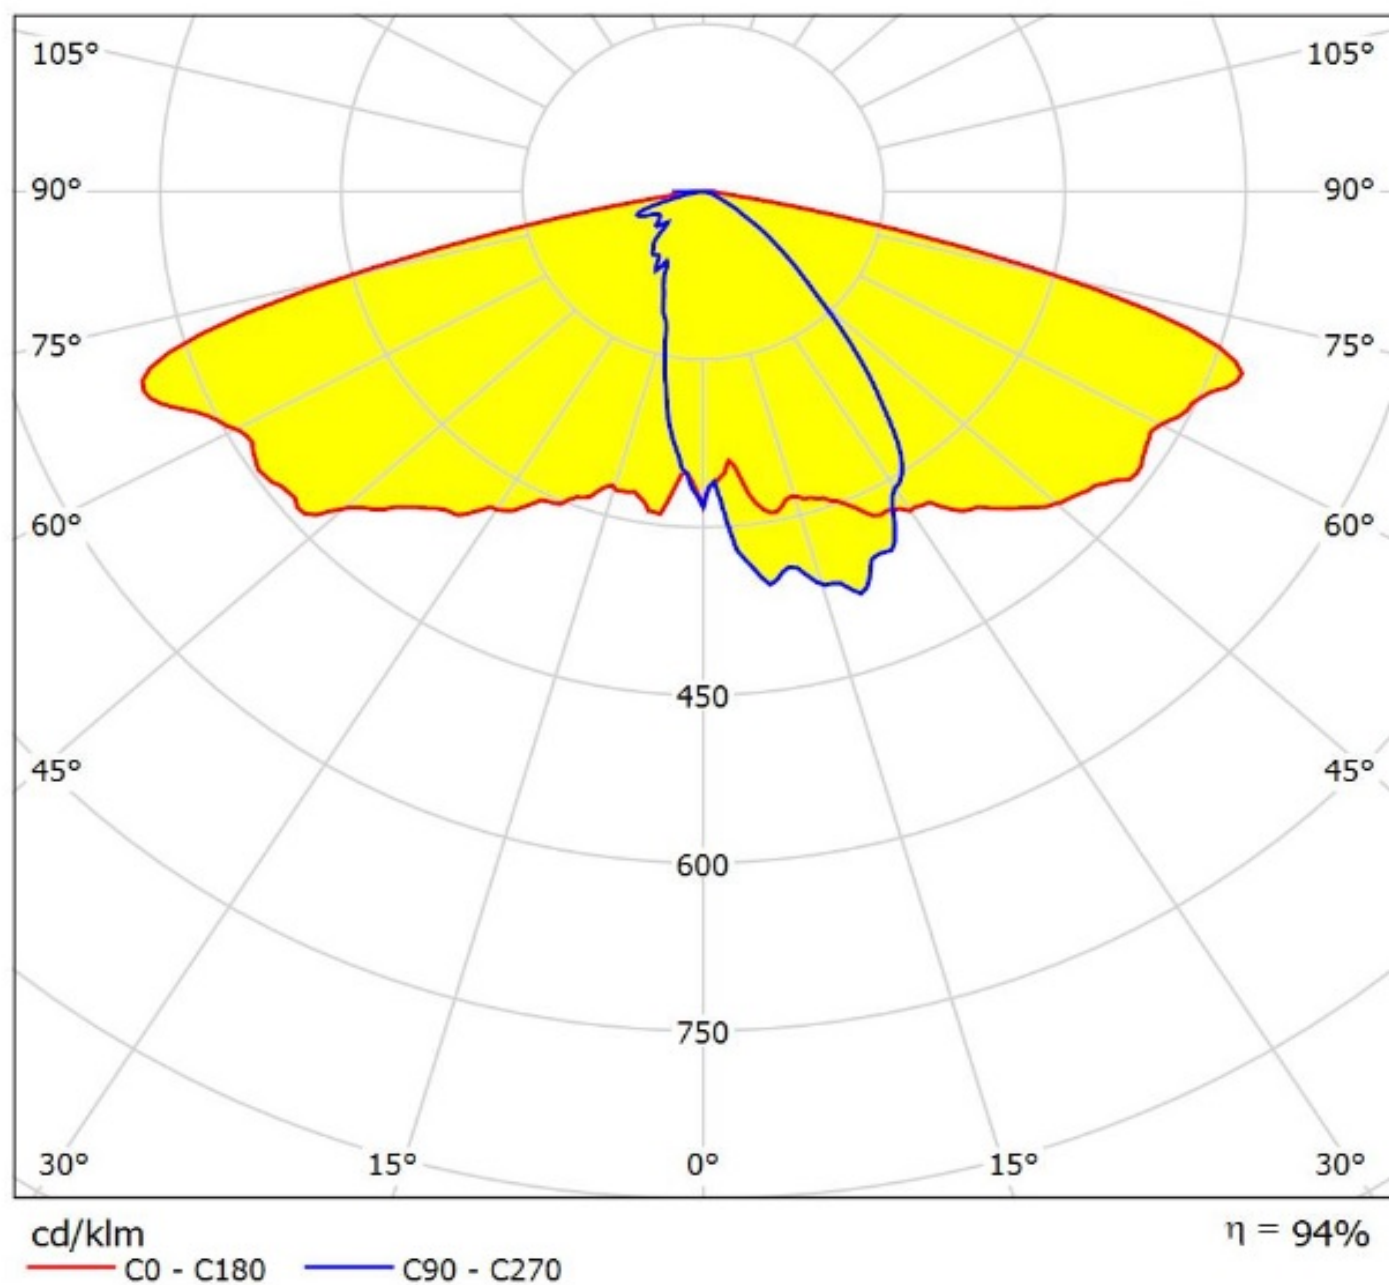


Luminaire: Ledil CS16034_STRADELLA-IP-28-T2_(Luxeon_3030_2D)

Lamps: 1 x Lumileds_Luxeon_3030_2D_1132.31lm@240mA_P=9.57624W_U=39.901V

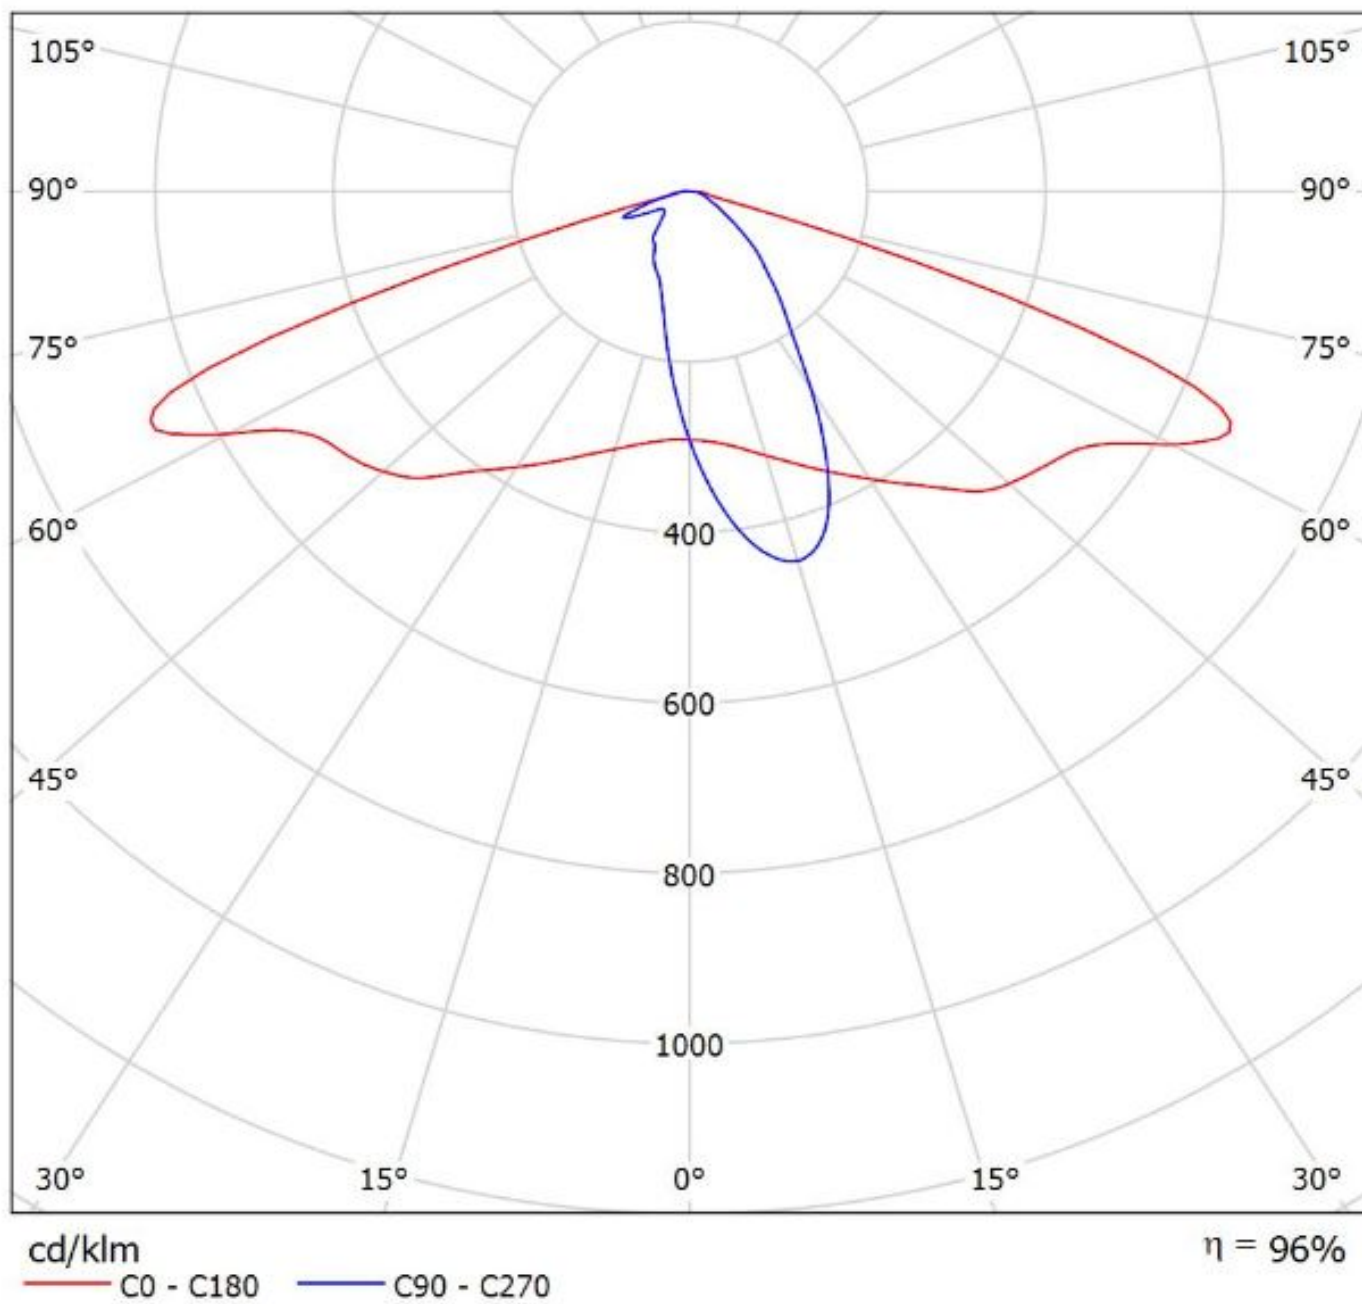


Luminaire: LEDiL Oy CS16034_STRADELLA-IP-28-T2_(NF2x757G)

Lamps: 1 x Nichia_NF2x757G_(NF2L757GRT-V1)_1005.33lm@150mA_P=5.81972W_U=38.824V

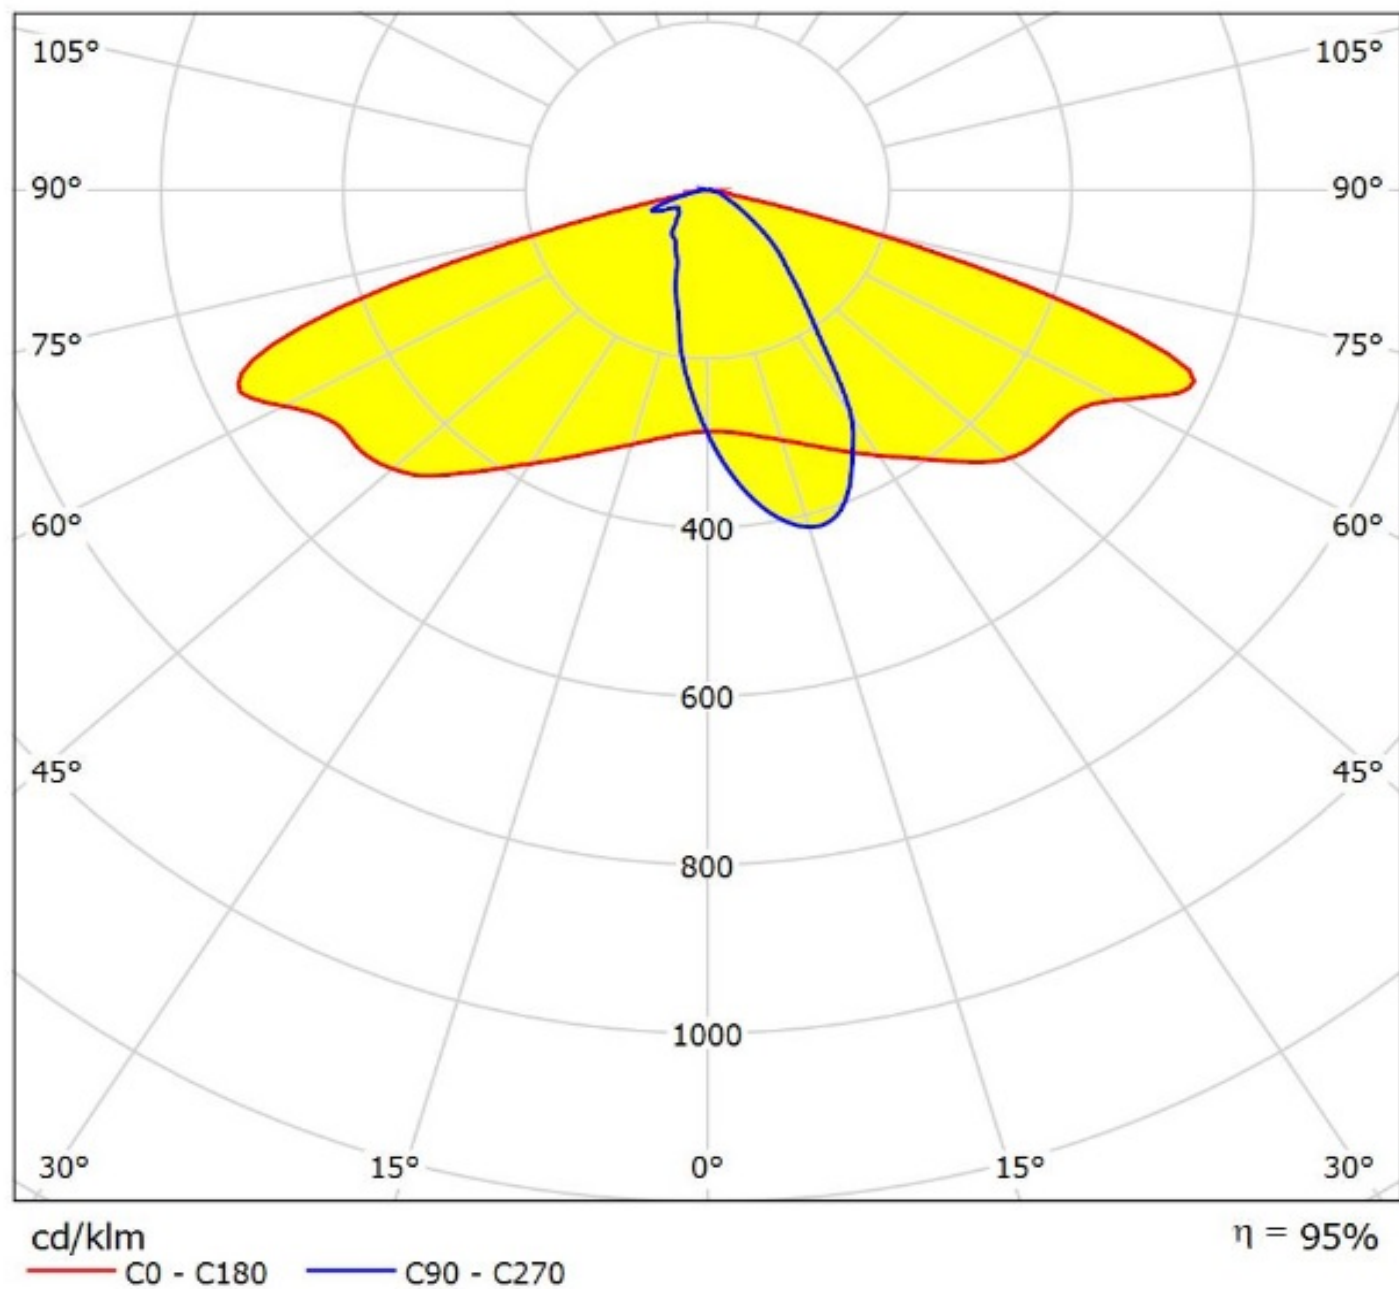


Luminaire: Ledil Oy CS16034_STRADELLA-IP-28-T2_(NVSxE21A)_SIMULATED
Lamps: 1 x Nichia NVSWE21A

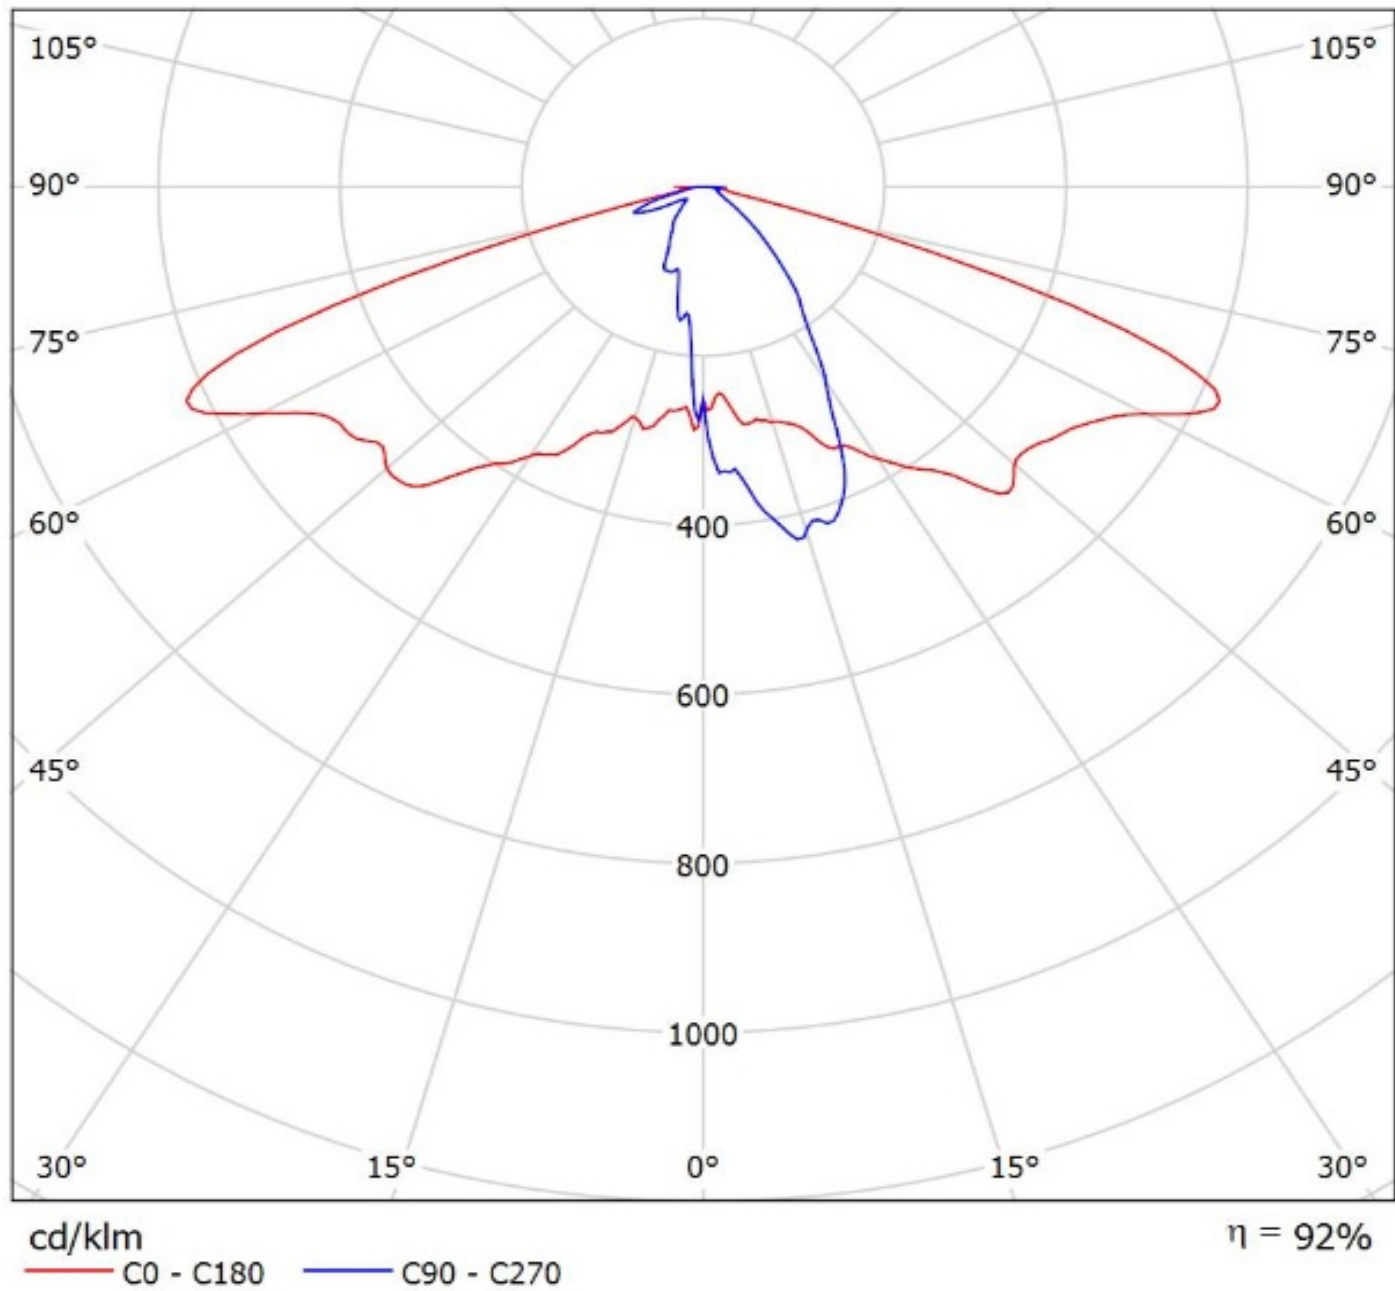

Luminaire: Ledil CS16034_STRADELLA-IP-28-T2_(Duris_S5)

Lamps: 1 x Osram_Duris_S5_Stradella28_(GW_PSLR32.EM-JQJS-A333-1)
_786.457lm@250mA_P=4.90979W_I=0.250A

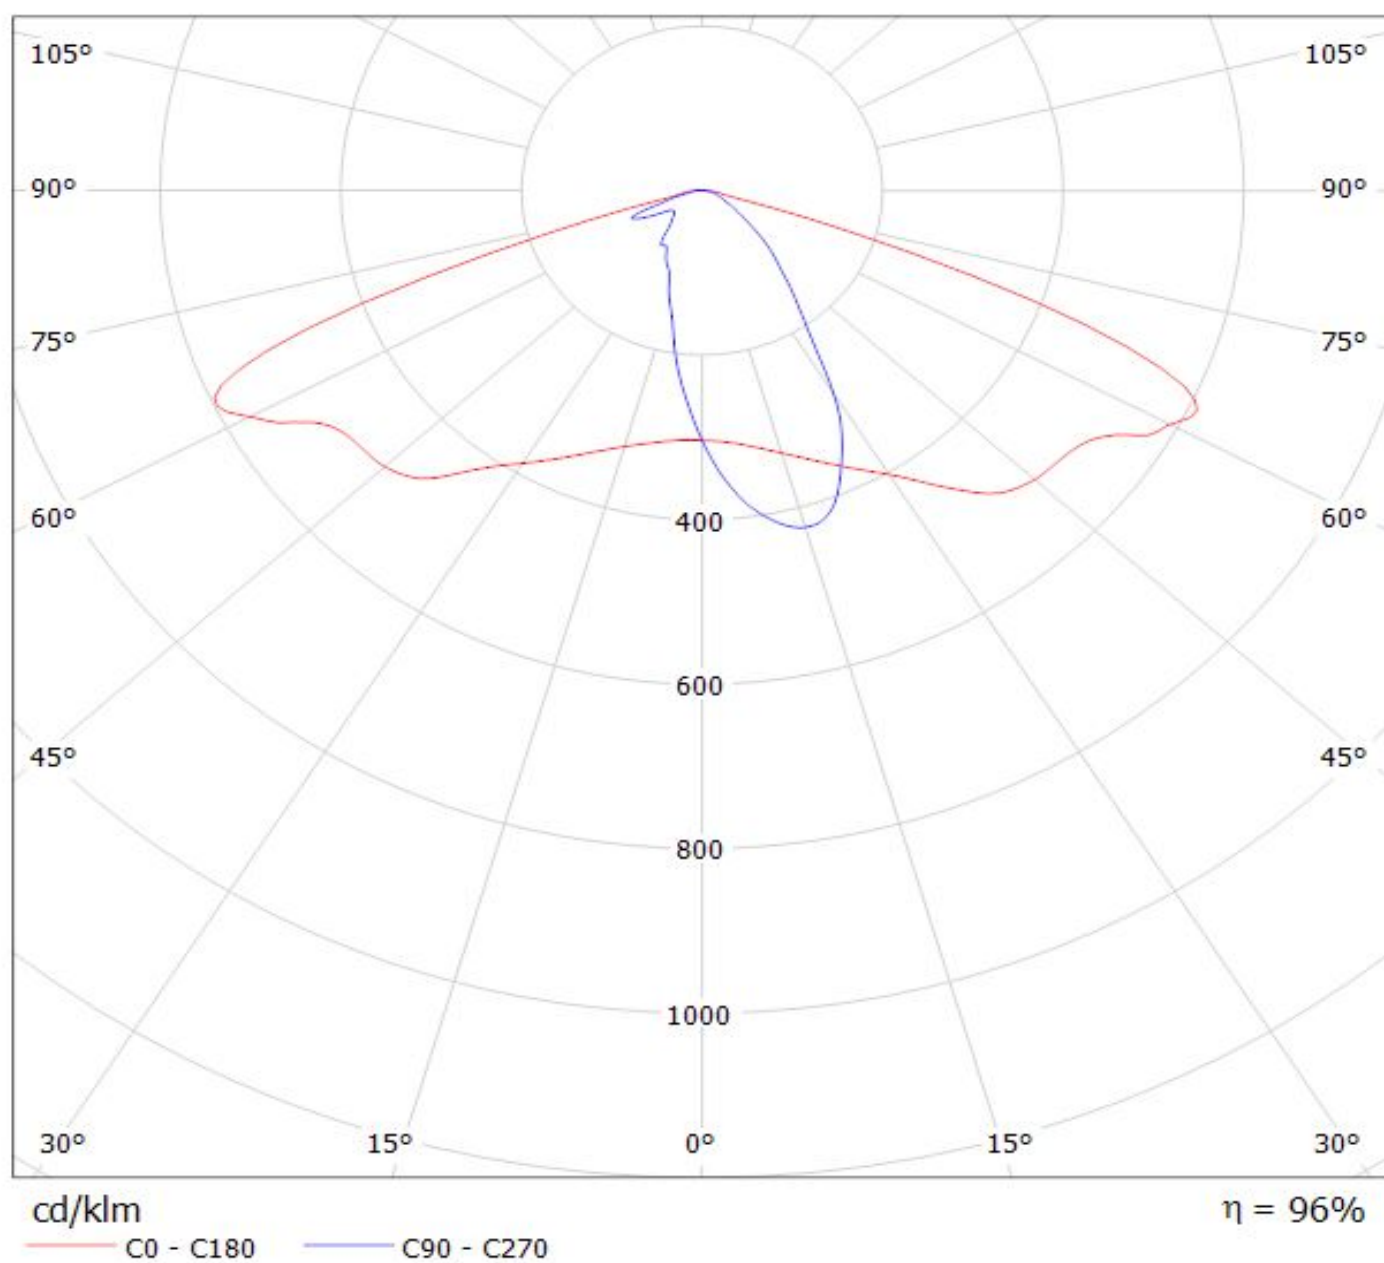

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.