

Receptacle for Photo Control

JL-260C 7P Hanging outside the way 260C



JL-260C

■ Features


- 1 UL773/ANSI C136.41-2013 standard
- 2 UL / CUL certified
- 3 Internal / External waterproof for fixture
- 4 High Lighten North pointer
- 5 360° limited orientation range to prevent wire jam
- 6 Patented Floating knob ensures twist-lock prior to orientation
- 7 waterproof cover and support suspension mounting(patent)
- 8 seven lines double insulated outdoor cable

■ Materials


- 1 UL94 V-0 rated UV resistive PC body.
PBT cover,TPE seal ring
- 2 Phosphor Bronze Power contacts
- 3 Nickel underplated phosphor bronze pads with Gold plated
- 4 16AWG 105°C or 150°C / 600V rated AWM 3321 leads for power, Supports 15A@480VAC
- 5 18AWG 105 or 150°C / 600V rated AWM 3321 leads for signal, Supports 250mA@30VDC




JL-260C

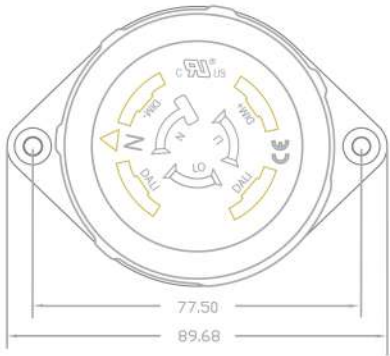

Front view

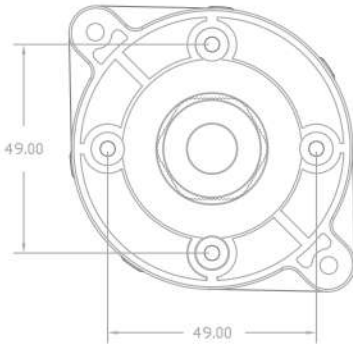

Back view

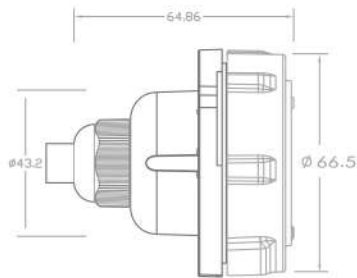


Side view

■ Notes

7P=10.10 ± 0.2mm 5P=9.60 ± 0.2mm

■ Installation diagram

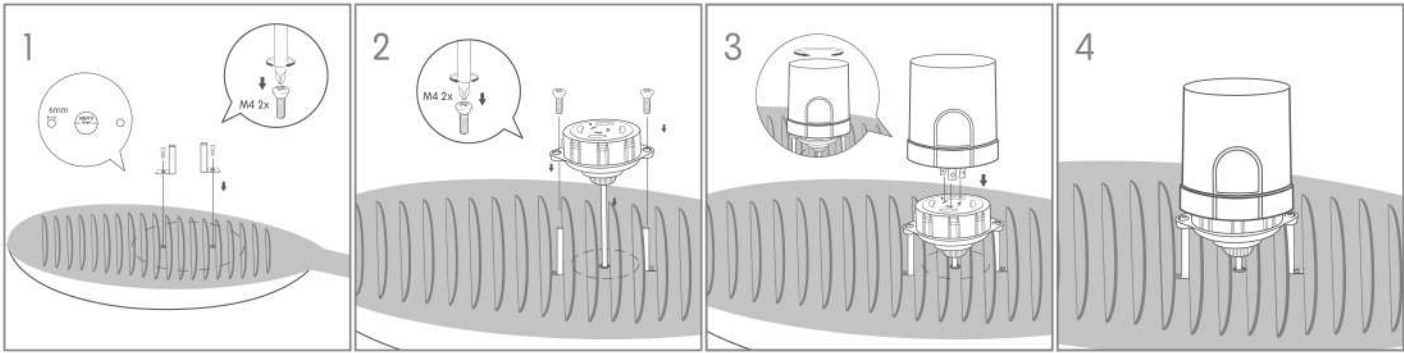

■ Wiring diagram

