



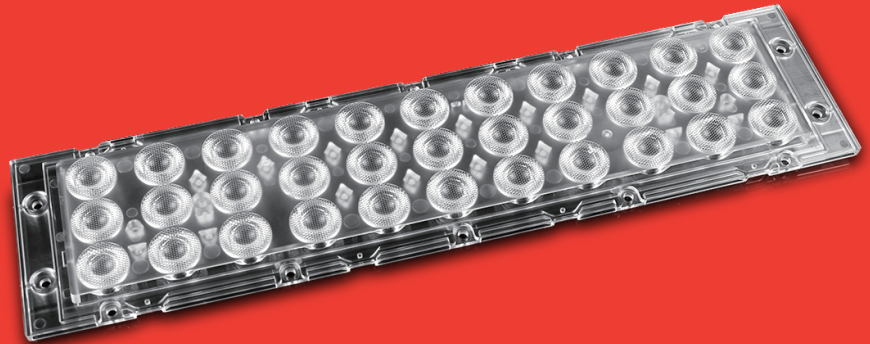

Datasheet

LL33LU-DOA××L52

Available Distribution



Dimensions


Part Number	L×W	Height
LL33LU-DOA××L52	321×79	9.07

*All dimensions are in millimeters.

LED



Packaging Details (SPQ)



Recommend Applications



General Information



Accessories




- Available with Waterproof Gasket
LL01A00RTBX2

- Lens Material PC Sabc 2180T
- Operating Temperature -40°C~+110°C
- Light Transmission Rate 400nm~900nm > 90%
- ✓ If necessary, Clean lenses with mild soap, water and soft cloth.
- ⚠ Never use any commercial cleaning solvents on lenses, like alcohol.
- ⚠ Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.

Mechanical Specification

*All dimensions are in millimeters.


Lens Dimension

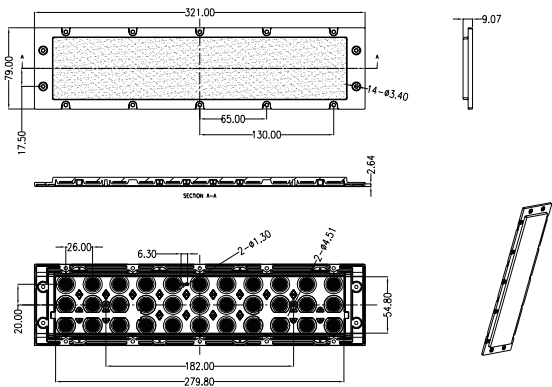

Waterproof Gasket Dimension




LL01A00RTBX2

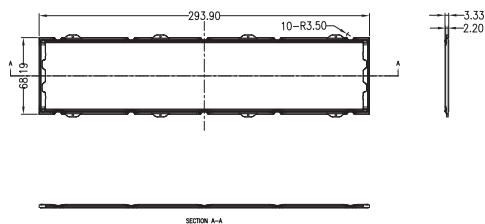


Assembly Instruction

Fixing Method

Part No LL33LU-DOA××L52
Waterproof Gasket LL01A00RTBX2

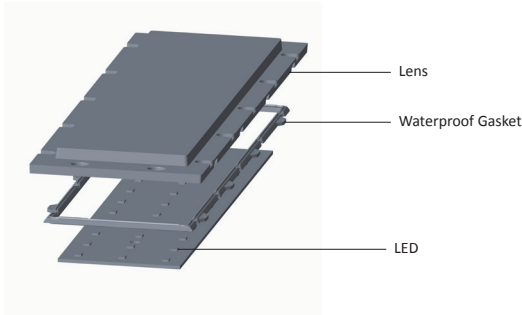

Photometric Distribution

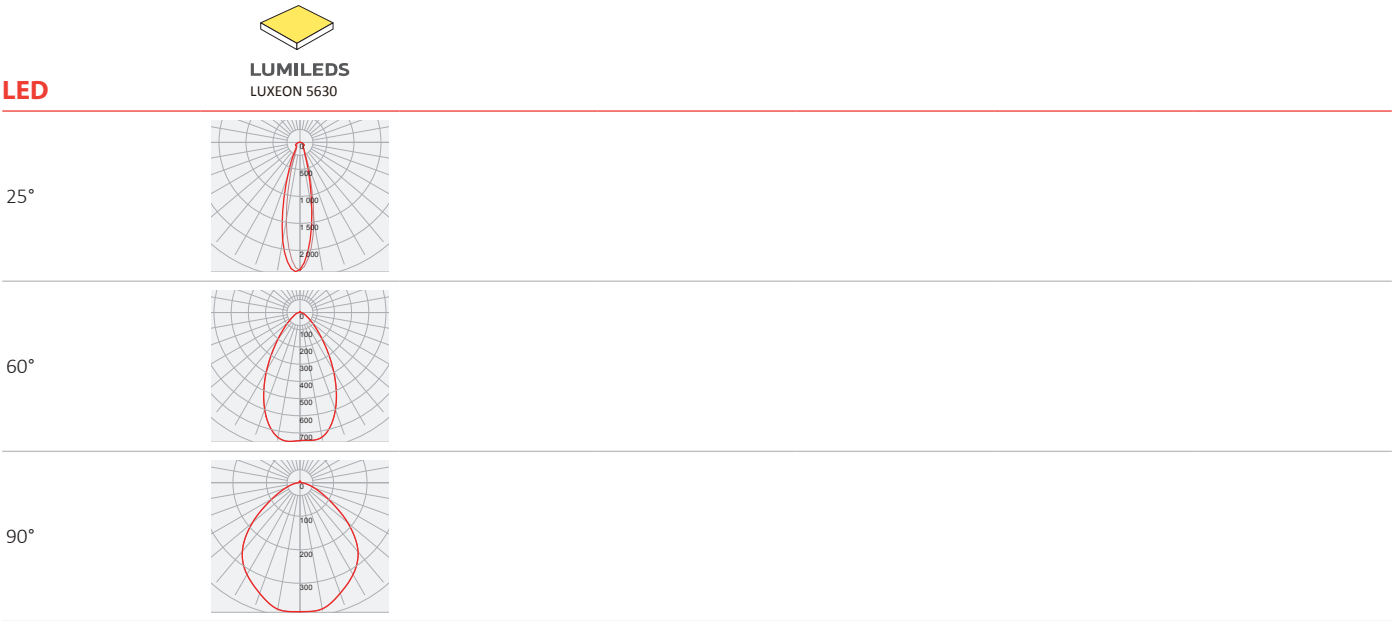

Details by LED

Part No	Waterproof Gasket	LED Package Size	LED
LL33LU-DOAxxL52	 LL01A00RTBX2	5630	 LUMILEDS LUXEON 5630

LED	Part No	FWHM	cd / lm	IES
 LUMILEDS LUXEON 5630	LL33LU-DOA25L52	25°	2.3	↓
	LL33LU-DOA60L52	61°	0.7	↓
	LL33LU-DOA90L52	98°	0.3	↓

Product Nomenclature

Ledlink Led Type Lens Angle
LL 33 LU -DOA 25 L52
Lens Dot Number Serial Number Type of Material

Ledlink Optics, Inc

Taiwan HQ

15F, No.655, Bannan Rd., Chung-Ho Dist.,
New Taipei City, Taiwan 235

Ledlink Optics (Dongguan) Co., Ltd

Dongguan Factory

No.5, TianKeng Industrial Dist., HengLi Town, DongGuan City,
GuangDong Province, China 523478

Ledlink Optics (Yangzhou) Co., Ltd

Yangzhou Factory

No.180, LinJiang Rd., YangZhou City, Jiangsu Province, China 225009

www.ledlink-optics.com

service@ledlink-optics.com

