



Advantages

- 1. All-plastic/all-metal / semi-metallic three styles are optional, which can meet the differentiated demands of anti-interference, high strength and high corrosion resistance in different scenarios;
- 2. Adopt one key press button locking method, plug and play, fast and convenient;
- 3. Precision waterproof design, with high waterproof level, no fear of wading environment;
- 4. Adopt high-strength structural materials, pressure-resistant structure design,can withstand greater vibration and shock.

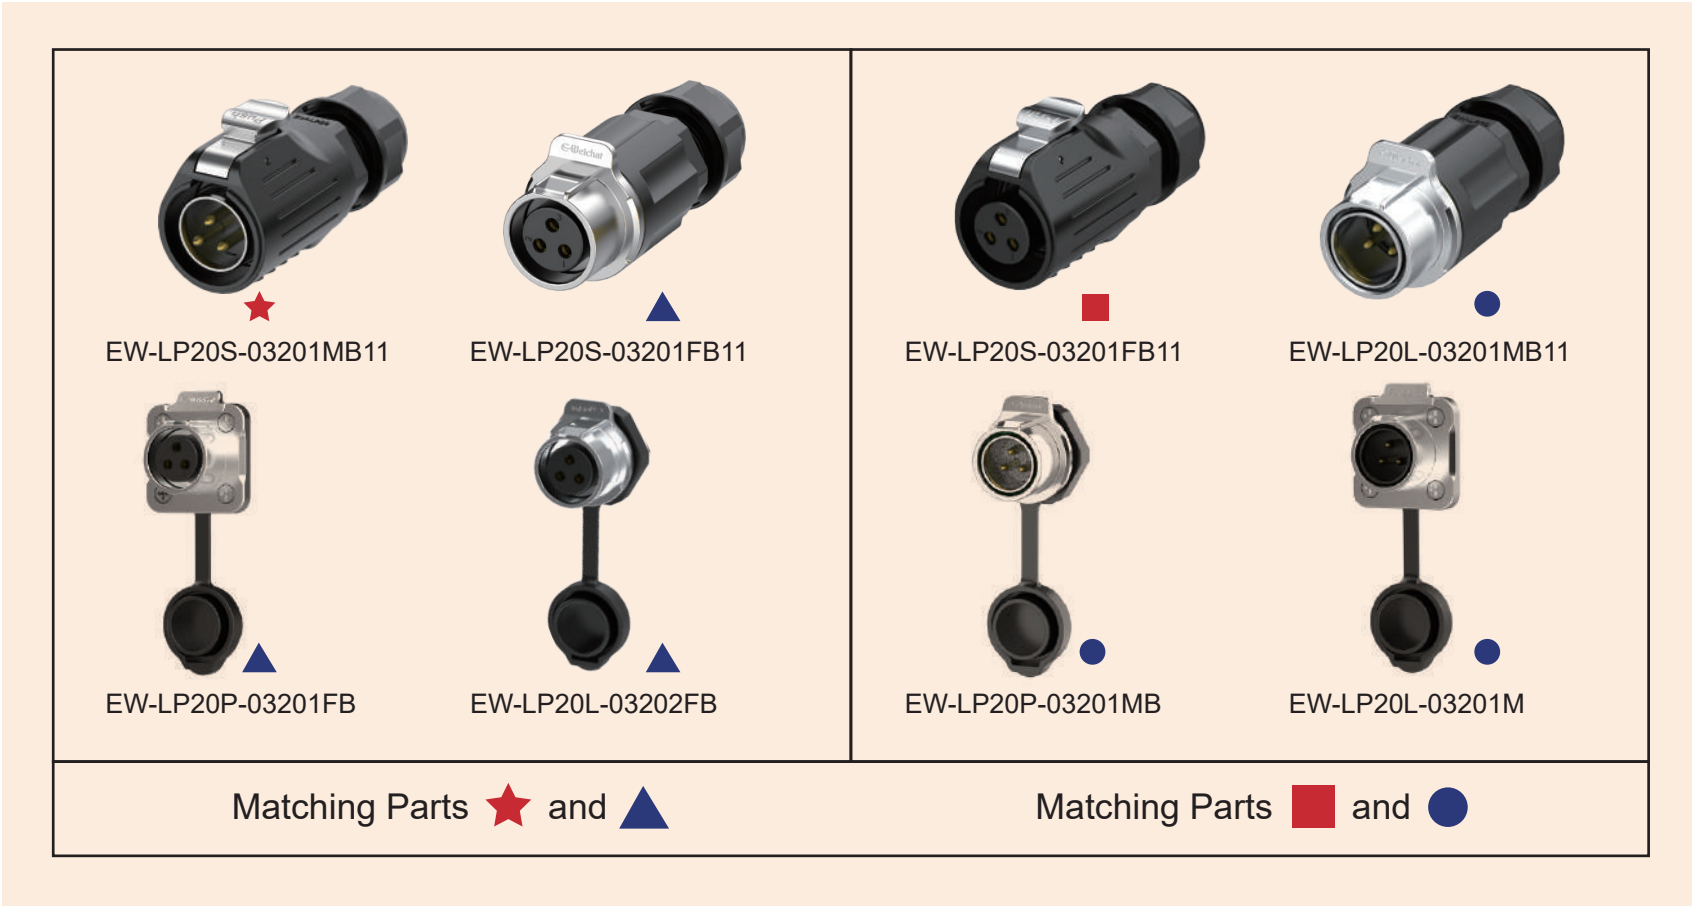

Dimension Drawing

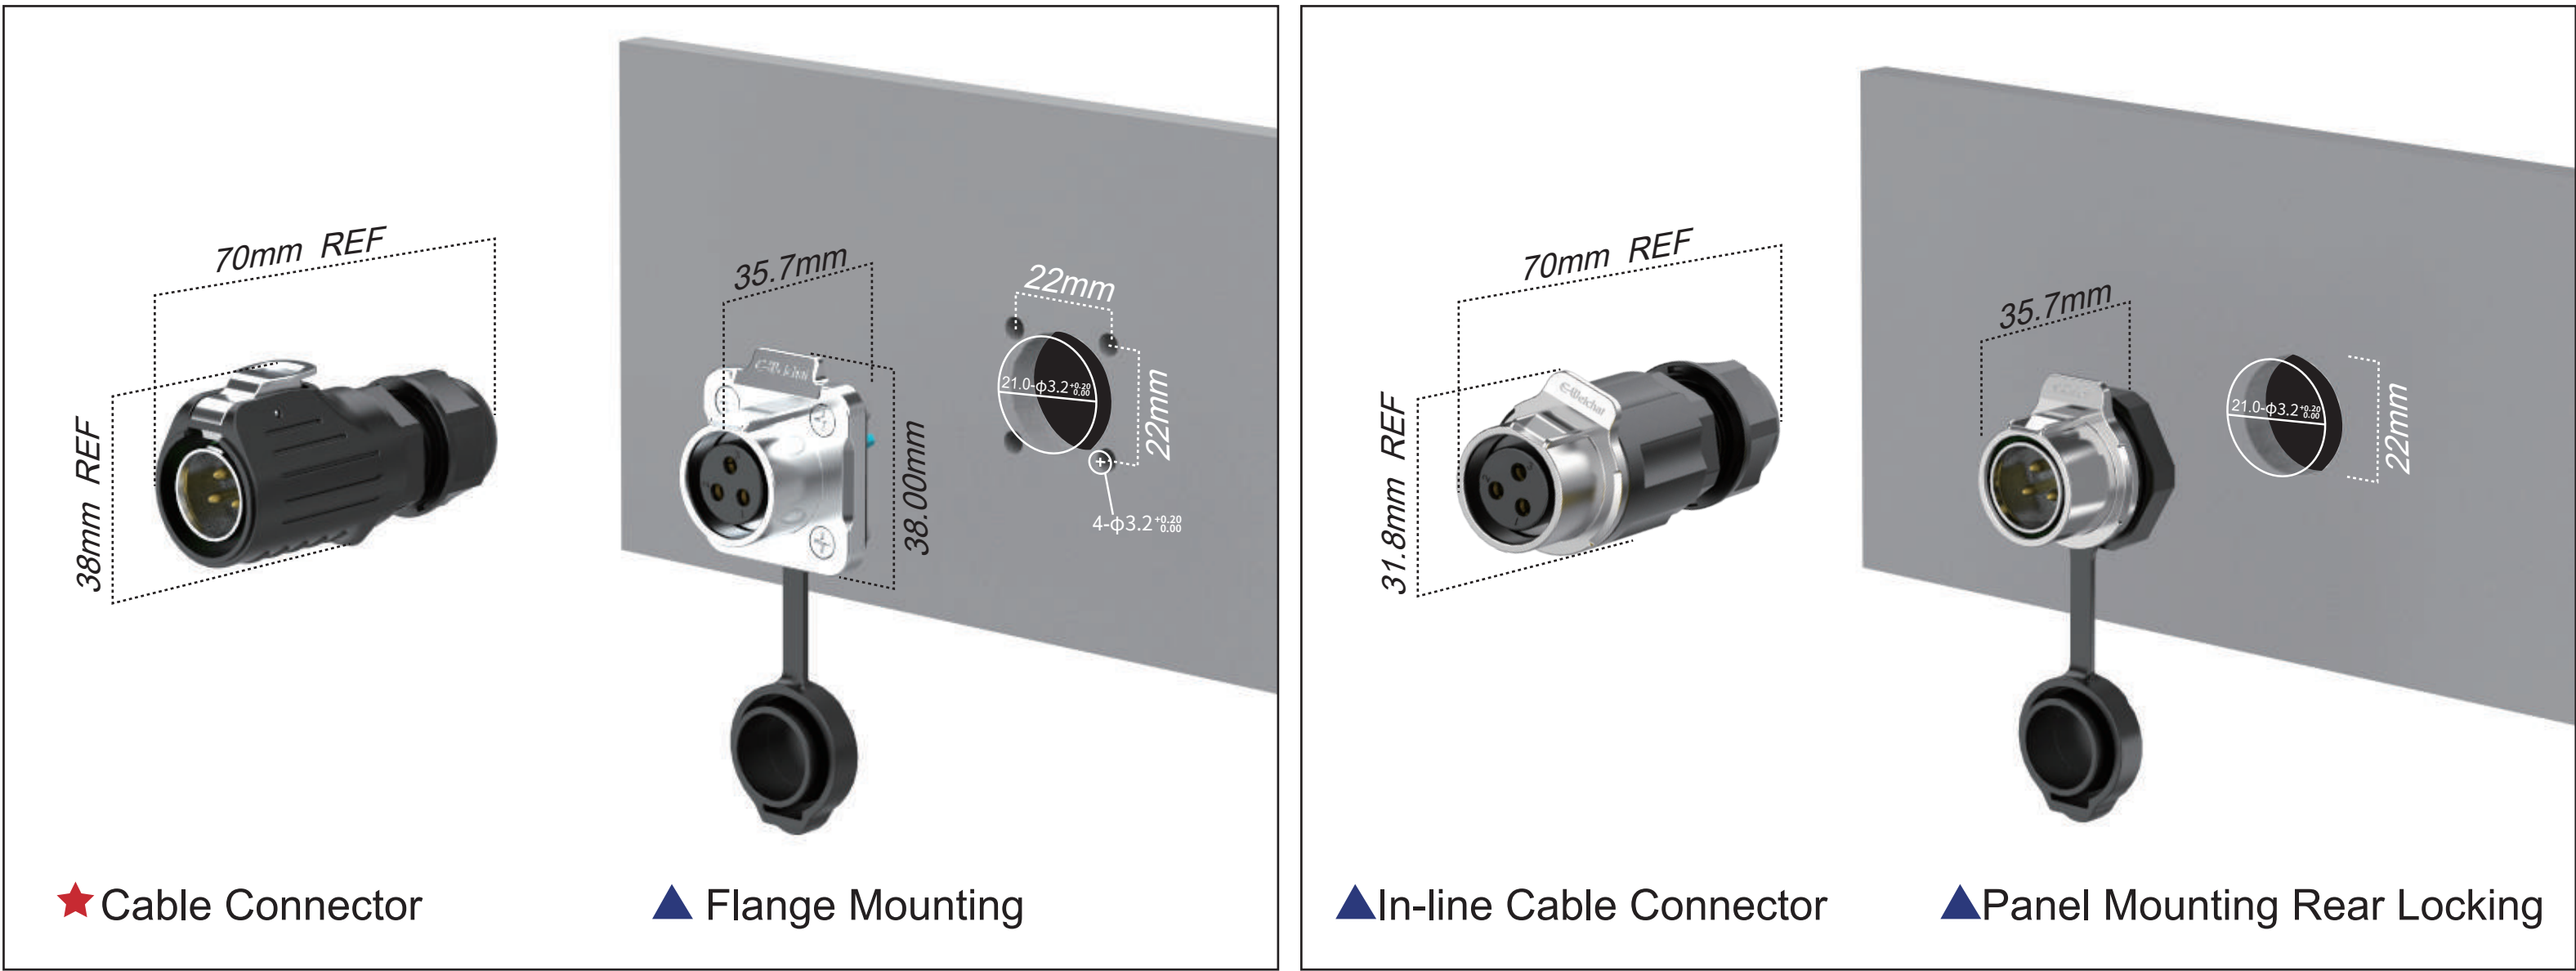

Specifications

Electrical		Mechanical		Environmental		Material	
Operating voltage	500V AC	Life cycle	≥500 times	Protection level	Standard is IP65,IP67&IP68 Option Avalitable	Shell&insulated parts	PBT
Withstand voltage	1500V AC	Wire size	1.5mm²/16AWG	Temperature rise	10A Per contact at 30K	Hardware metal	Zinc Alloy
Contact resistance	3.0mΩ	Cable O.D range	(φ9-φ12)mm	Temperature rating	-25C~+85C	Contact size	Brass with gold-plated
Insulation resistance	≥500MΩ	Assembly style	Soldering/Screw			Sealing	Silicone/ rubber
Contact diameter	Φ1.8*7						

Multiple Module Combintions

Pin Number							
Current rated	20A	20A	20A	10A	10A	5A	5A

Specific part number can scan code consult customer service to understand.