

Features

- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with NFC
- DALI-2 Certified (Part 251, 252, 253)
- 3-Timer-Modes Dimmable
- Dim-to-Off with Standby Power ≤ 0.5 W
- Integrated Power Monitoring with High Accuracy up to $\pm 1\%$
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: IUVP, IOVP, OVP, SCP, OTP
- IP66/IP67
- UL Dry/Damp/Wet Location (ET/EG models)
- SELV Output
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location (ET/EG models)
- Suitable for Luminaires with Protection Class I
- Suitable for Luminaires with Protection Class I and II (EE models)
- 5 Years Warranty



Description

The EUM-240SxxxEx series is a 240W, DALI-2, constant-current, NFC programmable and IP66/IP67 rated LED driver that operates from 90-305Vac input with excellent power factor. Created for intra-luminaire solutions and health monitoring applications, this family provides integrated AC power monitoring and dim-to-off functionality. The dimming control supports two-way communication via DALI-2. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, input under voltage, input over voltage, output over voltage, short circuit, and over temperature.

Models

Adjustable Output Current Range	Full-Power Current Range(1)	Default Output Current	Input Voltage Range(2)	Output Voltage Range	Max. Output Power	Typical Efficiency (3)	Typical Power Factor		Model Number (5)(6)
							120Vac	220Vac	
53-700mA	530-700mA	530 mA	90~305 Vac/ 127~300 Vdc	171~453Vdc	240 W	94.5%	0.99	0.96	EUM-240S070Ex
70-1050mA	700-1050mA	700 mA	90~305 Vac/ 127~300 Vdc	115~343Vdc	240 W	94.0%	0.99	0.96	EUM-240S105Ex
105-1500mA	1050-1500mA	1050 mA	90~305 Vac/ 127~300 Vdc	80~229 Vdc	240 W	93.5%	0.99	0.96	EUM-240S150Ex
215-3500mA	2150-3500mA	2150 mA	90~305 Vac/ 127~300 Vdc	35~111 Vdc	240 W	94.0%	0.99	0.96	EUM-240S350Ex ⁽⁴⁾
420-6700mA	4200-6700mA	4900 mA	90~305 Vac/ 127~300 Vdc	18~57 Vdc	240 W	93.0%	0.99	0.96	EUM-240S670Ex ⁽⁴⁾

Notes: (1) Output current range with constant power at 240W.

(2) Certified input voltage range: UL, FCC 100-277Vac; otherwise 100-240Vac.






(3) Measured at 100%load and 220Vac input (see below "General Specifications" for details).

(4) SELV output.

(5) All the models are certificated to KS, except EUM-240S070Ex and EUM-240S105Ex.

(6) x = G are UL Recognized, ENEC and CCC, etc. models; x = T are UL Class P models; x = E are Class II models with ENEC, etc. See below "Mechanical Outline" for details.

I-V Operation Area

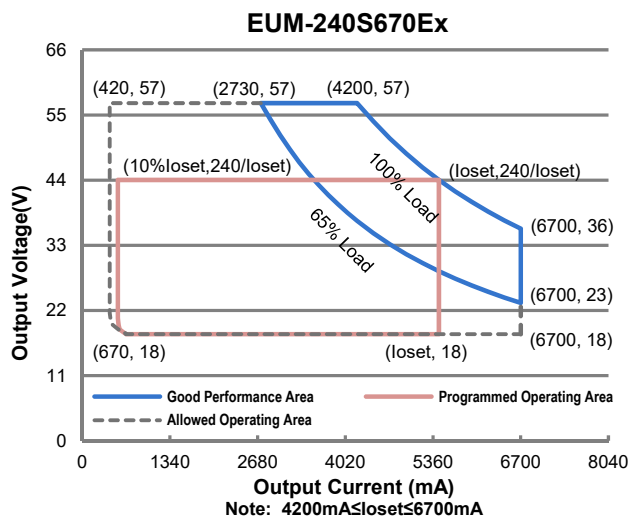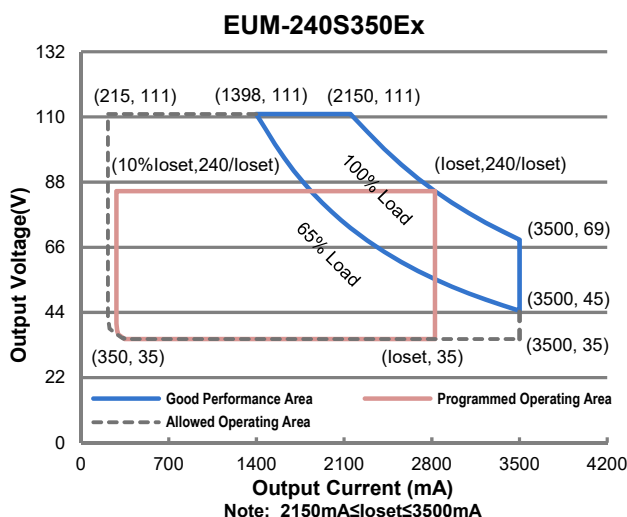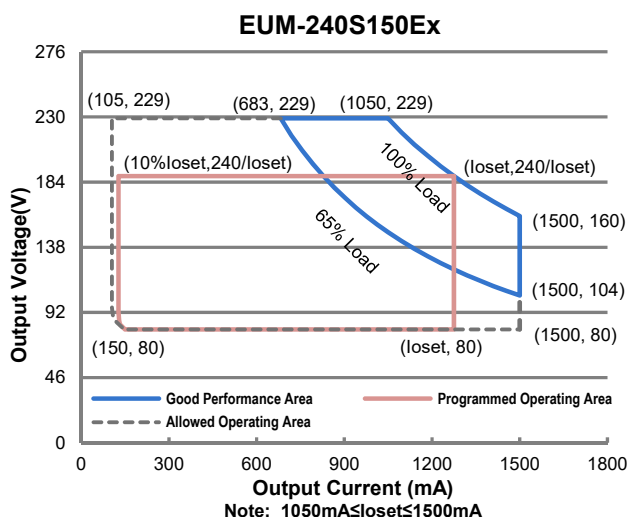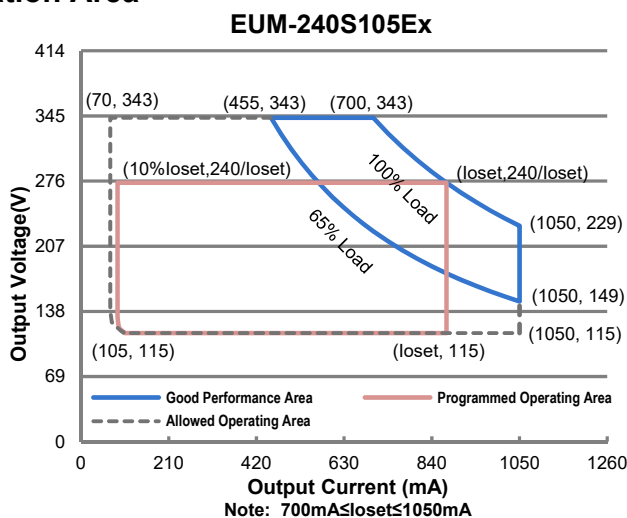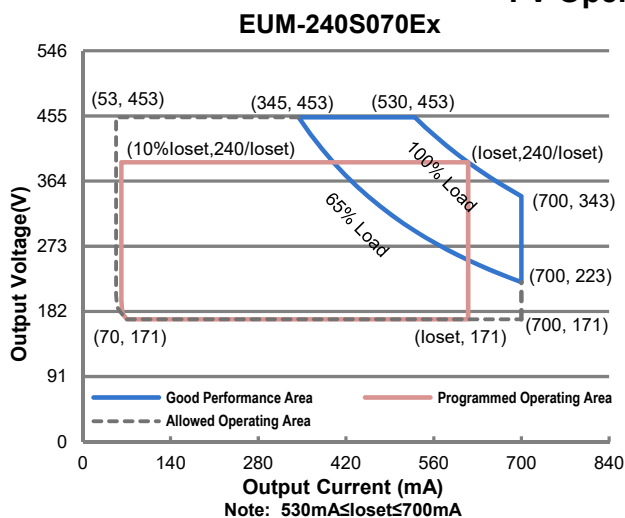

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input AC Voltage	90 Vac	-	305 Vac	
Input DC Voltage	127 Vdc	-	300 Vdc	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.75 MU	UL 8750; 277Vac/60Hz
	-	-	0.70 mA	IEC 60598-1; 240Vac/60Hz
Input AC Current	-	-	2.61 A	Measured at 100%load and 120 Vac input.
	-	-	1.39 A	Measured at 100%load and 220 Vac input.
Inrush Current(I _{2t})	-	-	5.69 A ² s	At 220Vac input, 25°C cold start, duration=1.20ms, 10%I _{pk} -10%I _{pk} . See Inrush Current Waveform for the details.
PF	0.9	-	-	At 100-277Vac, 50-60Hz, 65%-100% Load (156-240W)
THD	-	-	20%	
THD	-	-	10%	At 220-240Vac, 50-60Hz, 75%-100% Load (180-240W)

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%loset	-	5%loset	At 100%load condition
Output Current Setting(loset) Range				
EUM-240S070Ex	53 mA	-	700 mA	
EUM-240S105Ex	70 mA	-	1050 mA	
EUM-240S150Ex	105 mA	-	1500 mA	
EUM-240S350Ex	215 mA	-	3500 mA	
EUM-240S670Ex	420 mA	-	6700 mA	
Output Current Setting Range with Constant Power				
EUM-240S070Ex	530 mA	-	700 mA	
EUM-240S105Ex	700 mA	-	1050 mA	
EUM-240S150Ex	1050 mA	-	1500 mA	
EUM-240S350Ex	2150 mA	-	3500 mA	
EUM-240S670Ex	4200 mA	-	6700 mA	
Total Output Current Ripple (pk-pk)	-	5%lomax	10%lomax	At 100%load condition. 20 MHz BW
Output Current Ripple at < 200 Hz (pk-pk)	-	2%lomax	-	At 100%load condition. Only this component of ripple is associated with visible flicker.
Startup Overshoot Current	-	-	10%lomax	At 100%load condition
No Load Output Voltage				
EUM-240S070Ex	-	-	500 V	
EUM-240S105Ex	-	-	400 V	
EUM-240S150Ex	-	-	300 V	
EUM-240S350Ex	-	-	120 V	
EUM-240S670Ex	-	-	75 V	

Output Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Line Regulation	-	-	±0.5%	Measured at 100%load
Load Regulation	-	-	±3.0%	
Turn-on Delay Time	-	-	0.5 s	Measured at all dimming modes except DALI-2, and 120-277Vac input, 65%-100% Load
	-	-	1.0 s	Measured at DALI-2 dimming mode, and 120-277Vac input, 65%-100% Load
Temperature Coefficient of iset	-	0.03%/°C	-	Case temperature = 0°C~Tc max

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 120 Vac input: EUM-240S070Ex				Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Io= 530 mA	90.0%	92.0%	-	
Io= 700 mA	90.0%	92.0%	-	
EUM-240S105Ex				
Io= 700 mA	89.5%	91.5%	-	
Io=1050 mA	89.5%	91.5%	-	
EUM-240S150Ex				
Io=1050 mA	88.5%	90.5%	-	
Io=1500 mA	88.5%	90.5%	-	
EUM-240S350Ex				
Io=2150 mA	90.0%	92.0%	-	
Io=3500 mA	89.0%	91.0%	-	
EUM-240S670Ex				
Io=4200 mA	88.5%	90.5%	-	
Io=6700 mA	87.0%	89.0%	-	
Efficiency at 220 Vac input: EUM-240S070Ex				Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Io= 530 mA	92.5%	94.5%	-	
Io= 700 mA	92.5%	94.5%	-	
EUM-240S105Ex				
Io= 700 mA	92.0%	94.0%	-	
Io=1050 mA	92.0%	94.0%	-	
EUM-240S150Ex				
Io=1050 mA	91.5%	93.5%	-	
Io=1500 mA	91.5%	93.5%	-	
EUM-240S350Ex				
Io=2150 mA	92.0%	94.0%	-	
Io=3500 mA	91.0%	93.0%	-	
EUM-240S670Ex				
Io=4200 mA	91.0%	93.0%	-	
Io=6700 mA	90.0%	92.0%	-	

General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 277 Vac input: EUM-240S070Ex I _o = 530 mA I _o = 700 mA EUM-240S105Ex I _o = 700 mA I _o =1050 mA EUM-240S150Ex I _o =1050 mA I _o =1500 mA EUM-240S350Ex I _o =2150 mA I _o =3500 mA EUM-240S670Ex I _o =4200 mA I _o =6700 mA	93.0% 93.0% 92.5% 92.5% 92.0% 92.0% 92.5% 91.5% 91.5% 90.0%	95.0% 95.0% 94.5% 94.5% 94.0% 94.0% 94.5% 93.5% 93.5% 92.0%	- - - - - - - - - -	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Power Monitoring Accuracy	-1%	-	1%	Measured at 220Vac input and 100%Load
Standby Power	-	-	0.5 W	Measured at 230Vac/50Hz; Dimming off
MTBF	-	222,000 Hours	-	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)
Lifetime	-	120,000 Hours	-	Measured at 220Vac input, 80%Load and 70°C case temperature; See lifetime vs. T _c curve for the details
Operating Case Temperature for Safety T _{c_s}	-40°C	-	+90°C	
Operating Case Temperature for Warranty T _{c_w}	-40°C	-	+80°C	Case temperature for 5 years warranty Humidity: 10% RH to 95% RH
Storage Temperature	-40°C	-	+85°C	Humidity: 5% RH to 95% RH
Dimensions Inches (L × W × H) Millimeters (L × W × H)	7.91 × 2.66 × 1.52 201 × 67.5 × 38.5			With mounting ear 8.58 × 2.66 × 1.52 218 × 67.5 × 38.5
Net Weight	-	1120 g	-	

Dimming Specifications

Parameter	Min.	Typ.	Max.	Notes
DA, DA High Level	9.5 V	16 V	22.5 V	
DA, DA Low Level	-6.5 V	0 V	6.5 V	
DA, DA Current	0 mA	-	2 mA	

Dimming Specifications (Continued)

Parameter		Min.	Typ.	Max.	Notes
Dimming Output Range	EUM-240S070Ex EUM-240S105Ex EUM-240S150Ex EUM-240S350Ex EUM-240S670Ex	10%loset	-	loset	530 mA ≤ loiset ≤ 700mA 700 mA ≤ loiset ≤ 1050 mA 1050 mA ≤ loiset ≤ 1500 mA 2150 mA ≤ loiset ≤ 3500 mA 4200 mA ≤ loiset ≤ 6700 mA
	EUM-240S070Ex EUM-240S105Ex EUM-240S150Ex EUM-240S350Ex EUM-240S670Ex	53 mA 70 mA 105 mA 215 mA 420 mA	-	loiset	53 mA ≤ loiset ≤ 530 mA 70 mA ≤ loiset < 700 mA 105 mA ≤ loiset < 1050 mA 215 mA ≤ loiset < 2150 mA 420 mA ≤ loiset < 4200 mA

Safety & EMC Compliance

Safety Category	Standard
UL/CUL	UL 8750, CAN/CSA-C22.2 No. 250.13
ENEC	EN 61347-1 ⁽¹⁾ , EN 61347-2-13
UKCA	BS EN 61347-1 ⁽¹⁾ , BS EN 61347-2-13 BS EN 301 489-1 BS EN 301 489-3 BS EN 300 330 BS EN 62479/BS EN 50663/BS EN 50665/BS EN 50364
CE	EN 61347-1 ⁽¹⁾ , EN 61347-2-13 EN 301 489-1 EN 301 489-3 EN 300 330 EN 62479/EN 50663/EN 50665/EN 50364
CB	IEC 61347-1 ⁽¹⁾ , IEC 61347-2-13
CCC	GB 19510.1, GB 19510.14
KS	KS C 7655
Performance	Standard
ENEC	EN 62384
EMI Standards	Notes
BS EN/EN IEC 55015/GB/T 17743 ⁽²⁾	Conducted emission Test & Radiated emission Test
BS EN/EN IEC 61000-3-2/GB 17625.1	Harmonic current emissions
BS EN/EN 61000-3-3	Voltage fluctuations & flicker
FCC Part 15 ⁽²⁾	ANSI C63.4 Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired operation.

Safety & EMC Compliance (Continued)


EMS Standards	Notes
BS EN/EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
BS EN/EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
BS EN/EN 61000-4-4	Electrical Fast Transient / Burst-EFT
BS EN/EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 6 kV, Common Mode 10 kV
BS EN/EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
BS EN/EN 61000-4-8	Power Frequency Magnetic Field Test
BS EN/EN 61000-4-11	Voltage Dips
BS EN/EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment
DALI-2 Standards	Notes
DALI-2 ⁽³⁾	IEC 62386-101, -102 & -207

Notes: (1) EE models meet the requirements for EN/BS EN/IEC 61347-1(Class II), when the driver is energized, the allowed leakage current is perceptible but harmless.


(2) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.

(3) DALI Parts: 101, 102, 207, 251, 252, 253.


Derating

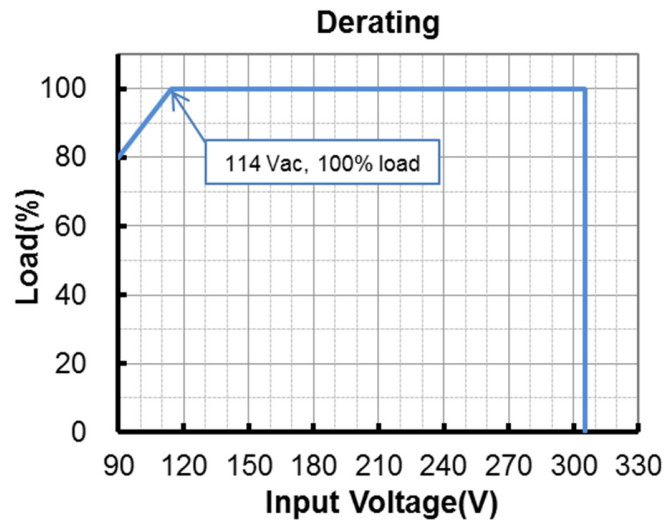



Lifetime vs. Case Temperature

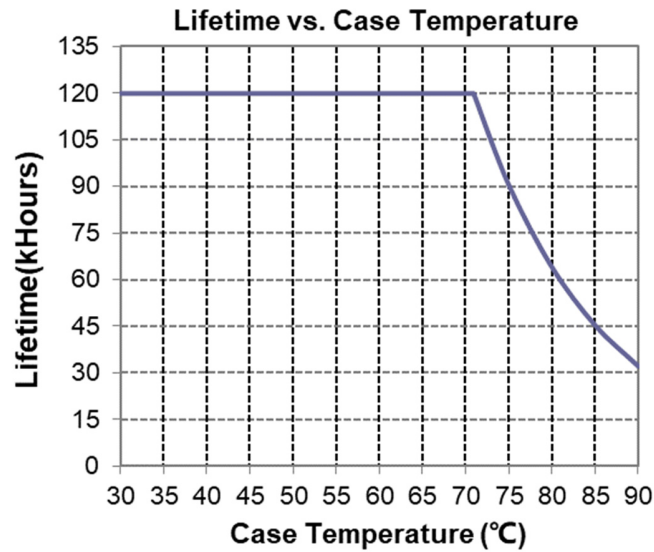


Inrush Current Waveform

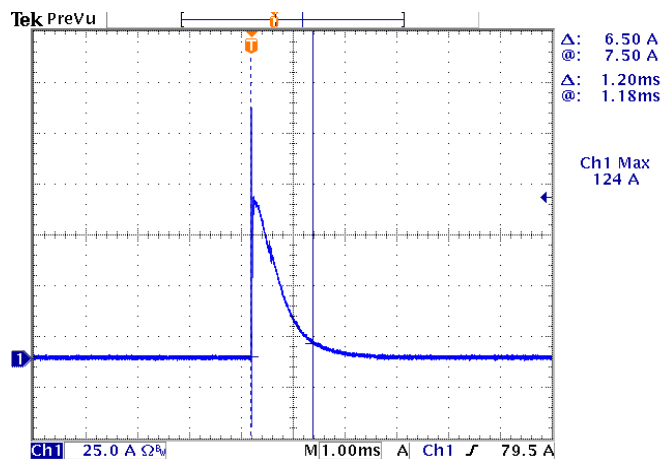


Efficiency vs. Load

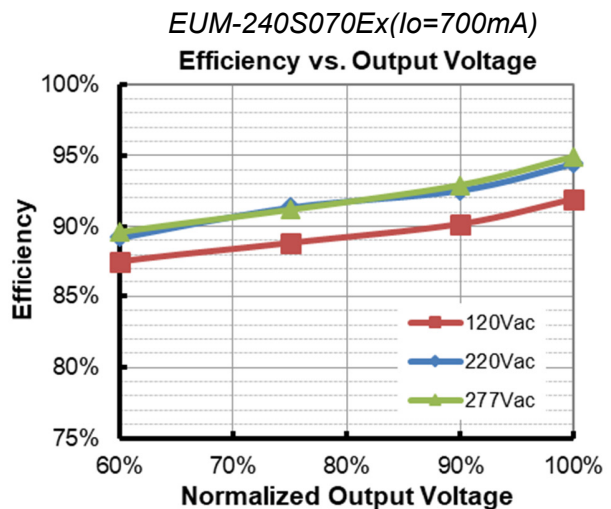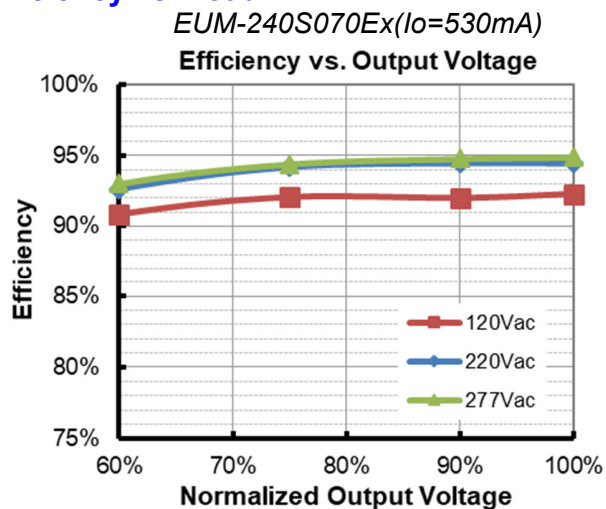


EUM-240S105Ex($I_o=700mA$)
Efficiency vs. Output Voltage

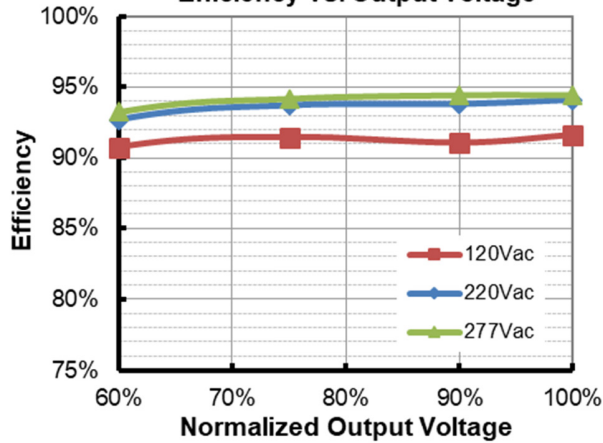


EUM-240S105Ex($I_o=1050mA$)
Efficiency vs. Output Voltage

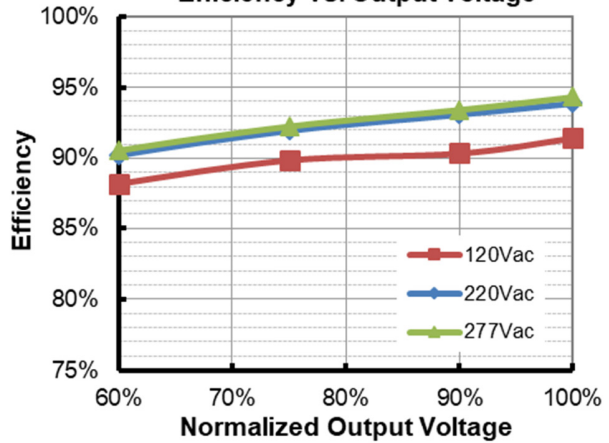


EUM-240S150Ex($I_o=1050mA$)
Efficiency vs. Output Voltage

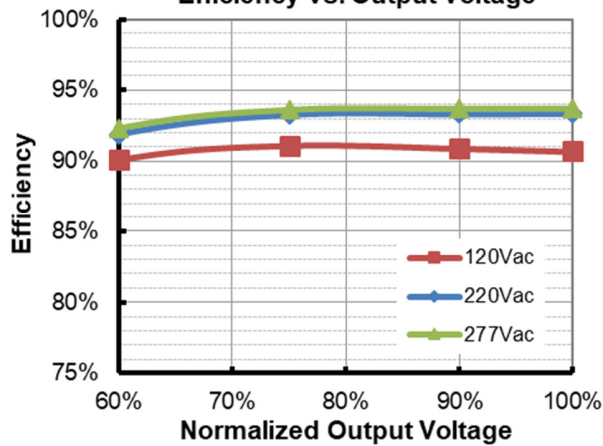


EUM-240S150Ex($I_o=1500mA$)
Efficiency vs. Output Voltage


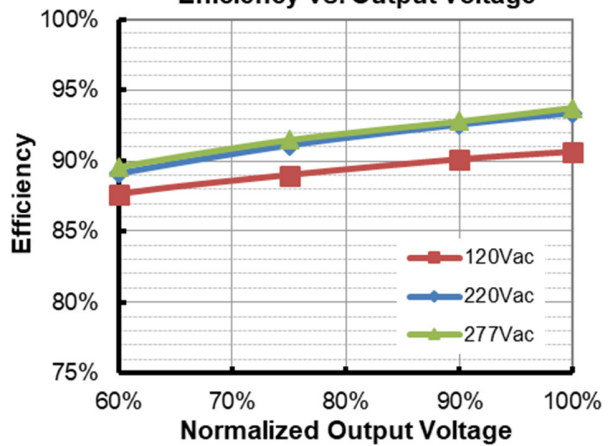


EUM-240S350Ex($I_o=2150mA$)
Efficiency vs. Output Voltage

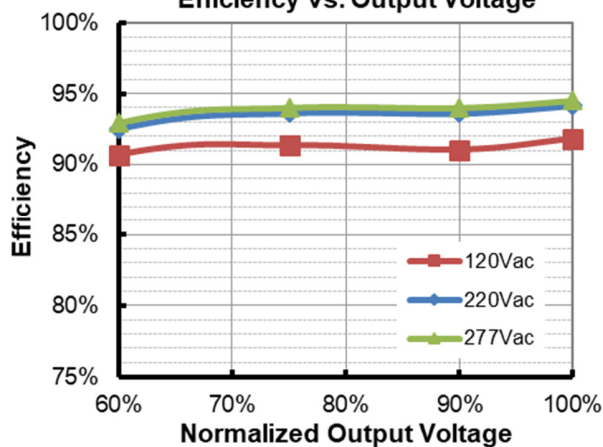


EUM-240S210Ex($I_o=3500mA$)
Efficiency vs. Output Voltage

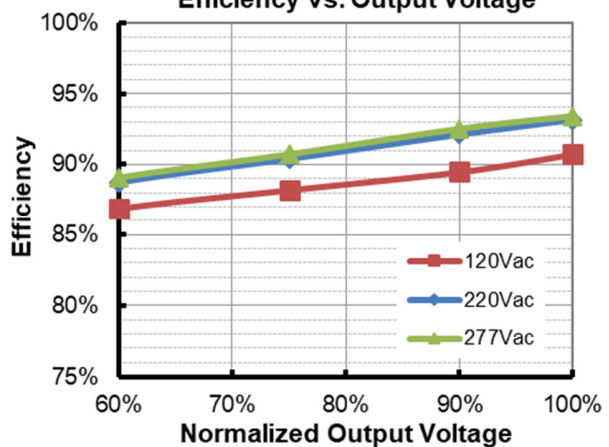


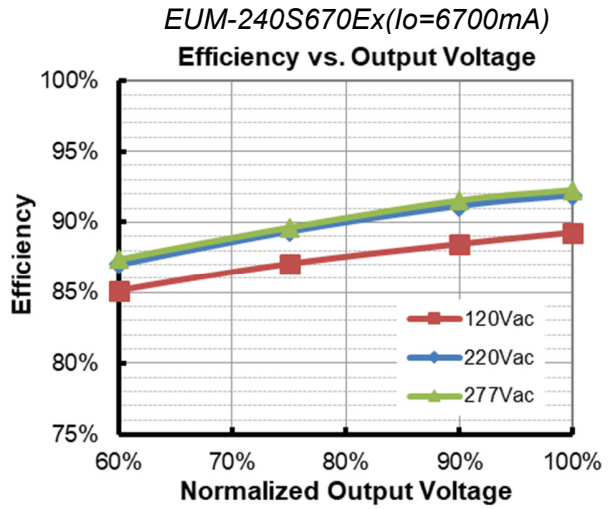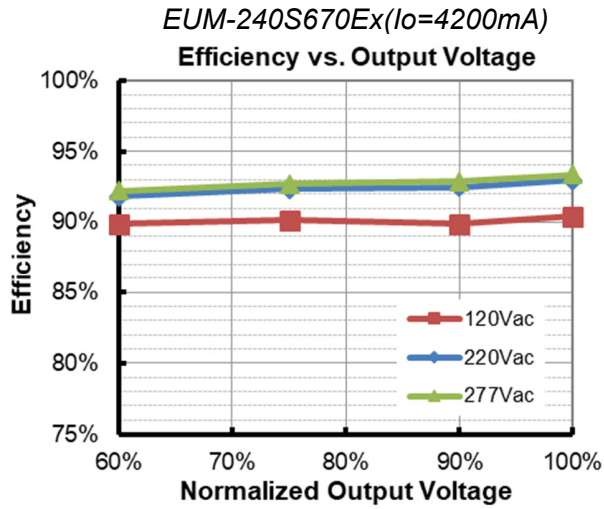

Power Factor

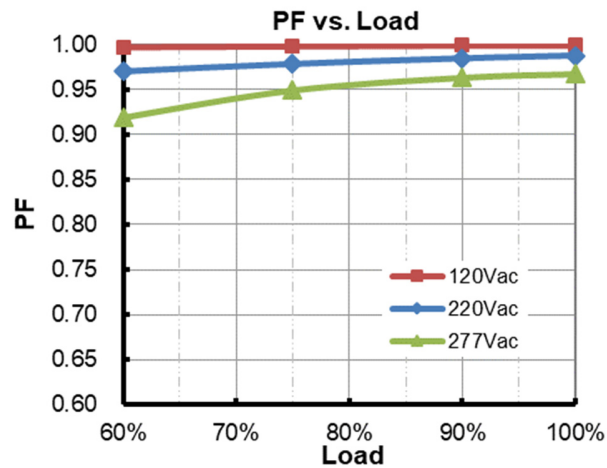


Total Harmonic Distortion

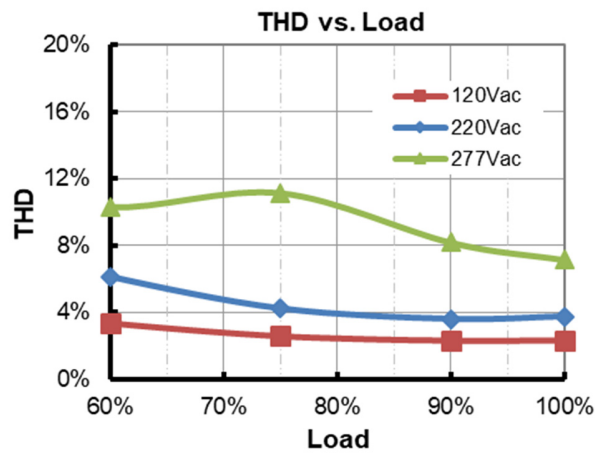


Protection Functions

Parameter		Min.	Typ.	Max.	Notes
Over Voltage Protection		Limits output voltage at no load and in case the normal voltage limit fails.			
Short Circuit Protection		Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.			
Over Temperature Protection		Decreases output current, returning to normal after over temperature is removed.			
Input Under Voltage Protection (IUVP)	Input Under Voltage Protection	70 Vac	80 Vac	90 Vac	Turn off the output when the input voltage falls below protection voltage.
	Input Under Voltage Recovery	75 Vac	85 Vac	95 Vac	Auto Recovery. The driver will restart when the input voltage exceeds recovery voltage.
Input Over Voltage Protection	Input Over Voltage Protection	310 Vac	320 Vac	330 Vac	Turn off the output when the input voltage exceeds protection voltage.
	Input Over Voltage Recovery	300 Vac	310 Vac	320 Vac	Auto Recovery. The driver will restart when the input voltage falls below recovery voltage.
	Max. of Input Over Voltage	-	-	350 Vac	The driver can survive stabilized input over voltage conditions up to 350Vac for a total of 8 hours.

● Input Under Voltage Protection Diagram

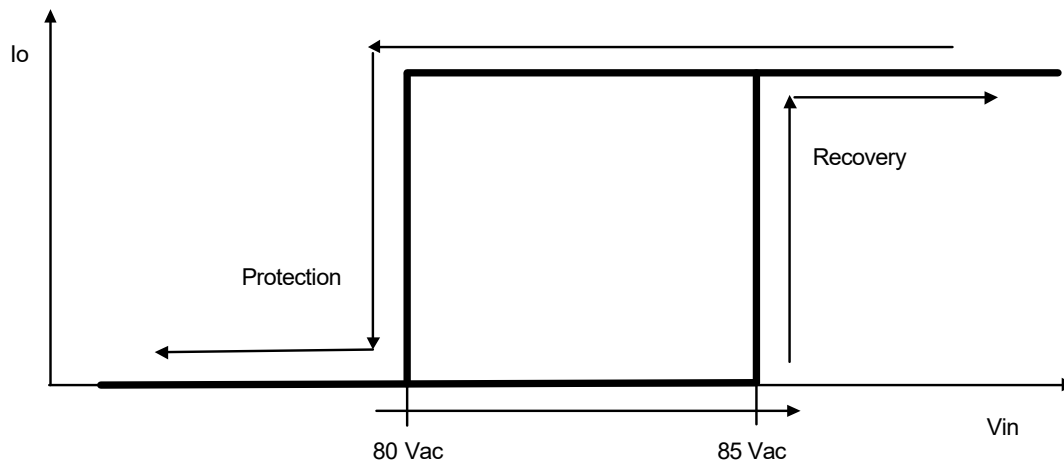




● Input Over Voltage Protection Diagram

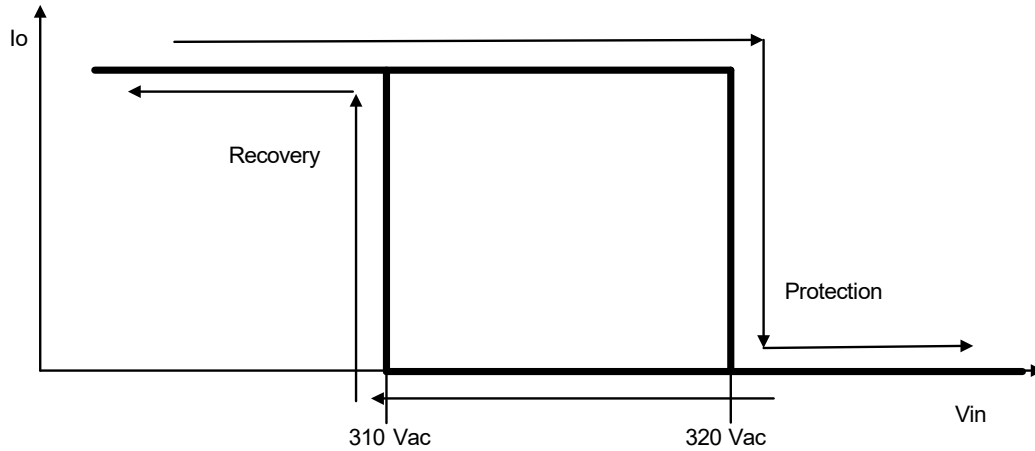

Dimming

● DALI-2 Dimming

The recommended implementation of the dimming control is provided below.

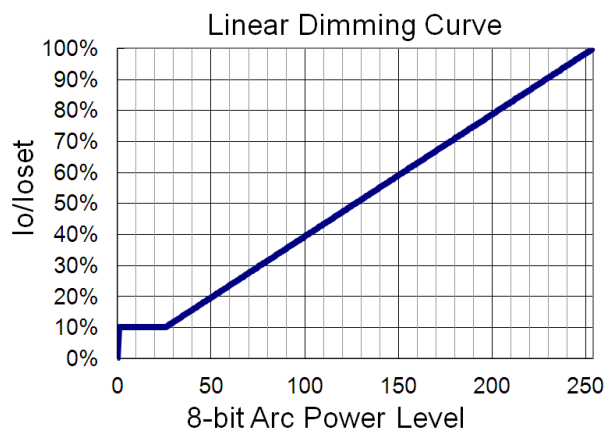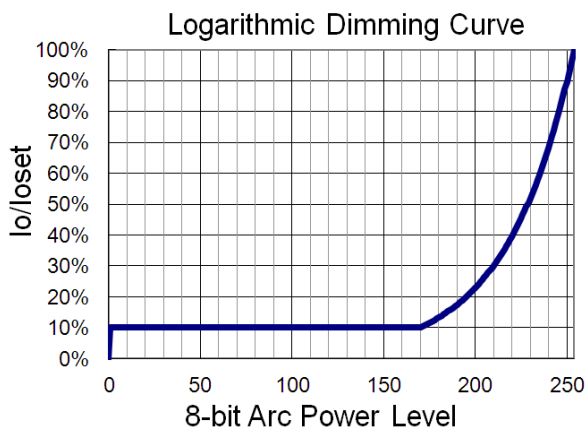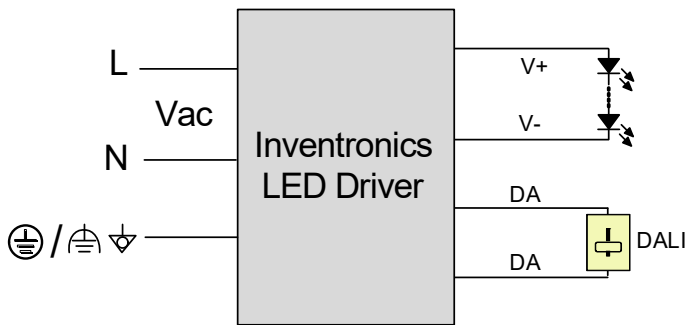

Implementation: DALI-2 Dimming

● Time Dimming

Time dimming control includes 3 kinds of modes, they are Self Adapting-Midnight, Self Adapting-Percentage and Traditional Timer.

- **Self Adapting-Midnight:** Automatically adjusts the dimming curve based on the on-time of past two days (if difference <15 minutes), assuming that the center point of the dimming curve is midnight local time.
- **Self Adapting-Percentage:** Automatically adjusts the on-time of each step by a constant percentage = (actual on-time for the past 2 days if difference <15 min) / (programmed on-time from the dimming curve).
- **Traditional Timer:** Follows the programmed timing curve after power on with no changes.


● Output Lumen Compensation

Output Lumen Compensation (OLC) may be used to maintain constant light output over the life of the LEDs by driving them at a reduced current when new, then gradually increasing the drive current over time to counteract LED lumen degradation.

● End Of Life

End-of-Life (EOL) is providing a visual notification to a user that the LED module has reached the end of manufacturer-specified life and that the replacement is recommended. Once active, an indication is given at each power-up of the driver, which the driver indicates this through a lower light output during the first 1 minute before normal operation is continued.

Programming Connection Diagram

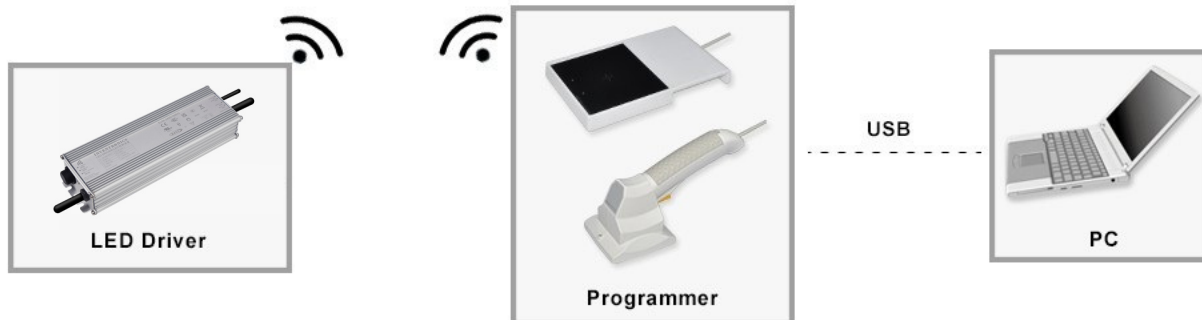


Note: The driver does not need to be powered on during the programming process.


- Please refer to [PRG-NFC-H](#) or [PRG-NFC-D2](#) (Programmer) datasheet for details.

Mechanical Outline


EUM-240S070EG

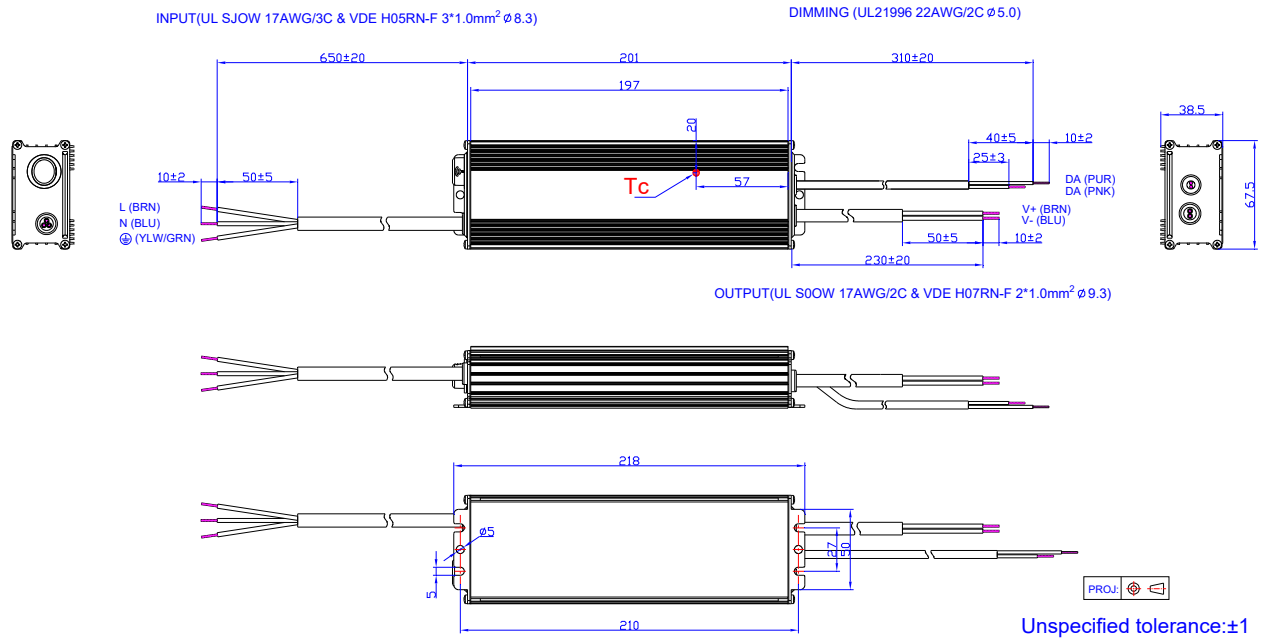


EUM-240S105EG/EUM-240S150EG/EUM-240S350EG/EUM-240S670EG

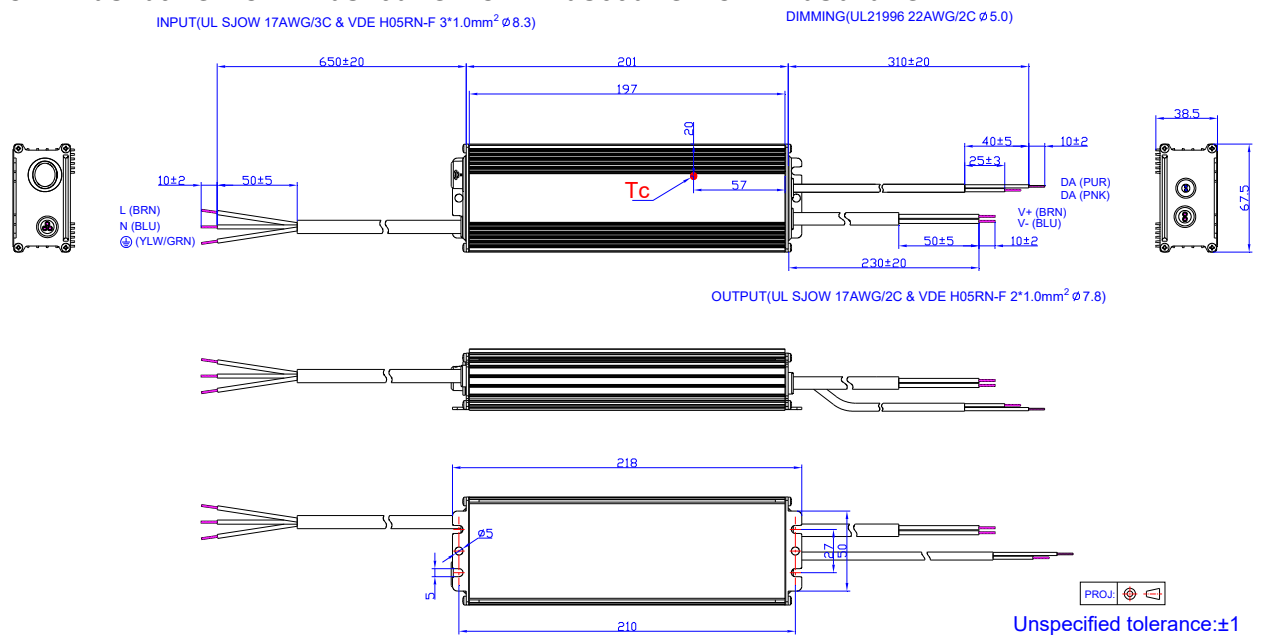


EUM-240S070ET

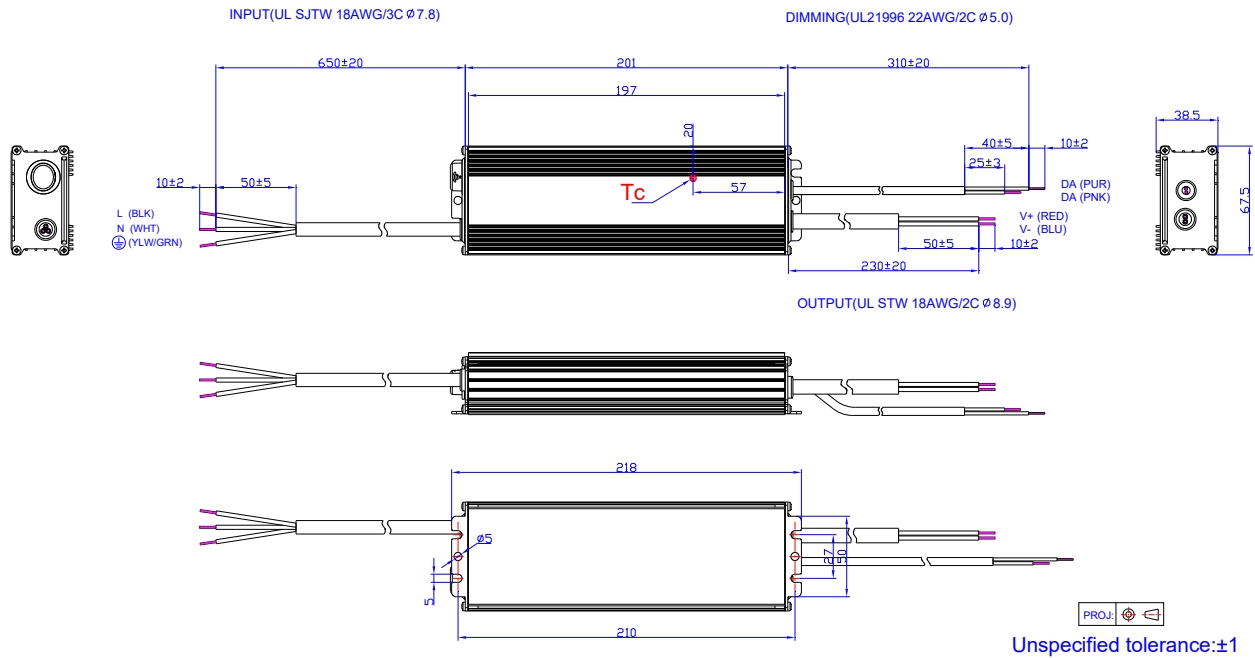

EUM-240S105ET/EUM-240S150ET/EUM-240S350ET/EUM-240S670ET

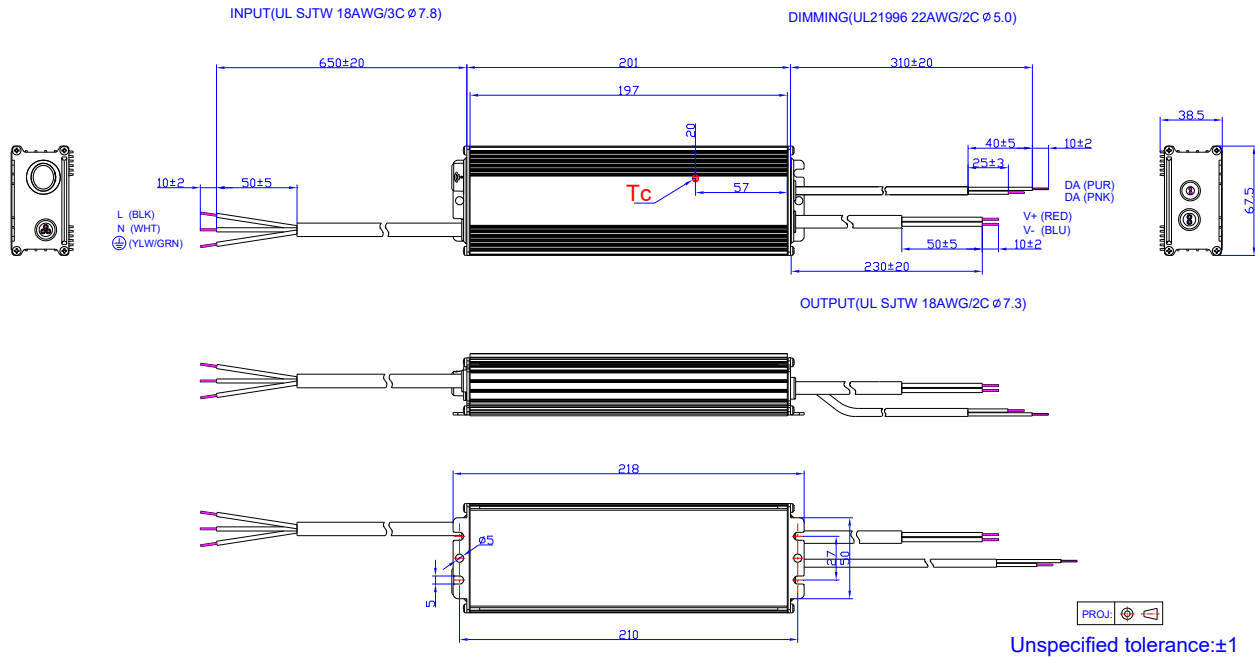

EUM-240SxxxEE

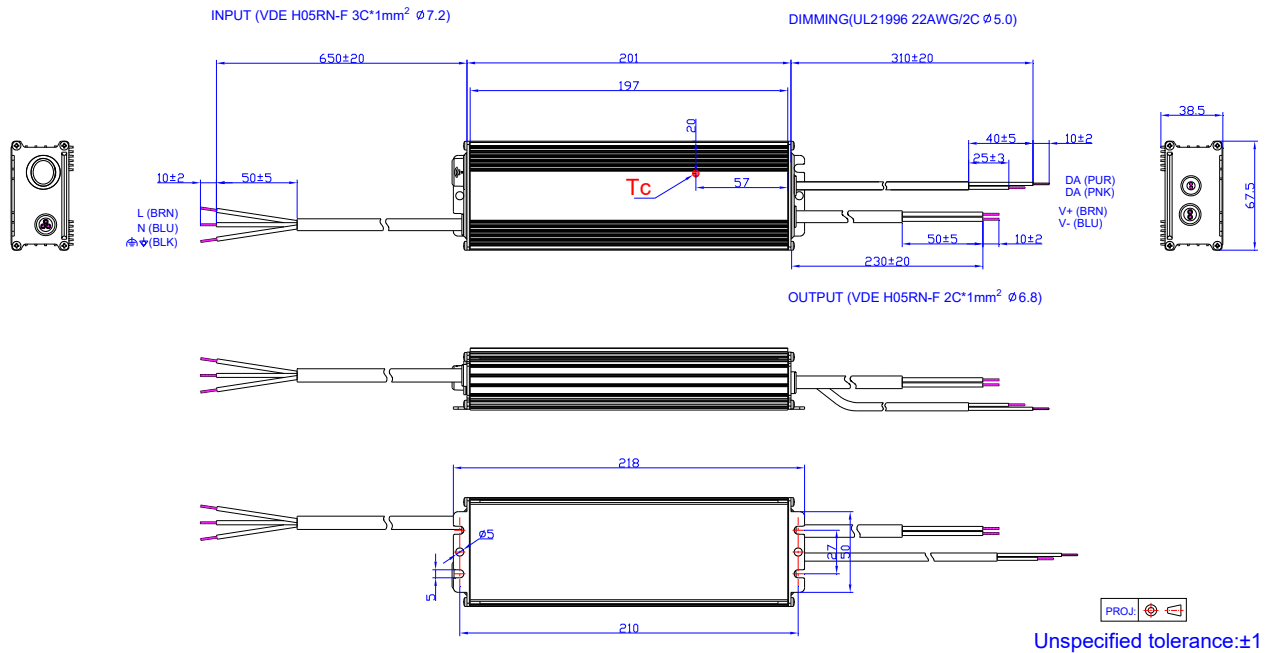

RoHS Compliance

Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2023-07-20	A	Datasheet Release	/	/