

Product Description

LF-GMR020YS II is a flicker free LED driver with metal casing. Rated input voltage: 220-240Vac; maximum output power: 23.1W; output voltage: 33-42Vdc; output current: 200-550mA. It has features of soft-switching design, high efficiency and excellent flicker free effect, suitable for linear light, tri-proof light and etc.

Features

- Suitable for Class I light fixtures
- Flicker free
- High performance, high efficiency, low THD
- 5-year warranty (Please refer to the warranty condition.)




Applications

- Indoor office lighting
- Decorative lighting
- Commercial lighting
- Residential lighting



Product Naming

LF-GMR 020 YS II xxxx H

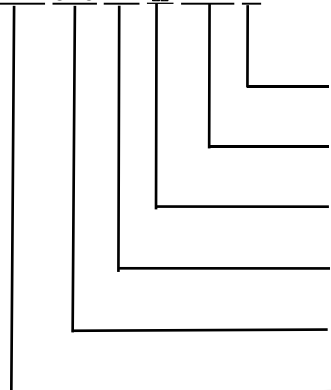

H: input voltage of 220-240Vac

xxxx: output current (e.g. 0550 for 550mA)

II: Gen. II

Y: conforms to certifications; S: a serial number

020: output power of 20W

G: isolated design; MR: linear LED driver


Electrical Characteristic

Model		LF-GMR020YS II xxxxH							
Output	Output Voltage	33-42V							
	Output Current	200mA	250mA	300mA	350mA	400mA	450mA	500mA	550mA
	Flicker Index	IEC-Pst≤1; CIE SVM≤0.4; Modulation Depth≤0.5%							
	Current Tolerance	±5%							
	Temperature Drift	±10%							
	Start-up Time	<0.5S @230Vac							
Input	AC Input Voltage	220-240Vac (limit: 200-264Vac)							
	DC Input Voltage	200-280Vdc							
	Input Frequency	47Hz-63Hz							
	Input Current	0.14A Max.							
	Power Factor	≥0.9@230Vac							
	THD	≤20%							
	Efficiency	≥85%				≥87%			
	In-rush Current	≤20A & 200uS @230Vac (Max)							
	Load Quantity Carried by the Circuit Breaker	Circuit Breaker Model	B10		C10		B16		C16
		Quantity (pcs)	22		36		35		59
	Leakage Current	≤0.7mA							
	Standby Power Consumption	≤0.5W							
Protection	Open Circuit Protection	<55V							
	Short Circuit Protection	Hiccup mode (auto-recovery)							
Environment Description	Operating Temperature	-30℃~+50℃							
	Operating Humidity	20-90%RH (no condensation)							
	Storage Temperature/ Humidity	-40℃~+ 80℃ (six months under class I environment); 10-90%RH (no condensation)							
	Atmospheric Pressure	86KPa~106KPa							


Safety and Electromagnetic Compatibility	Certification	ENEC, CB, CE, RCM, CCC, SAA
	Withstanding Voltage	I/P-O/P: 3.75kVac <5mA 60S; I/P-FG: 1.5kVac <5mA 60S; O/P-FG: 0.5kVac <5mA 60S
	Insulation Resistance	I/P-O/P, I/P-FG, O/P-FG >100MΩ@500VDC
	Safety Standard	EN61347-1:2015, EN61347-2-13:2014/A1:2017, EN62384:2016/A1:2009, EN61347-2-13:2014/A1:2017, EN61347-1:2015, EN62493:2015 IEC 61347-1:2015, IEC61347-2-3:2014, IEC61347-2-13:2014/AMD1:2016 AS61347.2-13:2018 GB19510.1-2009, GB19510.14-2009
	EMI	CE-EMC/RCM: EN55015, EN61000-3-2, EN61000-3-3 CCC: GB/T17743, GB17625.1, GB17625.2
	EMS	CE-EMC/RCM: EN61000-4-2,3,4,5 (L-N:1KV L/N-PG:2KV),6,11 CCC: GB/T17626.2,3,4,5 (L-N:1KV L/N-PG:2KV),6,11
Others	IP Rating	IP20
	RoHS	RoHS 2.0 (EU) 2015/863
	Warranty	5 yrs (Tc≤70℃)
Test Equipment	AC power source: CHROMA6530, digital power meter: CHROMA66202, Oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: TH9201B, flicker-free tester (flicker-free coefficient tester) 60N-01, etc.	
Remarks	1. It is recommended that customer should install overvoltage and undervoltage protection devices and surge protection devices in the power supply circuits of the light fixtures to ensure safety before connecting to electricity. 2. As an accessory, the LED driver is not the only factor determining the EMC performance of the LED light fixture. The structure and the wiring of the light fixture are also relevant. Thus it's strongly recommended the LED light fixture manufacturer re-confirms the EMC of the whole LED light fixture. 3. The test conditions of the circuit breaker configuration quantity are the same as those of the inrush current test. 4. Unless otherwise stated, the parameters of the power factor, harmonic and efficiency were test results under the ambient temperature of 25℃, humidity of 50%, input voltage of 230Vac(50Hz) and full load.	

Characteristic Curve


■ PF Curve

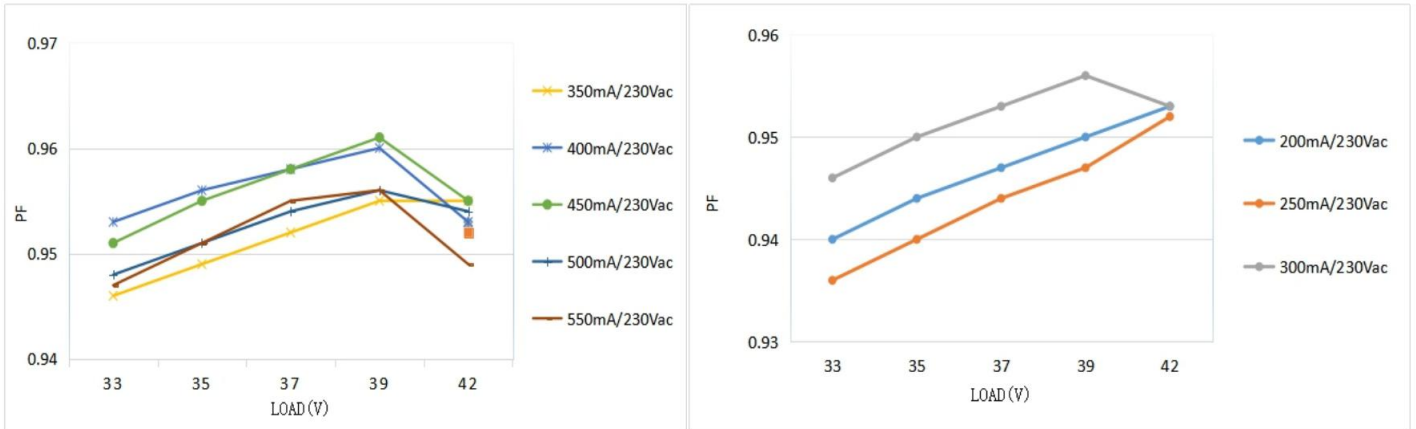

■ Efficiency Curve

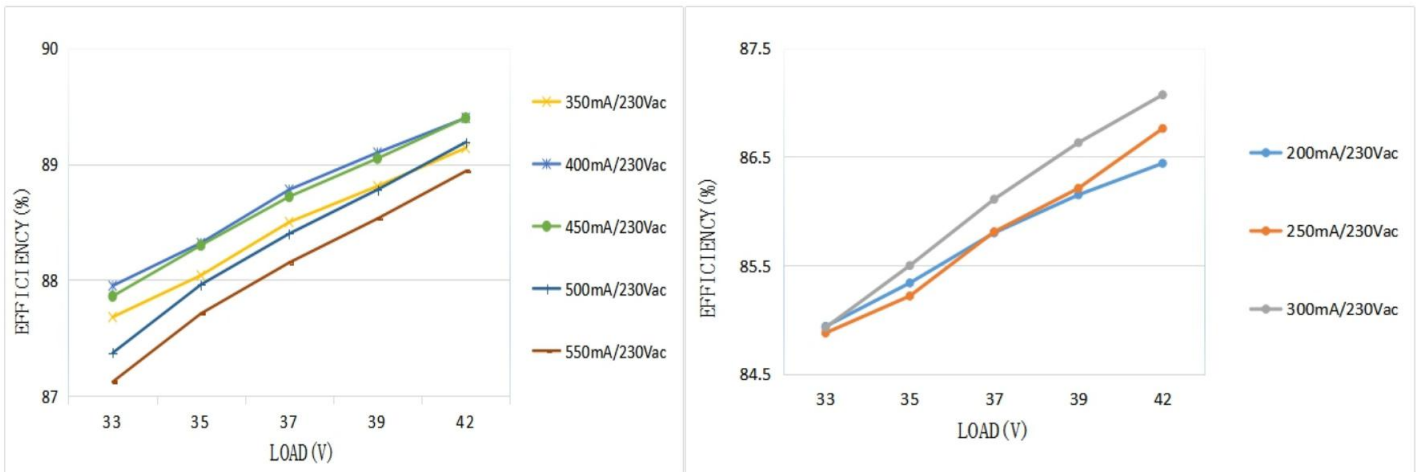

■ Lifetime Curve

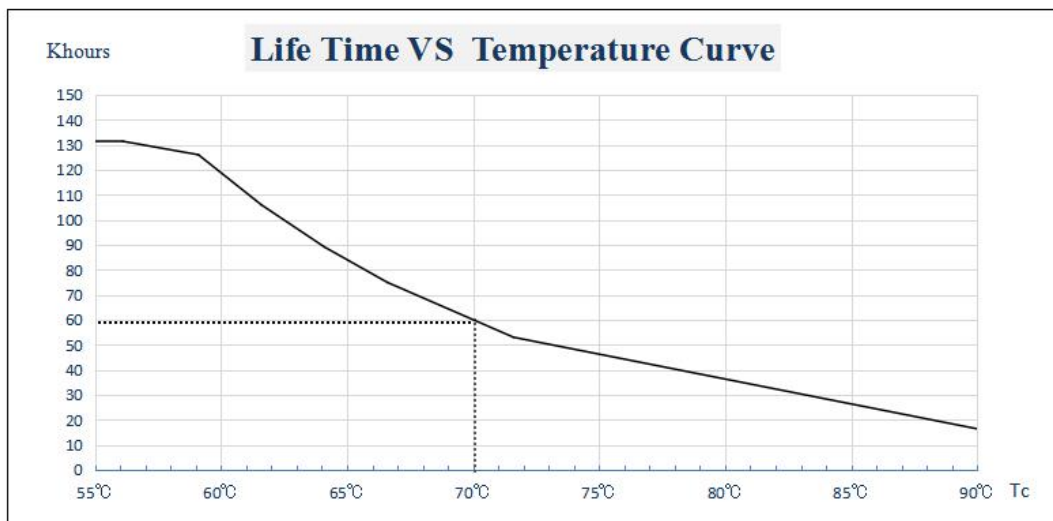

Packaging Specifications

Model	LF-GMR020YS II xxxxH
Packaging Dimensions	385*285*210 mm (L*W*H)
Quantities	12 pcs/layer; 6 layers/ctn; 72 pcs/ctn
Weights	90g±5%/pc; 6.50kg±5%/ctn

Transportation & Storage

1. Transportation

Transportation means: vehicles, boats and aircraft.

During transportation, there should be awnings for rain protection and sun protection. Civilized loading and unloading are required. There should be no severe vibration or impact.

2. Storage

Storage in accordance with the provisions of the Class I environment. For products which have been stored for more than six months, they mustn't be used until they pass the re-inspection.

Attention

- * Use this product according to the specifications, please. Otherwise there may be malfunction.
- * Use the light fixtures that have not been certified or are not compatible with the LED drivers may cause fire or other hazards.
- * Man-made damage, any use beyond the specification and non-original-factory modification are not covered by warranty.

Remark: The final interpretation right of the contents of this data sheet belongs to Lifud Technology Co., Ltd.