

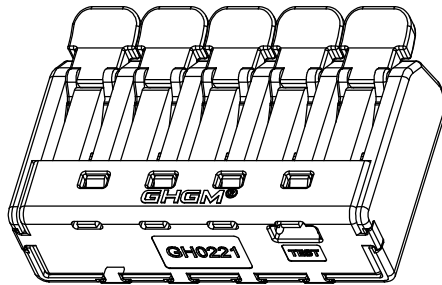



业务图
CUSTOMER

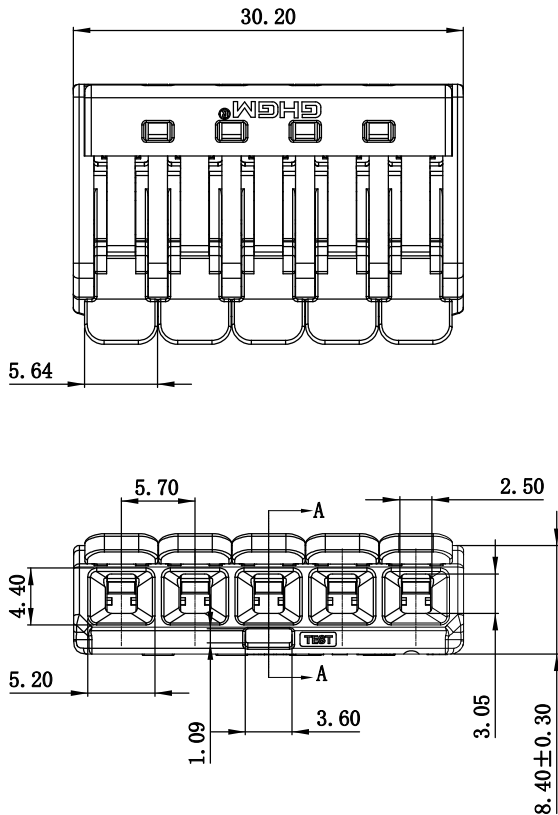

3D VIEW



SECTION A-A

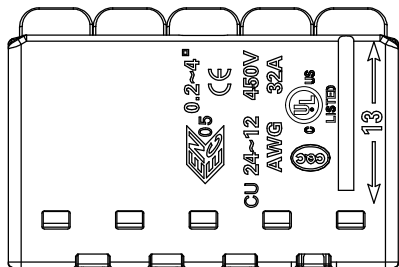

REV.	ECN No.	DESCRIPTION	DATE	DESIGN
A		NEW DRAWING	24.2.18	徐世娟

说明/Instructions

1. 材质/material:

- 1-1. 主体/Main body: PC UL94V-2
1-2. 侧盖/Side cover: PC UL94V-2
1-3. 手柄/controller: PA66 UL94V-0
1-4. 导体/conductor: 铜合金/Copper alloy; 1-5. 弹片/shard: 不锈钢/Stainless steel;

2. 电镀/electroplate: 镀亮锡/Bright tinning;

3. 规格参数/Specification parameter:

	IEC	UL
额定电压/Rated voltage:	450V	600V
额定电流/Rated current:	32A	20A
接线范围/Connection range:	4.0mm ² (Sol)	24~12AWG (Sol&Str)
	0.2~2.5mm ²	

4. 推荐剥线长度/Recommended cable stripping length: 12~13mm

5. 环境特性/Environmental characteristics:

- 5-1. 贮存温度范围/Storage temperature range: -10℃~+50℃/半年/Half a year
5-2. 运行温度范围/Operating temperature range: -40℃~+105℃

6. 符合RoHS标准/Comply with RoHS standards

系列码/Serial code: GH0221- X X XX

PIN数/The number:

- 2: 2P
3: 3P
4: 4P
5: 5P
9: 9P
A: 10P
B: 11P
C: 12P

颜色码/Color code:

- 1: 棕色/brown. 0: 黑色/black
2: 红色/red A: 混色 (2种) /Color mix (2 kinds)
3: 橙色/orange B: 混色 (3种) /Color mix (3 kinds)
4: 黄色/yellow C: 混色 (4种) /Color mix (4 kinds)
5: 绿色/green D: 混色 (5种) /Color mix (5 kinds)
6: 蓝色/blue
7: 紫色/purple
8: 灰色/gray
9: 白色/white

流水码/Pipeline code:

- 1: 混搭1/Mix-and-match 1
2: 混搭2/Mash-up 2
~:~
9: 混搭9/Mix-and-match 9
A: 混搭10/Mash-up 10
~:~
Z: 混搭25/Mix and match 25



厦门广泓工贸有限公司
XIAMEN GHGM INDUSTRIAL TRADE CO LTD

APPROVALS		DATE	UNLESS OTHERWISE SPECIFIED TOLERANCE		PRODUCT MODEL:	PART NO.	GH0221-5902	
DESIGN	徐世娟	2024.2.18	尺寸/size	角度/angle	GH0221系列/series	PART NO. (OLD)		
CHECKED			X. ±0.80	X. ±2°	TITLE:	DWG NO.	YW - GH0221 - 011	SHEET: 10F1
APPROVED			.X ±0.40	.X ±1°	GH0221 5P 接线端子 白柄半透绿盖 激光打标	SIZE: A4	UNIT: mm	SCALE: 1:1
			.XX ±0.25	.XX ±0.5°	GH0221 5P terminal white handle			
					Semi-transparent green cover laser marking			