

CUSTOMER

REV.	ECN No.	DESCRIPTION	DATE	APPROVED
A0		NEW DRAWING	21.10.12	IVES
A1		调整线径范围	24.08.08	YFC

PN: GH5903 - 03 0 01

SERIES CODE:
PIN No. 01~99
02: 2P TYPE:
03: 3P 0. FLAT BOTTOM
1. HOOK STYLE 1

NOTES:

1. MATERIALS:

- 1-1. PLASTIC: PA66 UL94V-0, WHITE;
1-2. TERMINALS: COPPER ALLOY+STAINLESS STEEL;

2. PLATING:

- 2-1. TERMINALS: NI PLATED;

3. ELECTRICAL PERFORMANCE:





	IEC	UL
VOLTAGE RATED:	450V	300V
CURRENT RATED:	17.5A	9A
CROSS SECTION:	0.75~1.5mm ² (Sol&Str) 16~18AWG (Sol&Str)	

4. STRIPPING LENGTH: 10~11mm

5. ENVIRONMENTAL CHARACTERISTICS:

- 5-1. STORAGE TEMPERATURE RANGE: -10℃~+50℃ HALF A YEAR
5-2. OPERATING TEMPERATURE RANGE: -40℃~+105℃

6. ROHS COMPLIANT

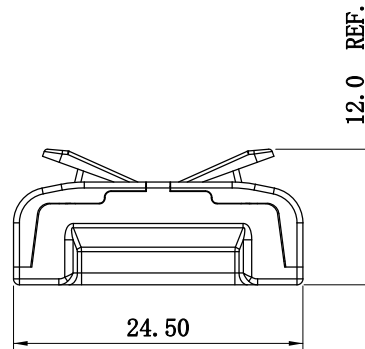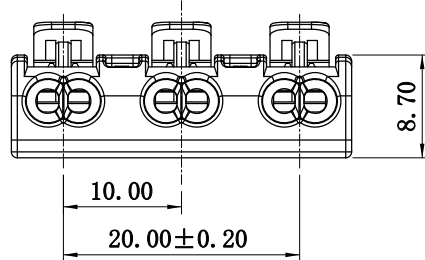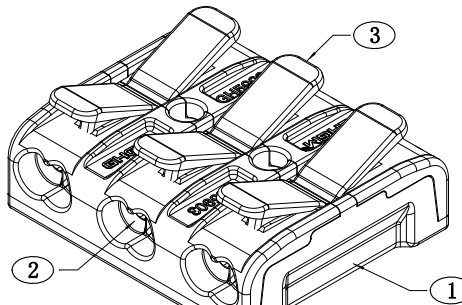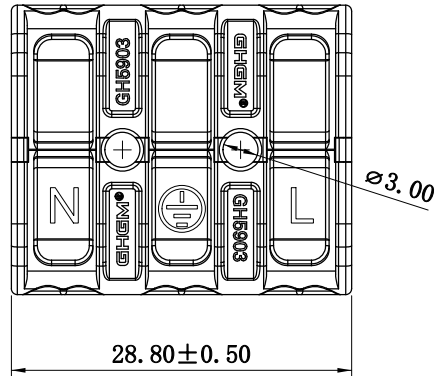

③	COVER	2	PA66 UL94V-0	SEE THE MARK	
②	TERMINAL	3	COPPER ALLOY+ STAINLESS STEEL	SEE THE MARK	
①	HOUSING	1	PA66 UL94V-0	SEE THE MARK	
NO.	DESCRIPTION	QTY.	MATERIAL	FINISH&COLOR	REMARKS

IE 厦门广泓工贸有限公司

APPROVALS		DATE	UNLESS OTHERWISE SPECIFIED TOLERANCE		PRODUCT MODEL:		PART NO.	GH5903-03001	
DESIGN	IVES	21.10.12	长度尺寸	角度	SCREW-LESS TERMINAL BLOCKS		PART NO. (OLD)		
CHECKED			X. ±0.80	X. ±2°	TITLE: GH5903 SERIES, 3P, FLAT BOTTOM, N Earth L		DWG NO.	021-1012-002	SHEET: 10F1
APPROVED	CHEN	21.10.12	.X ±0.40	.X ±1°			SIZE: A4	UNIT: mm	SCALE: 1:1
			.XX ±0.25	.XX ±0.5°					

WIRING SIZE

