

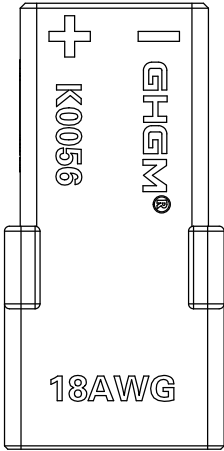
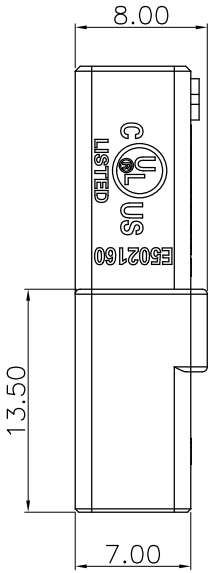
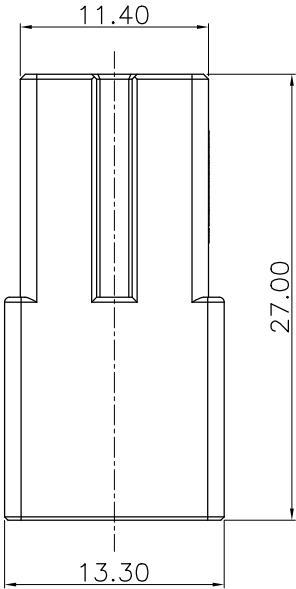
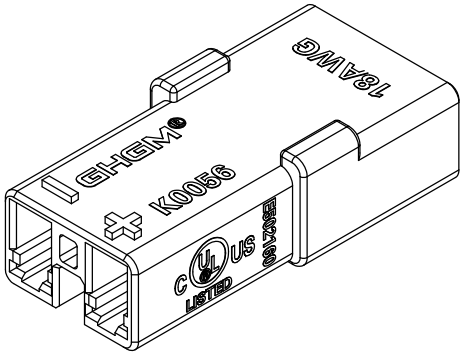


CUSTOMER



REV.	ECN No.	DESCRIPTION	DATE	APPROVED
A0		NEW DRAWING	21.09.23	IVES

NOTES:

1.MATERIALS:

1-1.HOUSING:PA66 UL94-V0;

1-2.TERMINALS:COPPER ALLOY, T=0.40mm;

2.PLATING:

2-1.TERMINALS:NICKEL 50u" MIN UNDER PLATED,

3.ELECTRICAL PERFORMANCE:

3-1.VOLTAGE RATED: 600V (AC/ DC) MAX

3-2.CURRENT INTERRUPTION:100 CYCLES

3-3.CURRENT RATED DEVICE:

3-3-1: 300V 6A 3-3-2: 600V 3A

3-4.INSULATION RESISTANCE:100MΩ MIN.

3-5.WITHSTANDING VOLTAGE:

2200V AC R.M.S/1MINUTE

3-6.CONTACT RESISTANCE:60mΩMAX.(INITIAL)

100mΩMAX.(AFTER LIFE TEST)

3-7.STRIP LENGTH:8-9mm

3-8.CROSS SECTION:18 AWG

4.ENVIRONMENTAL CHARACTERISTICS

4-1.STORAGE TEMPERATURE RANGE:-10°C~+50°C

HALF A YEAR

4-2.OPERATING TEMPERATURE

RANGE:-40°C~+105°C

5.ROHS COMPLIANT

UL NUMBER:E502160(STANDARD UL2459)

②	TERMINAL	2	COPPER ALLOY	SEE NOTE 2	
①	HOUSING	1	SEE NOTE 1	SEE NOTE 1	
NO.	DESCRIPTION	QTY.	MATERIAL	FINISH&COLOR	REMARKS

厦门广泓工贸有限公司

APPROVALS		DATE	UNLESS OTHERWISE SPECIFIED TOLERANCE		PRODUCT MODEL:		PART NO.		
DESIGN	IVES	21.09.23	长度尺寸	角度			PART NO. (OLD)		
CHECKED			X. ±0.80	X. ±2°			DWG NO.	021-0923-002	SHEET:10F1
APPROVED			.X ±0.40	.X ±1°	TITLE: K0056		SIZE:A4	UNIT:mm	SCALE: 1:1
			.XX ±0.25	.XX ±0.5°					