
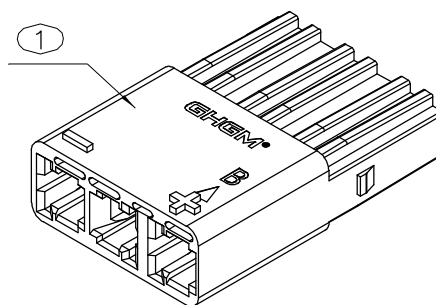
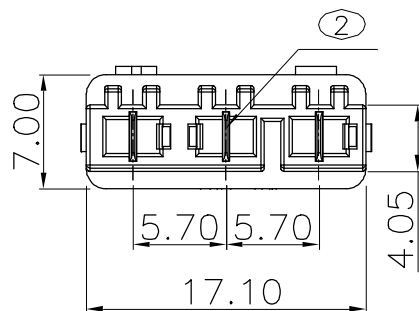
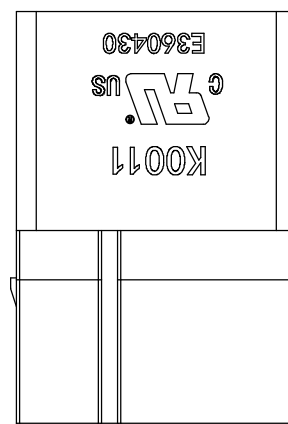
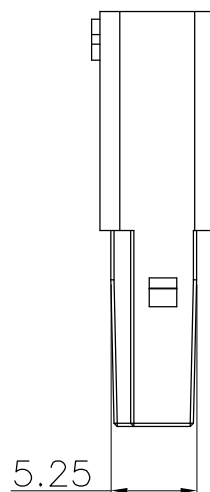


CUSTOMER

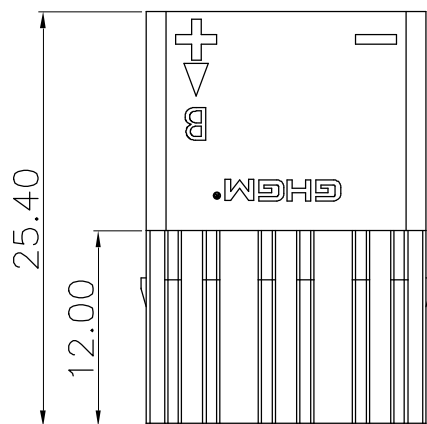

3D VIEW

REV.	ECN No.	DESCRIPTION	DATE	APPROVED
A		NEW DRAWING	18.10.17	ZZW

NOTES:

1. MATERIALS:

1-1. HOUSING: PA66 UL94-V0;

1-2. TERMINALS: COPPER ALLOY, T=0.40mm;

2. PLATING:

2-1. TERMINALS: NICKEL 50u" MIN UNDER PLATED,

3. ELECTRICAL PERFORMANCE:

3-1. VOLTAGE RATED: 600V (AC/DC) MAX

3-2. CURRENT INTERRUPTION: 100 CYCLES

3-3. CURRENT RATED DEVICE:

600V 6A

3-4. INSULATION RESISTANCE: 100MΩ MIN.

3-5. DIELECTRIC WITHSTANDING VOLTAGE:

2200V AC R.M.S/1MINUTE

3-6. CONTACT RESISTANCE: 60mΩ MAX. (INITIAL)

100mΩ MAX. (AFTER LIFE TEST)

3-7. STRIP LENGTH: 8-9mm

3-8. CROSS SECTION: 18 ~ 22 AWG

4. ENVIRONMENTAL CHARACTERISTICS

4-1. STORAGE TEMPERATURE RANGE: -10°C ~ +50°C

HALF A YEAR

4-2. OPERATING TEMPERATURE RANGE: -40°C ~ +105°C

5. ROHS COMPLIANT

UL NO: E360430 (Standard: UL1977)

PATENT NO: US 9,972,931 B1

②	TERMINAL	2	COPPER ALLOY	SEE NOTE 2	
①	HOUSING	1	SEE NOTE 1	SEE NOTE 1	
NO.	DESCRIPTION	QTY.	MATERIAL	FINISH&COLOR	REMARKS

厦门广泓工贸有限公司

APPROVALS		DATE	UNLESS OTHERWISE SPECIFIED TOLERANCE		PRODUCT MODEL:		PART NO.	GK57003N2B003	
DESIGN	ZZW	18.10.17	长度尺寸	角度	K0011		PART NO. (OLD)		
CHECKED	DCQ	18.10.17	X ±0.80	X ±2°	TITLE: W-T-W 3P PLUG CONNECTOR(ORANGE)		DWG NO.	018-0507-001	SHEET: 10F1
APPROVED	CHEN	18.10.17	.X ±0.40	.X ±1°			SIZE: A4	UNIT: mm	SCALE: 1:1
			.XX ±0.25	.XX ±0.5°					