


CUSTOMER

REV.	ECN No.	DESCRIPTION	DATE	APPROVED
A		NEW DRAWING	21. 03. 12	WFZ

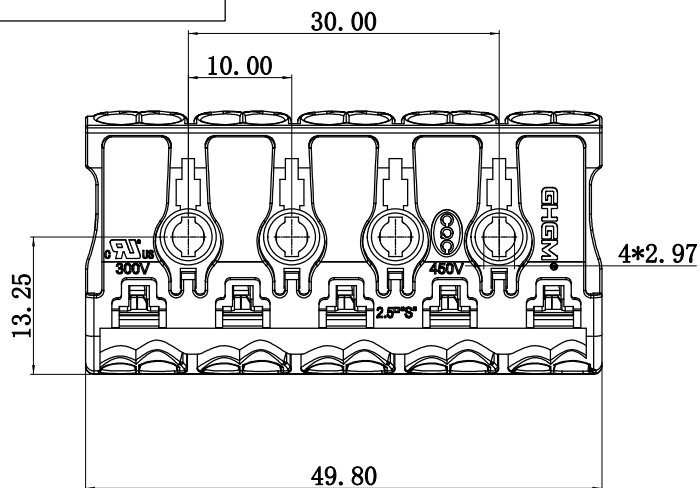

NOTES1:

1. UL Standard:

Rated voltage/current: 300V/16A;

Wire range:

1.1 The factory side:

A hole: 20~14 AWG Sol wire&Str wire

B hole: 20~16 AWG Sol wire&Str wire

1.2 The user side:

a/b hole: 20~14 AWG Sol wire&Str wire

2. IEC Standard:

Rated voltage/current: 450V/24A;

1.1 The factory side:

A hole: 0.5~2.5mm² Solid wire&Twisted wire

B hole: 0.5~1.5mm² Solid wire&Twisted wire

1.2 The user side:

a/b hole: 0.5~2.5mm² Solid wire&Twisted wire
&stranded wire

3. Pitch: 10.0mm, Poles: 5P




4. Stripping length: 8~9mm

5. Withstanding voltage: 2500AC/1Min

6. Operating temperature:

Storage temperature:-10° C~+50° C /half a year

Ambient temperature:-40° C~+105° C

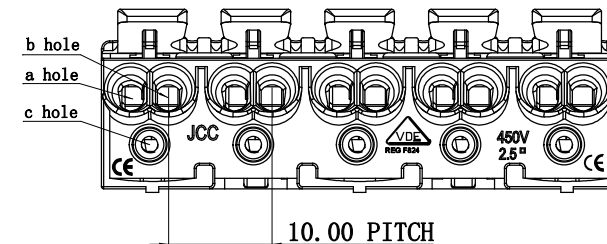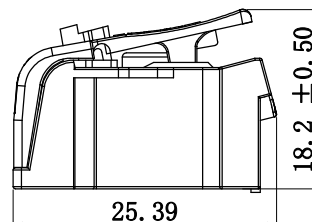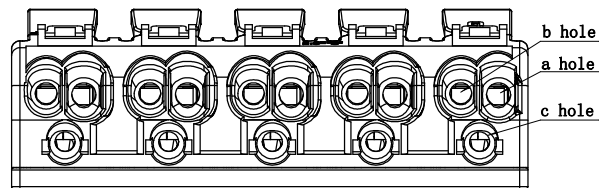

PRODUCT MODEL: GH0923 - 5 1 0

(Series No.)

10.0mm (Pitch)

02~05 (Poles)

(Color)

0:Yellow
1:Grey
2:Green
3:Blue
4:White
5:Orange

000~999

1: Single Pitch
2: double Pitch

Standard:
0~9: (Marking)

Structure:

- 1:standard type
- 2:With the J hook
- 3:With a symmetrical hook
- 4:Standard type + grounding lug
- 5:With the J hook+grounding lug
- 6:With a symmetrical hook+grounding lug
- 7:Standard large hole

Recommended lock screw fixing size



Xiamen Guanghong Industry and Trade Co., LTD

APPROVALS		DATE	UNLESS OTHERWISE SPECIFIED TOLERANCE		PRODUCT MODEL:	PART NO.	GH0923-510	
DESIGN	WFZ	21. 03. 12	长度尺寸	角度	GH0923series	PART NO. (OLD)	JCCA100-0541XXX	
CHECKED			X. ±0.80	X. ±5°	TITLE:	DWG NO.	YW-GH0923-112	SHEET:10F1
APPROVED			.X ±0.40	.X ±3°	923 Shrapnel terminal spacing	SIZE:A4	UNIT:mm	SCALE: 1:1
			.XX ±0.25	.XX ±2°	10mm 5 bits with VDE mark white, light plate without printing			