

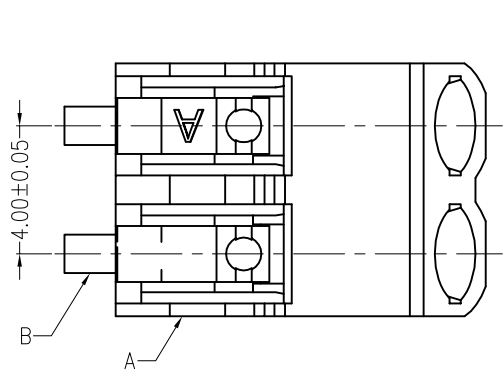


A	B	C	D	E	F
客户料号:					

1

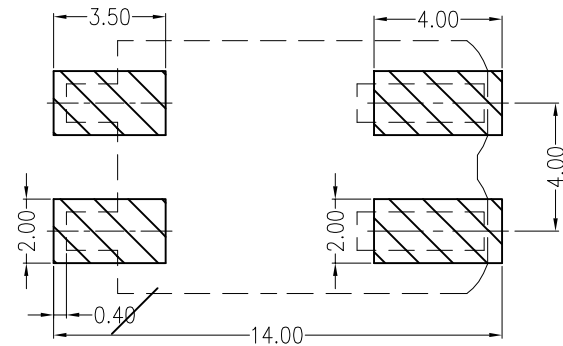

2

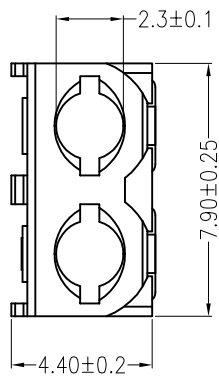


1



2

Board Layout

3

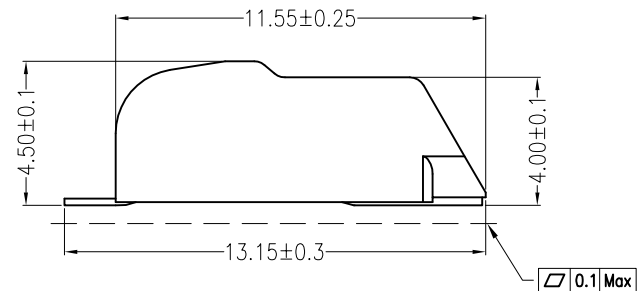

4

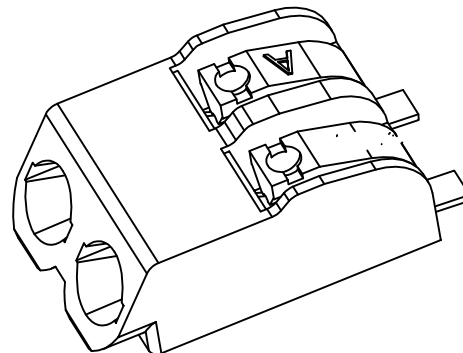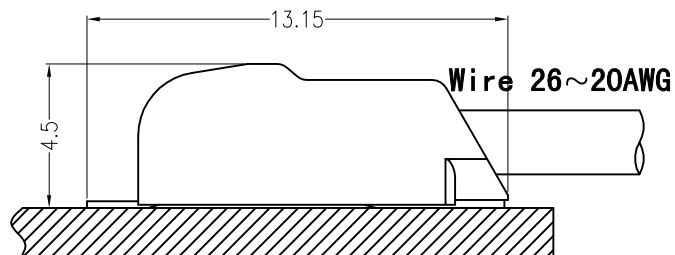

3

4

主要技术参数 Main Specifications

线 数 (Poles): 01 to 03P
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 800\text{M}\Omega$
额定电压 (Rated voltage): 250V AC DC
额定电流 (Rated current): 6.0A AC DC
耐 电压 (Withstand Voltage): 800V AC/minute
温度范围 (Temperature Range): $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Installation drawing

5

GOOSVN	APPROVED BY		UNIT	TOLERANCE	REV	EC#. NO	REVISION RECORD	NAME	DATE	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
	邵敬和		mm	X.X ±0.30	A/0		NEW RELEASE	张一荣	2014.03.18	A	Insulator	1	LCP (UL94V-0)	Beige
	CHECKED BY		SCALE	X.XX ±0.20	A/1		更换图框	李 润	2016.05.04	B	Contacts	2	PhosphorBronze	Tin-plated
	伏 何		FULL	X.XXX ±0.10						C				
MODEL NO: GSL45-02P	DRAWN BY	DATE	SHEET	ANGLE										
MODEL NAME: 4.0mmPITCH 90° WAFER SMT TYPE	李 润	2014.03.18	1/1	X° ±3.0°										

5

A	B	C	D	E	F
---	---	---	---	---	---