



Product Features

- 1, Constant current output
- 2, Used with Li-ion battery, The battery is supplied separately depending on the operating time like in Table with Emergency Characteristics.
- 3, High Quality of light
- 4, High Reliability
- 5, Low Output Current Ripple
- 6, Isolated
- 7, Internal usage
- 8, Emergency power: 4W

1) Compliances and Approvals

Approvals	CE EAC
Built-in/independent	Built in
Ingress protection	IP20
Suitable for fixture of protection Class	Class I
Output Safety Level	Isolated
Enviromental	Indoor
Features	Fixed

2) Electric Input Characteristics

	Symbol	Remarks	Min.	Typical	Max.	Unit
Input Voltage						
Rated mains voltage	Vin	Nominal range	220	-	240	Vac
Mains voltage range	Vin.op	operational	195	-	264	Vac
Mains frequency nominal	fn	Nominal range	50		60	Hz
Rated mains voltage	Vin	Nominal range		NA		Vdc
Input Current						
Input current	Iin	@230Vac, full load		0.23		A
Input inrush current		@264Vac, 50% width		46A,180us		A, us
Power Factor	PF	@230Vac, full load	0.95			
Total Harmonic distortion	THD	@230Vac, full load			10	%
System Efficiency	η	@230Vac, full load		89		%
Input Power						
Input Power	Pin	@230Vac, full load			48	W
Input Power@ open load		rated input voltage			1	W
Input Power@ standby		rated input voltage		NA		

3) Electric Output Characteristics

	Symbol	Remarks	Min.	Typical	Max.	Unit
Output Voltage						
Output voltage range	Vo	measured at end of wire	80		115	Vdc
Output voltage @no load	Vo.max	open load		150		Vdc
Output Current						
Output Current	Io			350		mA
Output Current tolerance			-5		5	%
Current Ripple		@230Vac (Imax-Imin)/(Imax+Imin)		1		%
Output Power						
Output Power	Po	output performance power			40	W
Isolation						
In-Out		3000Vac. for 1min			10	mA

4) Emergency Characteristics

	Symbol	Remarks	Min.	Typical	Max.	Unit
Emergency Power		@230Vac, full load		4		W
Recharge Time				24		Hours
Emergency Periods and battery		@One cell Li-ion 18650 3.6V 2.6Ah	90			Min
Emergency Periods and battery		@Two cell Li-ion 18650 3.6V 2.6Ah	180			Min
Self-testing				With		

5) Robustness	Symbol	Remarks	Min.	Typical	Max.	Unit
General						
Electric strength	Input-Output	50Hz/60Hz and be applied for 1 min		3000		Vrms
	Input-GND			1480		Vrms
Insulation Resistance Test		500Vd.c. for 1min, For SELV part is 100 Vd.c.	2			MΩ
Reliability						
Rated Life@Tc.max		10% failure			50K	Hrs
Rated Life@Tc.life		10% failure			100K	Hrs
Surge	L-N			1		kV
Surge	L/N-PE			2		kV
Environment Operation						
Ambient temperature	Ta		0		45	°C
Maximum Tcase	Tc.max				65	°C
Tc life	Tc.life				55	°C
Operation Humidity	H.op		10		75	%
Environment Storage						
Storage temperature	T.st		-10		45	°C
Storage Humidity	H.st		10		75	%
Abnormal Condition						
Input Over Voltage		Protected, no damage to driver ^①		Without		Vac
Output Short Circuit		Protected, no damage to driver ^②		With		
Output Open load		Output voltage limited to Vo.max ^③		135		Vdc
Too High Ambient Temperature		Protected by built-in thermal protection in controller IC ^④		With		
Input Over Power		Input power should be limited and no damage to driver ^⑤			48	W

① If the LED driver connects to Input Voltage 380Vac, then the protection Turn On and the Led driver is switched off until its connect to Input voltage 220-240Vac.

In this protection mode, the led driver does not blink and can be not damage more than 48 hours

② Auto Recovery

③ Auto Recovery

④ The output current decreases

⑤ There is risk to damage the LED driver or decreases the life time

6) Warranty

- Warranty 5 years

- Except for the following circumstance:

- 1) Improper Installation or operation
- 2) Misuse
- 3) Abuse
- 4) Unauthorized or improper repair alteration
- 5) Accident or negligence in use, storage, transportation.
- 6) Any natural destroy
- 7) Exceed the specification as per the product datasheet
- 8) The battery needs to be replaced every 12 months, the Customer must install a battery purchased from OSSDAT .


7) Mechanical properties **Symbol** **Remarks** **Unit**

Dimensions

L	W	H	M	
230(A1)	40.5(B1)	29(C1)	219.5(A2)	mm

Housing Material

Metal

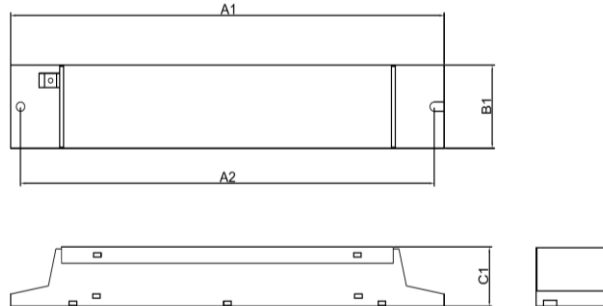

8) Physical properties **Symbol** **Remarks** **Unit**

Weight

268

gram

Qty to Carton

50

pcs

Carton Size:

42.5*24*19.5

cm

G.W:

14.5

kgs

Potting Raw materials

without

Printing

printing can be changed by customer's email confirmation

size:172*37mm

INPUT

PL-HMEM-040WACC350-000M
LED Emergency power supply

Uin,Vac	Fn,Hz	Pin,W	Iin,A	PF	Uout,Vdc	Umax,Vdc	Iout,mA	Ta,°C	Tc,°C
220-240	50/60	48	0.23	0.95	80-115	150	350	0...45	65

● tc:test point

CE EAC

9-10 mm Cable 0.5-0.75

Made in China

NingBo Luxdator Electrical Co., Ltd.

OUTPUT

Light indication
Test button
External battery

Emergency Power:4W

One Cell Li-Ion 3.6V 2.6Ah - 90min duration

Two Cell Li-Ion 3.6V 2.6Ah - 180min duration

One external battery is supplied separately

Connection

	Signal	Cable Description	Remark
Input	PE	0.5-0.75mm ²	grey, push-in terminal
	L	0.5-0.75mm ²	grey, push-in terminal
	LS	0.5-0.75mm ²	grey, push-in terminal
	N	0.5-0.75mm ²	grey, push-in terminal
Output	+	0.5-0.75mm ²	red, push-in terminal
	-	0.5-0.75mm ²	black, push-in terminal

Connection Marking

Yes

Note: User can connect external 3.6V Li-ion battery outside of housing for different time



LED indicate

Test switch

Technical drawing of a mechanical part. The drawing shows a side view of a component with a central rectangular section of width $A1$ and height $B1$. To the left of this section is a smaller rectangular feature with a width of $105 \pm 5 \text{ mm}$. A break symbol (two wavy lines) is shown between the smaller feature and the main section, indicating that the part is not to scale. A scale bar labeled 'mm' is provided for reference.

- Li-ion 18650 battery 3.6V
- Battery build in housing for 1.5 hour (3.6V/2600mA)
- Rated 500 charge/discharge cycle
- Ambient temperature 0°C to +50°C
- Ensures safety in use
- Overcharge-/Overdischarge protection
- The battery needs to be replaced every 12 months
- To guarantee the rated discharge time, please charge the battery for at least more than 12 hours.
- Charge and discharge cycle needs to be done at least once every three months, and the continuous charging time can not exceed 3 months.

11) Directives / Test Standards

Directives / Test Standards

Safety

IEC61347-1、IEC61347-2-13

EMC

EN55015、CISPR15、EN61000-3-2、EN61547、EN61000-4-2、EN61000-4-3、EN61000-4-4、
 EN61000-4-5、EN61000-4-6、EN61000-4-11

12) Addition Remarks

- The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. The manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished.

- The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets.


Operating conditions of the LED drivers may never exceed the specifications as per the product datasheet.

- All parameters, if not specified, are measured at 230Vac full loading and 25℃ ambient temperature.


- Do not forget to connect the battery to check the operation.

13) Performance


Lifetime vs. Temperature Curve

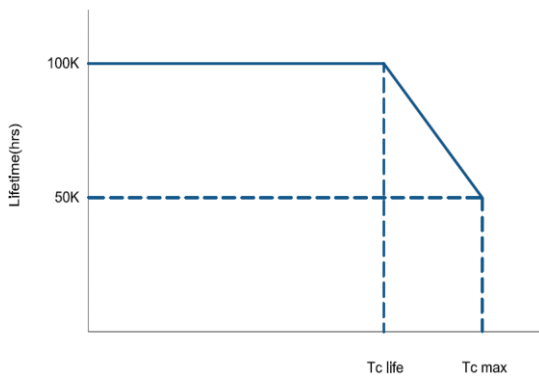

Operating window

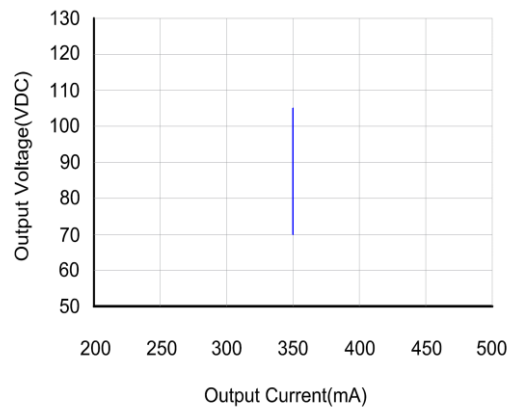

Efficiency VS. Load

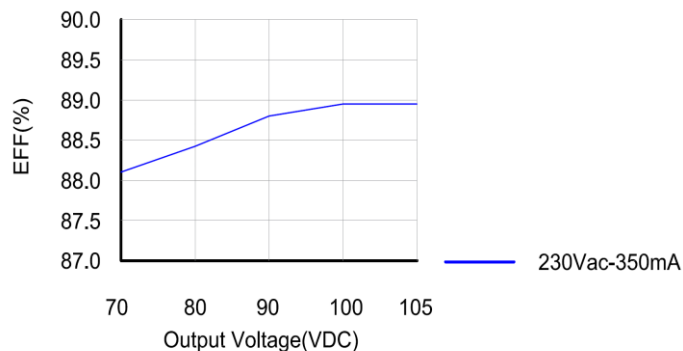

Power Factor Characteristics

