

CUSTOMER

REV.	ECN No.	DESCRIPTION	DATE	APPROVED
A0		NEW DRAWING	21. 10. 12	IVES
A1		调整线径范围	24. 08. 08	YFC

PN: GH5903 - 02 0 01
SERIES PIN No. CODE:
02: 2P TYPE: 01~99
03: 3P TYPE: 0. FLAT BOTTOM
1. HOOK STYLE 1

NOTES:

1. MATERIALS:

- 1-1. PLASTIC: PA66 UL94V-0, WHITE;
1-2. TERMINALS: COPPER ALLOY+STAINLESS STEEL;

2. PLATING:

- 2-1. TERMINALS: NI PLATED;

3. ELECTRICAL PERFORMANCE:

	IEC	UL
VOLTAGE RATED:	450V	300V
CURRENT RATED:	17. 5A	9A
CROSS SECTION:	0. 75~1. 5mm ² (Sol&Str) 16~18AWG (Sol&Str)	

4. STRIPPING LENGTH: 10~11mm

5. ENVIRONMENTAL CHARACTERISTICS:

- 5-1. STORAGE TEMPERATURE RANGE: -10℃~+50℃ HALF A YEAR





- 5-2. OPERATING TEMPERATURE RANGE: -40℃~+105℃

6. ROHS COMPLIANT

③	COVER	2	PA66 UL94V-0	SEE THE MARK	
②	TERMINAL	2	COPPER ALLOY+ STAINLESS STEEL	SEE THE MARK	
①	HOUSING	1	PA66 UL94V-0	SEE THE MARK	
NO.	DESCRIPTION	QTY.	MATERIAL	FINISH&COLOR	REMARKS

IE 厦门广泓工贸有限公司

APPROVALS		DATE	UNLESS OTHERWISE SPECIFIED TOLERANCE		PRODUCT MODEL:		PART NO.	GH5903-02001	
DESIGN	IVES	21. 10. 12	长度尺寸	角度	SCREW-LESS TERMINAL BLOCKS		PART NO. (OLD)		
CHECKED			X. ±0. 80	X. ±2°	TITLE: GH5903 SERIES, 2P, FLAT BOTTOM, N L		DWG NO.	021-1012-001	SHEET: 10F1
APPROVED	CHEN	21. 10. 12	. X ±0. 40	. X ±1°			SIZE: A4	UNIT: mm	SCALE: 1: 1
			. XX ±0. 25	. XX ±0. 5°					

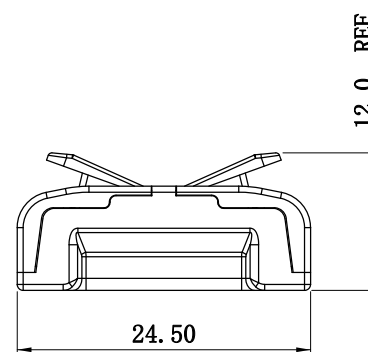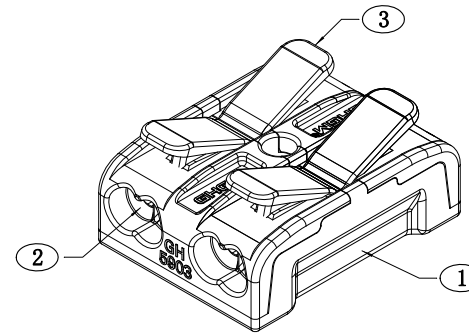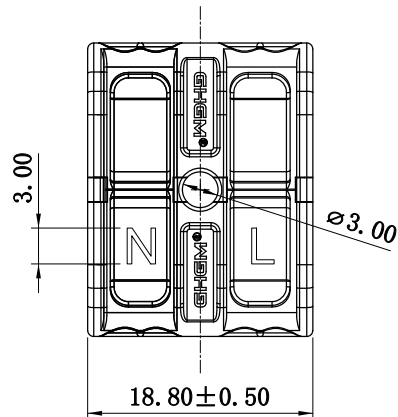

WIRING SIZE

